



September 20, 2017

Dr. Christopher H. Kiwus
Associate Vice President & Chief Facilities Officer
112 Sterrett Facilities Complex
Blacksburg, VA 24061

Dear Dr. Kiwus:

Please find attached the Virginia Tech 2017 Municipal Separate Storm Sewer System (MS4) Annual Report Response prepared by Virginia Tech Facilities Department – Site and Infrastructure Development (SID) for submission to the Virginia Department of Environmental Quality (DEQ). This report is Virginia Tech’s formal summary of compliance with the Virginia Stormwater Management Program Permit Regulations for Phase II MS4s.



Virginia Tech is located within the 3,500-acre Stroubles Creek watershed. It is the goal of Virginia Tech’s MS4 program to prevent any non-stormwater discharges into Stroubles Creek. DEQ, the governing state agency, regulates MS4s under section 9VAC25-890-40 of the Virginia Administrative Code. As a condition of the MS4 permit program, Virginia Tech is required to develop and implement its own stormwater management program to protect the Stroubles Creek watershed. Virginia Tech has developed and maintained such a program since 2003. The attached 2017 MS4 Annual Report Response is submitted to DEQ for an evaluation of the Virginia Tech MS4 program’s compliance with the permit regulations, including progress towards achieving measurable goals and identifying best management practices.

Your signature on the attached 2017 MS4 Annual Report Response supports the Virginia Tech stormwater management program under the aforementioned regulations. Please feel free to contact me if you require any additional information.

Sincerely,

Chuck Dietz, P.E.
Stormwater Compliance Manager

Enclosure

cc: Kim Briele, Associate Director of Engineering Operations 
Dwyn Taylor, Assistant Vice President for Facilities Operations & Construction 



MS4 Program Plan



VirginiaTech
Invent the Future[®]



VIRGINIA TECH MS4 PROGRAM PLAN

(Includes Annual Report Submittal for Year 4)

NPDES PHASE II: SMALL MS4 (Municipal Separate Storm Sewer System)

VPDES PERMIT NO. VAR 040049

EFFECTIVE DATE: JULY 1, 2013

EXPIRATION DATE: JUNE 30, 2018

**CERTIFICATION STATEMENT AND SIGNATORY REQUIREMENTS
FOR MS4 PERMIT APPLICATIONS AND REPORTS**

As required by 9VAC25-870-370 B, all reports required by state permits, and other information requested by the State Water Control Board shall be signed by a responsible official or by a duly authorized representative of that person. A responsible official is:

1. For a corporation: a responsible corporate officer. For the purpose of this section, a responsible corporate officer means: (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy-making or decision-making functions for the corporation, or (ii) the manager of one or more manufacturing, production, or operating facilities, provided the manager is authorized to make management decisions that govern the operation of the regulated facility, including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long-term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for state permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;
2. For a partnership or sole proprietorship: by a general partner or the proprietor, respectively; or
3. For a municipality, state, federal, or other public agency: either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a federal agency includes (i) the chief executive officer of the agency, or (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency.

A person is a duly authorized representative only if:

1. The authorization is made in writing by a person described above;
2. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company. A duly authorized representative may thus be either a named individual or any individual occupying a named position; and
3. The written authorization is submitted to the department.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

 9/26/17

Dr. Christopher H. Kiwus Date
Associate Vice President & Chief Facilities Officer

VAR040049 VIRGINIA TECH
Permit Number MS4 Name

SUBMITTAL DATE:

October 1, 2017

SUBMITTED TO:

B. Amanda Winks
Stormwater Compliance Specialist

Department of Environmental Quality
Blue Ridge Regional Office
3019 Peters Creek Road
Roanoke, Virginia 24019
Phone: (540) 562-6700
Email: bridget.winks@deq.virginia.gov

SUBMITTED BY:

Chuck Dietz, PE
Stormwater Compliance Manager

Virginia Tech Site & Infrastructure Development
230 Sterrett Drive (0529)
Blacksburg, VA 24061
Phone: (540) 231-1788
Email: charlid@vt.edu

INTRODUCTORY NOTE

Virginia Tech has held an MS4 General Permit since 2003. At the end of each five-year term, the University must submit a new program plan to the Virginia Department of Environmental Quality (DEQ). With approval from DEQ, this plan establishes guidelines for the Virginia Tech Stormwater Management Program for the next permit cycle. The following document is Virginia Tech's Program Plan submission for the 2013-2018 permit cycle. **Appendix A** of this document has been updated to reflect the accomplishments of the Virginia Tech Stormwater Management Program and acts as the annual report submission for each reporting year of the 2013-2018 permit cycle.

Permit requirements mandate six minimum control measures for the program (*Public Education and Outreach, Public Involvement and Participation, Illicit Discharge Detection and Elimination, Construction Site Stormwater Runoff Control, Post-Construction Stormwater Management, and Pollution Prevention and Good Housekeeping*). The Facilities – Site & Infrastructure Development (SID) Department has developed best management practices in order to comply with the minimum control measure requirements and all other requirements outlined in the permit.


TABLE OF CONTENTS

Introductory Note	3
Table of Contents	4
SID Organizational Structure	6
<i>Site & Infrastructure Development Department</i>	6
Responsible Party Contact Information	7
MS4 Overview	7
<i>Introduction</i>	7
<i>General Registration Statement Information</i>	7
<i>Description of Drainage Area</i>	8
Program Overview	8
<i>Total Maximum Daily Load</i>	8
<i>Minimum Control Measure 1 – Public Outreach and Education</i>	11
<i>Minimum Control Measure 2 – Public Involvement/Participation</i>	13
<i>Minimum Control Measure 3 – Illicit Discharge Detection and Elimination (IDDE)</i>	15
<i>Minimum Control Measure 4 – Construction Site Runoff Control</i>	17
<i>Minimum Control Measure 5 – Post-Construction Stormwater Management</i>	19
<i>Minimum Control Measure 6 – Pollution Prevention/Good Housekeeping</i>	21
Appendixes	26
Appendix A – Summary of BMPs & Measurable Goals	26
Minimum Control Measure 1 – Public Outreach & Education	27
1.1 – <i>Public Outreach Events for Target Audiences (Virginia Tech Students & Staff)</i>	27
1.2 – <i>Targeting Public Outreach Mediums for Target Audiences</i>	32
Minimum Control Measure 2 – Public Involvement/Participation	39
2.1 – <i>Promote Availability of the MS4 Program Plan & Annual Reports</i>	39
2.2 – <i>Public Involvement/Participation</i>	40
Minimum Control Measure 3 – Illicit Discharge Detection & Elimination	44
3.1 – <i>Illicit Discharge Detection Program</i>	44
3.2 – <i>Illicit Discharge Elimination</i>	48
3.3 – <i>MS4 Interconnection</i>	49
Minimum Control Measure 4 – Construction Site Stormwater Runoff	51
4.1 – <i>Management of Construction Site Stormwater Runoff</i>	51

Minimum Control Measure 5 – Post-Construction Stormwater Management	56
5.1 – Stormwater Management Facilities	56
Minimum Control Measure 6 – Pollution Prevention/Good Housekeeping	60
6.1 – Municipal Facility Pollution Prevention and Good Housekeeping	60
6.2 – Landscaping Management and Pest Control	63
6.3 – Personnel Training	65
6.4 - Management of Municipal Facilities	67
Appendix B – Virginia Tech Annual Standards and Specifications for ESC & SWM	70
Appendix C – Illicit Discharge Annual Report Summary	71
Appendix D – Stormwater Management Facilities	72
Appendix E – Annual Report Active Project List	73
Appendix F – Training Table	74
Appendix G – Program Evaluations	75
Appendix H – Documentation of Public Participation Activities	76

SID ORGANIZATIONAL STRUCTURE

Site & Infrastructure Development Department

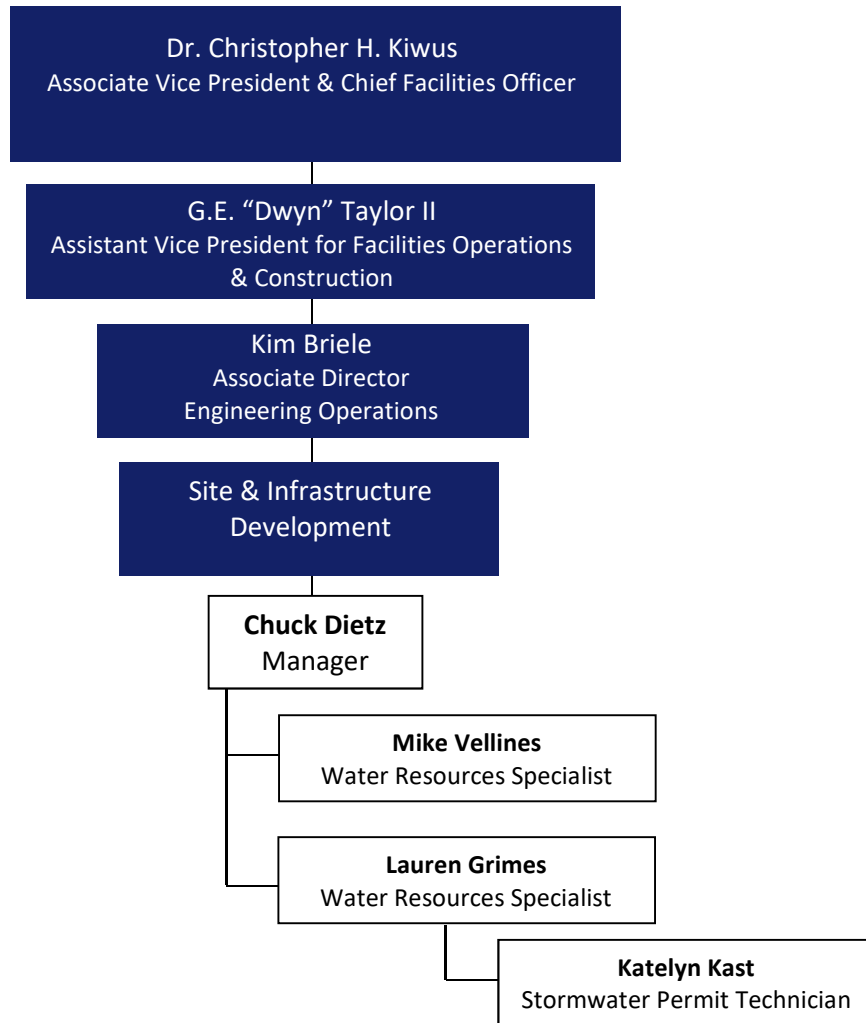

RESPONSIBLE PARTY CONTACT INFORMATION

During the 2013-2018 MS4 Permit Cycle, Virginia Tech will finalize its list of responsible parties and associated contact information. The updated responsible party and contact information list will be added to the MS4 Program Plan.

MS4 OVERVIEW

Introduction

This document serves as the Registration Statement for Virginia Tech per **9VAC25-890-40** General Permit for Discharges of Stormwater from Small MS4s. The Registration Statement serves as an overview of Virginia Tech's MS4 Program Plan for the duration of the 2013-2018 permit cycle. Any revisions to this plan will be justified in writing and submitted to DEQ for review. The document follows the sequencing established in the permit. Any italicized content refers to language taken directly from the permit. **Appendix A** of this document has been updated to reflect the accomplishments of the Virginia Tech Stormwater Management Program and acts as the annual report submission for each year of the 2013-2018 permit cycle.

General Registration Statement Information

Information pertaining to 9VAC25-890-30 B 1-6:

- **Name:** Virginia Polytechnic Institute and State University (Virginia Tech)
- **Type:** University
- **Address:** Virginia Tech – Sterrett Facilities Complex, 230 Sterrett Drive (0529), Blacksburg, VA 24061
- **HUCs currently receiving discharge:**
 - NE59 – New River Stroubles Creek
 - *IMPAIRED:* Stroubles Creek (Benthic) Pollutant – Sediment
- **Estimated Drainage Area discharging to any impaired surface waters:**
 - See Description of Drainage Area below for more information.
- **Physically Interconnected MS4s:**
 - Town of Blacksburg – VAR040019
 - Virginia Department of Transportation (VDOT) – VAR040016

9VAC25-890-30 B 9 *A list of all existing signed agreements between the operator and any applicable third parties where the operator has entered into an agreement in order to implement minimum control measures:*

- There are no signed agreements between the operator and any third parties in order to implement minimum control measures or portions of minimum control measures. Should this change, all necessary information will be added to the Virginia Tech MS4 Program Plan and future annual reports.

9VAC25-890-30 B 10 *The name, address, telephone number and email address of either the principal executive officer or ranking elected official as defined in 9VAC25-870-370:*

Principle Executive Officer:

Title: Associate Vice President and Chief Facilities Officer

Name: Dr. Christopher H. Kiwus
230 Sterrett Drive
Blacksburg, VA 24061

Phone: (540) 231-6291

Email: chkiwus@vt.edu

9VAC25890-30 B 11 *The name, position title, address, telephone number, and email address of any duly authorized representative as defined in 9VAC25-870-370:*

- At this time, Virginia Tech does not have a duly authorized representative. If one is ever appointed, it will be reflected in the Virginia Tech MS4 Program Plan and future annual reports.

Description of Drainage Area

Virginia Polytechnic Institute and State University (Virginia Tech) is located in Blacksburg, Virginia with approximately 31,000 full time students and 14,000 faculty/staff. The main campus includes approximately 135 buildings and 2,600 acres. Virginia Tech is part of a watershed that drains to Stroubles Creek. The overall watershed is approximately 3,500 acres, and the main campus of Virginia Tech is approximately 2,600 acres. Stroubles Creek is a tributary of the New River (VAW-N22R, HUC 05050001). The headwaters of the creek originate in the northeastern part of the Town of Blacksburg, flowing in a generally southwesterly direction. Upper Stroubles Creek is formed from two main tributaries – Central Branch and Webb Branch – and receives flow from a number of other unnamed perennial streams. The two named tributaries flow into the Duck Pond on the Virginia Tech campus, with the main Lower Stroubles Creek channel beginning at the pond’s outfall. The Upper Stroubles Creek watershed contains a significant urban area including the Town of Blacksburg and a majority of the main campus of Virginia Tech.

PROGRAM OVERVIEW

Total Maximum Daily Load

Virginia Tech currently has one stormwater-related Waste Load Allocation (WLA) and is accountable for specific pollutant reductions. The WLA assigned to Virginia Tech is:

- **Stroubles Creek:** 210.88 tons/year sediment

9VAC25-890-40 Section I B 1 *Maintain an updated MS4 Program Plan that includes a specific TMDL Action Plan for pollutants allocated to the MS4 in approved TMDLs*

- Virginia Tech will be teaming up with other Stroubles Creek TMDL Implementation Plan (IP) stakeholders in the development of a TMDL Action Plan for Stroubles Creek. A progress report for the TMDL Action Plan will be provided in the Year 1 Annual Report submission and updates will be provided in each additional annual report (See *TMDL Year 1 Response*).

9VAC25-890-40 Section I B 2 *Special conditions for approved TMDLs other than the Chesapeake Bay TMDL:*

- a) *Develop and maintain a list of legal authorities such as ordinances, state and other permits, orders, specific contract language, and interjurisdictional agreements applicable to reducing the pollutant identified in each applicable WLA.*
- Virginia Tech has developed a preliminary list of legal authorities applicable to reducing the pollutant identified in the WLA for Stroubles Creek. The following list will be evaluated annually and updated as needed.
 - i. General Permit for Discharges of Stormwater from Municipal Separate Storm Sewer Systems (VAR04)
 - ii. Virginia Tech Annual Standards and Specifications for ESC and SWM
 - iii. General Permit for Discharges of Stormwater from Construction Activities (VAR10)
 - iv. Stormwater Management Policy (*under review*)
 - **Year 2 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required to be completed within 24 months of permit coverage. A copy of the completed TMDL Action will be submitted to DEQ with this Annual report and is available upon request.
 - **Year 3 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.
 - **Year 4 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.
- b) *Identify and maintain an updated list of all additional management practices, control techniques, and system design and engineering methods, beyond those identified in Section II B, that have been implemented as part of the MS4 Program Plan that are applicable to reducing the pollutant identified in the WLA.*
- Virginia will identify any additional practices, techniques, designs, and methods beyond those identified in Section II B that have been implemented and that are applicable to reducing the pollutant identified in the WLA for Stroubles Creek. Progress reports on this effort will be included in the appropriate annual reports.
 - **Year 2 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required to be completed within 24 months of permit coverage. A copy of the completed TMDL Action will be submitted to DEQ with this Annual report and is available upon request.
 - **Year 3 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.

- **Year 4 Response:** Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.
- c) Enhance the public education and outreach and employee training programs to also promote methods to eliminate and reduce discharges of the pollutants identified in the WLA.**
- Virginia Tech has enhanced the public education and outreach and employee training programs to promote methods to eliminate and reduce discharges of the pollutant identified in the WLA. Each year, in conjunction with the annual reports, Virginia Tech will evaluate this effort and determine if any modifications are needed. Evaluations will be included with each annual report.
 - **Year 1 Response:** Sediment is a high priority water quality issue, as outlined in MCM1. Please see the MCM1 Evaluation in **Appendix G**.
 - **Year 2 Response:** Sediment is a high priority water quality issue, as outlined in MCM1. Please see the MCM1 Evaluation in **Appendix G**.
 - **Year 3 Response:** Sediment is a high priority water quality issue, as outlined in MCM1. Please see the MCM1 Evaluation in **Appendix G**.
 - **Year 4 Response:** Sediment is a high priority water quality issue, as outlined in MCM1. Please see the MCM1 Evaluation in **Appendix G**.
- d) Assess all significant sources of pollutants from facilities owned or operated by the MS4 operator that are not covered under a separate VPDES permit and identify all municipal facilities that may be a significant source of the identified pollutant.**
- Facility pollutant identification will be incorporated into the high priority facility investigations that will be done in accordance with **9VAC25-890-40 Section II B 6 b**. Please see **Appendix A** for more information.
- e) Develop and implement methods to assess TMDL Action Plans for their effectiveness in reducing the pollutants identified in the WLA.**
- Methods to assess TMDL Action Plans will be considered during the development of any Action Plans that are required per **9VAC25-890-40 Section I B 1**. These methods will be addressed in the TMDL Action Plan and reported on in the appropriate annual reports.

9VAC25-890-40 Section I B 7 *Estimated end date for achieving the applicable WLA(s)*

- Any associated objectives and milestones for the WLA will be included in the TMDL Action Plan that will be developed within 24 months of permit coverage.

Annual Reporting Requirements

Per **9VAC25-890-40 Section I B 5**, each annual report shall include:

- Required TMDL Action Plan with appropriate annual report (Year 2).
- Report on the implementation of the TMDL Action Plans and associated evaluation including the results of any monitoring conducted as part of the evaluation.

Year 1 Response: A TMDL Implementation grant was awarded to Stroubles Creek stakeholders to aid in the advancement of goals and milestones in the current Stroubles Creek TMDL Implementation Plan. Throughout this process, the stakeholders have been assessing the progress of the goals and milestones specified in the current Stroubles Creek Implementation Plan. A scope of work and schedule have been developed to be implemented over the next 2 years. The assessment of progress will be utilized in the development of an action plan for Stroubles Creek.

Year 2 Response: Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required to be completed within 24 months of permit coverage. A copy of the completed TMDL Action will be submitted to DEQ with this Annual report and is available upon request.

Year 3 Response: Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.

Year 4 Response: Virginia Tech enlisted a consultant to help with the development of the TMDL Action Plan that is required by the MS4 Permit. A copy of the Action Plan was submitted with the Year 2 Annual Report and has since been approved by DEQ for implementation. Virginia Tech is currently in the data collection and evaluation stage of the Action Plan. Further information about the TMDL Action Plan is available upon request.

Minimum Control Measure 1 – Public Outreach and Education

For the 2013-2018 MS4 permit cycle, Virginia Tech has identified three initial target audiences and high priority water quality issues. These audiences and issues will be the focus of the Public Outreach and Education Program during the permit cycle. Please see Tables 1 and 2 for more information regarding Virginia Tech’s proposed target audiences and high priority water quality issues. Virginia Tech will strive to reach 20% of each target audience annually through a variety of mechanisms. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its public outreach and education efforts. Any observed weaknesses or shortcomings found during the evaluation will be appropriately addressed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

Table 1: Target Audiences

Target Audience	Population	Rationale
On-Campus Students	~ 10,000	On-campus students are likely to impact stormwater in their everyday interaction with the campus community. Their greatest areas of impact are trash management, including the disposal of batteries, electronics, trash, cigarette butts, and food waste.
Off-Campus Students	~ 20,000	Off-campus Students frequent campus due to classes, sporting events, and activities. As a result, they have a great potential to impact stormwater. Some areas of concern are trash management and animal waste.

Faculty/Staff	~ 14,000	Faculty/Staff are most likely long-term members of the campus community and as such can be crucial advocates for stormwater management. Many employees deal with operations which use chemicals and equipment that have the potential to impact stormwater. Others are in a position to teach the student population about stormwater pollution prevention and facilitate research opportunities.
----------------------	----------	---

Table 2: High Priority Water Quality Issues

High Priority Water Quality Issue	Rationale
Sediment	Increased urbanization and runoff from impervious surfaces has high potential to damage the benthic ecosystem in Stroubles creek.
Animal Waste	Animal waste has high potential to cause bacterial pollutants in the creek.
Trash	Trash is the most common pollutant from the University community and has high potential to enter the creek.

9VAC25-890-40 Section II B 1 f *The MS4 Program Plan shall describe how the conditions of this permit shall be updated in accordance with Table 1.*

During Year 1, Virginia Tech will develop a Public Outreach and Education Plan for the 2013-2018 MS4 permit cycle. This plan will discuss how the aforementioned target audiences and high priority water quality issues will be addressed during the permit cycle. Virginia Tech will strive to complete the Public Outreach and Education Plan by the summer of 2014 and will give a progress update in the Year 1 annual report submission. The final copy of the Public Outreach and Education Plan will be available in the Virginia Tech Site & Infrastructure Development office.

Year 1 Response: Virginia Tech has developed a Public Outreach and Education Plan for the 2013-2018 permit cycle. The plan discusses the rationale for the target audiences and high priority water quality issues as well as how they will be addressed during the permit cycle. A copy of the Public Outreach and Education Plan is available by request in the Site & Infrastructure Development office.

Year 2 Response: During Year 2, Virginia Tech reviewed the Public Outreach and Education Plan and the rationale for target audiences and high priority water quality issues for consistency. A copy of the Public Outreach and Education Plan is available by request in the Site & Infrastructure Development office.

Year 3 Response: During Year 3, Virginia Tech reviewed the Public Outreach and Education Plan and the rationale for target audiences and high priority water quality issues for consistency. A copy of the Public Outreach and Education Plan is available by request in the Site & Infrastructure Development office.

Year 4 Response: During Year 4, Virginia Tech reviewed the Public Outreach and Education Plan and the rationale for target audiences and high priority water quality issues for consistency. A copy of the Public Outreach and Education Plan is available by request in the Site & Infrastructure Development office.

Annual Reporting Requirements

Per 9VAC25-890-49 Section II B 1 g, each annual report shall include:

- *List of education and outreach activities conducted during the reporting period for each high priority water quality issue, the estimated number of people reached, and an estimated percentage of the target audience or audiences reached.*
- *List of education and outreach activities that will be conducted during the next reporting period for each high priority water quality issue, the estimated number of people that will be reached, and an estimated percentage of the target audience or audiences that will be reached.*
- **Year 1 Response:** See BMP 1.1 and 1.2 in **Appendix A** for further information.
- **Year 2 Response:** See BMP 1.1 and 1.2 in **Appendix A** for further information.
- **Year 3 Response:** See BMP 1.1 and 1.2 in **Appendix A** for further information.
- **Year 4 Response:** See BMP 1.1 and 1.2 in **Appendix A** for further information

Minimum Control Measure 2 – Public Involvement/Participation

During the 2013-2018 permit cycle, Virginia Tech’s MS4 Program Plan will be updated at least once a year in conjunction with annual reports. An updated MS4 Program Plan will be maintained on Virginia Tech’s stormwater website. Copies of each annual report will be posted on Virginia Tech’s stormwater website within 30 days of submittal and will remain online for the duration of the permit cycle. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its public outreach and education efforts. Any observed weaknesses or shortcomings found during the evaluation will be addressed and solutions will be proposed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

9VAC25-890-40 Section II B 2 a (2) – Public Involvement:

- Maintain an updated MS4 Program Plan on the Virginia Tech stormwater website.*
 - Virginia Tech will annually evaluate and update its MS4 Program Plan in conjunction with each annual report. The updated MS4 Program Plan will be maintained on Virginia Tech’s stormwater website.
- Post Copies of each annual report on the Virginia Tech stormwater website.*
 - A copy of each MS4 Annual Report will be posted on the Virginia Tech stormwater website within 30 days of submittal and will remain online for the duration of the MS4 permit cycle.
- Notify the public and provide for receipt of comment of the proposed MS4 Program Plan that will be submitted with the registration statement.*
 - Virginia Tech will post a copy of the proposed MS4 Program Plan on the Virginia Tech stormwater website. A campus notice will be sent out to the University community to notify them that the proposed plan is available online and open to public comment. The public comment period will last 2 weeks. Any comments received during the public comment period will be reviewed by SID and addressed in the appropriate annual report.
 - **Year 1 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
 - **Year 2 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
 - **Year 3 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
 - **Year 4 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.

9VAC25-890-40 Section II B 2 b – Public Participation *Participate, through promotion, sponsorship, or other involvement, in a minimum of four local activities annually.*

- Virginia Tech will satisfy this requirement through a variety of activities on campus and in surrounding communities. These activities will be addressed in the Public Participation written procedures described in **9VAC25-890-40 Section II B 2 c** (below).
- **Year 1 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
- **Year 2 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
- **Year 3 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.
- **Year 4 Response:** See BMP 2.1 and 2.2 in **Appendix A** for further information.

9VAC25-890-40 Section II B 2 c *The MS4 Program Plan shall include written procedures for implementing this program.*

- During Year 1, Virginia Tech will develop written procedures for the Public Involvement and Participation portion of the Virginia Tech MS4 Program. These will be created in conjunction with the development of the Public Education and Outreach Plan. A progress update will be given in the Year 1 Annual Report. The final copy of the Public Involvement/Participation written procedures will be added to the Virginia Tech MS4 Program Plan.

Year 1 Response: Virginia Tech has developed written procedures for the Public Involvement/Participation portion for the 2013-2018 Virginia Tech MS4 Program. A copy is available by request in the Site & Infrastructure Development office.

Year 2 Response: During Year 2, Virginia Tech reviewed the written procedures for the Public Involvement/Participation portion of the 2013-2018 Virginia Tech MS4 Program. A copy is available by request in the Site & Infrastructure Development office.

Year 3 Response: During Year 3, Virginia Tech reviewed the written procedures for the Public Involvement/Participation portion of the 2013-2018 Virginia Tech MS4 Program. A copy is available by request in the Site & Infrastructure Development office.

Year 4 Response: During Year 4, Virginia Tech reviewed the written procedures for the Public Involvement/Participation portion of the 2013-2018 Virginia Tech MS4 Program. A copy is available by request in the Site & Infrastructure Development office.

Annual Reporting Requirements

Per **9VAC25-890-40 Section II B 2 d**, each MS4 Annual Report shall include:

- *A web link to the MS4 Program Plan and annual report.*
- *Documentation of compliance with the public participation requirements of this section.*

Year 1 Response: See BMP 2.1 and 2.2 in **Appendix A** for further information.

Year 2 Response: See BMP 2.1 and 2.2 in **Appendix A** for further information.

Year 3 Response: See BMP 2.1 and 2.2 in **Appendix A** for further information.

Year 4 Response: See BMP 2.1 and 2.2 in **Appendix A** for further information.

Minimum Control Measure 3 – Illicit Discharge Detection and Elimination (IDDE)

During the 2013-2018 MS4 permit cycle, Virginia Tech will update its current IDDE Program in order to meet the requirements stated in **9VAC25-890-40 Section II B 3**. In the interim, Virginia Tech will continue to implement its current IDDE Program until the program is updated to meet the conditions of the 2013-2018 MS4 Permit. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its IDDE public education efforts and response procedures. Any observed weaknesses or shortcomings found during the evaluation will be appropriately addressed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

9VAC25-890-40 Section II B 3 a *Maintain an accurate storm sewer system map and information table and shall update it in accordance with Table 1.*

- Virginia Tech will update its storm sewer system map to meet the requirements set forth in the 2013-2018 MS4 permit. A progress report will be given in each annual report. Storm sewer system mapping is available upon request in the Virginia Tech Site & Infrastructure Development office.
- **Year 1 Response:** Please see **Appendix A**, BMP 3.1.1 – Storm Sewer System Map (Inventory Outfall Locations) for a status update.
- **Year 2 Response:** Please see **Appendix A**, BMP 3.1.1 – Storm Sewer System Map (Inventory Outfall Locations) for a status update.
- **Year 3 Response:** Please see **Appendix A**, BMP 3.1.1 – Storm Sewer System Map (Inventory Outfall Locations) for a status update.
- **Year 4 Response:** Please see **Appendix A**, BMP 3.1.1 – Storm Sewer System Map (Inventory Outfall Locations) for a status update.

9VAC25-890-40 Section II B 3 b *Effectively prohibit, through ordinance or other legal mechanism, non-stormwater discharges into the storm sewer system to the extent allowable under federal, state, or local law or regulation.*

- During the 2013-2018 MS4 permit cycle, Virginia Tech will evaluate its methods for prohibiting non-stormwater discharges for effectiveness. Once this evaluation is complete, Virginia Tech will set goals for modification and implementation. Progress updates for the evaluation and any necessary modifications will be given in future MS4 Annual Reports.
- **Year 1 Response:** Please see BMP 3.2.2 Prohibiting Illicit Discharges in Appendix A for a status update and the MCM3 Evaluation in **Appendix G**.
- **Year 2 Response:** Please see BMP 3.2.2 Prohibiting Illicit Discharges in Appendix A for a status update and the MCM3 Evaluation in **Appendix G**.
- **Year 3 Response:** Please see BMP 3.2.2 Prohibiting Illicit Discharges in Appendix A for a status update and the MCM3 Evaluation in **Appendix G**.
- **Year 4 Response:** Please see BMP 3.2.2 Prohibiting Illicit Discharges in Appendix A for a status update and the MCM3 Evaluation in **Appendix G**.

9VAC25-890-40 Section II B 3 c *Develop and implement written procedures to detect, identify, and address non-stormwater discharges, including illegal dumping, to the small MS4.*

- During Year 1, Virginia Tech will develop IDDE written procedures to be used during IDDE and Outfall Reconnaissance Inventory (ORI) investigations. These written procedures will satisfy the

requirements set forth in **9VAC25-890-40 Section II B 3 c**. Virginia Tech will strive to complete the written procedures by the summer of 2014 and will give a progress update in the Year 1 Annual Report submission. The final copy of the IDDE written procedures will be added to Virginia Tech's IDDE Program and will be available upon request in the Virginia Tech Site & Infrastructure Development office.

- **Year 1 Response:** Virginia Tech has developed written procedures that are utilized during IDDE and ORI Investigations. These procedures have been added to the Virginia Tech IDDE Program and are available upon request in the Virginia Tech Site & Infrastructure Development office.
- **Year 2 Response:** Virginia Tech has developed written procedures that are utilized during IDDE and ORI Investigations. These procedures are reviewed and maintained by the Site & Infrastructure Development office as a part of the Virginia Tech IDDE Program and are available upon request in the Virginia Tech Site & Infrastructure Development office.
- **Year 3 Response:** Virginia Tech has developed written procedures that are utilized during IDDE and ORI Investigations. These procedures are reviewed and maintained by the Site & Infrastructure Development office as a part of the Virginia Tech IDDE Program and are available upon request in the Virginia Tech Site & Infrastructure Development office.
- **Year 4 Response:** Virginia Tech has developed written procedures that are utilized during IDDE and ORI Investigations. These procedures are reviewed and maintained by the Site & Infrastructure Development office as a part of the Virginia Tech IDDE Program and are available upon request in the Virginia Tech Site & Infrastructure Development office.

9VAC25-890-40 Section II B 3 d *Promote, publicize, and facilitate public reporting of illicit discharges into or from MS4s.*

- Currently, Virginia Tech staff and students are able to report spills and illicit discharges on the Anonymous Safety Complaint interface of the Virginia Tech Environmental Health and Safety webpage: www.ehss.vt.edu/report_issue. During the 2013-2018 MS4 permit cycle, Virginia Tech will evaluate the process of reporting spills and illicit discharges to determine if any modifications are needed to satisfy the new IDDE Program requirements set forth in the 2013-2018 MS4 Permit. Progress updates for any necessary IDDE reporting modifications will be given in future MS4 Annual Reports.
- **Year 1 Response:** See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.
- **Year 2 Response:** See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.
- **Year 3 Response:** See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.
- **Year 4 Response:** See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.

Annual Reporting Requirements

Per **9VAC25-890-40 Section II B 3 f**, each annual report shall include:

- *A list of any written notifications of physical interconnection given by the operator to other MS4s.*
- *The total number of outfalls screened during the reporting period, the screening results, and detail of any follow-up necessary based on screening results.*
- *Summary of each investigation conducted by the operator of any suspected illicit discharge. Each summary will include the following:*
 - *Date that the suspect discharge was observed or reported or both*
 - *How the investigation was resolved, including any follow-up*
 - *Resolution of the investigation and the date the investigation was closed*

Year 1 Response: See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.

Year 2 Response: See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.

Year 3 Response: See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.

Year 4 Response: See BMP 3.1, 3.2, and 3.3 in **Appendix A** for further information.

Minimum Control Measure 4 – Construction Site Runoff Control

The Virginia Tech Annual Standards and Specifications for Erosion and Sediment Control (ESC) and Stormwater Management (SWM) are integral components of Virginia Tech’s design, construction, and maintenance of the University’s facilities and campuses. The Virginia Tech Annual Standards and Specifications for ESC and SWM are administered by Virginia Tech Site & Infrastructure Development and apply to all design, construction, and maintenance activities on property owned by Virginia Tech, either by its internal workforce or contracted to external entities, where such activities are regulated by the Virginia ESC Law and Regulations or the Virginia SWM Act and VSMP Regulations. The Virginia Tech Annual Standards and Specifications for ESC and SWM are submitted to the Virginia Department of Environmental Quality (DEQ) for review and approval on an annual basis. Virginia Tech shall ensure that project-specific plans are developed and implemented in accordance with the Virginia Tech Annual Standards and Specifications for ESC and SWM. Please see **Appendix B** for a copy of the current Virginia Tech Annual Standards and Specifications for ESC and SWM. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its construction site runoff control efforts. Any observed weaknesses or shortcomings found during the evaluation will be appropriately addressed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

9VAC25-890-40 Section II B 4 c (4) *Promote to the public a mechanism for receipt of public complaints regarding regulated land-disturbing activities and shall follow-up on any complaints regarding potential water quality and compliance issues. All public comments for the Virginia Tech MS4 program are directed to stormwater@vt.edu via a comment box on Virginia Tech’s stormwater website. All public complaints regarding regulated land-disturbing activities will also be directed to the comment box and its associated email address. Signs containing web address and email information for public complaints will be posted at construction sites.*

Year 1 Response: See BMP 4.1 in **Appendix A** for a status update.

Year 2 Response: See BMP 4.1 in **Appendix A** for a status update.

Year 3 Response: See BMP 4.1 in **Appendix A** for a status update.

Year 4 Response: See BMP 4.1 in **Appendix A** for a status update.

9VAC25-890-40 Section II B 4 e – MS4 Program Requirements for Construction Site Stormwater Runoff Control:

(1) *Description of the legal authorities utilized to ensure compliance with the minimum control measures in Section II related to construction site stormwater runoff control such as ordinances, permits, orders, specific contract language, and multijurisdictional agreements.*

- Virginia Tech currently utilizes the following to ensure compliance with Minimum Control Measure 4 – Construction Site Stormwater Runoff Control:
 - i. Virginia Tech Annual Standards and Specifications for ESC and SWM
 - ii. Virginia Tech MS4 Program
 - iii. General Permit for Discharges of Stormwater from Construction Activities (VAR10)
 - iv. Memorandums of Understanding (MOU): project-by-project basis

v. Memorandums of Agreement (MOA): project-by-project-basis

*This list will be updated on an as-needed basis. Projects outside of Virginia Tech's main campus may be subject to local ordinances.

(2) Written plan review procedures and all associated documents utilized in plan review

- During the 2013-2018 MS4 permit cycle, Virginia Tech will ensure that the established written plan review procedures are up-to-date. Progress updates on these procedures will be provided in future MS4 Annual Reports. Upon completion, the final plan review written procedures will be added to the MS4 Program Plan. Please see **Appendix B** for a copy of the current Virginia Tech Annual Standards and Specifications for ESC and SWM.

(3) Copy of current Virginia Tech Annual Standards and Specifications for ESC and SWM

- Please see **Appendix B** for a copy of the current Virginia Tech Annual Standards and Specifications for ESC and SWM.

(4) Written inspection procedures and all associated documents utilized in inspections including the inspection schedule.

- During the 2013-2018 MS4 permit cycle, Virginia Tech will evaluate its current written procedures for inspections in order to determine if any modifications are necessary. Progress updates will be given in future MS4 Annual Reports. The final version of the inspection written procedures and any necessary supporting documentation will be added to the Virginia Tech MS4 Program. Please see **Appendix B** for a copy of the current Virginia Tech Annual Standards and Specifications for ESC and SWM.

(5) Written procedures for compliance and enforcement, including a progressive compliance and enforcement strategy, where appropriate.

- Virginia Tech does not have regulatory enforcement capabilities – DEQ has this responsibility – therefore no written procedures will be developed for enforcement. Compliance procedures can be found in the Virginia Tech Annual Standards and Specifications for ESC and SWM. Please see **Appendix B** for more information.

(6) Roles and Responsibilities of each of the operator's departments, divisions, or subdivisions in implementing Minimum Control Measure 4 – Construction Site Stormwater Runoff Control.

- During the 2013-2018 MS4 permit cycle, Virginia Tech will compile a list of roles and responsibilities for Virginia Tech departments and divisions that are involved in the implementation of Minimum Control Measure 4 – Construction Site Stormwater Runoff Control. Progress updates for this effort will be given in future MS4 Annual Reports.

Year 1 Response: Virginia Tech Annual Standards and Specifications for ESC and SWM fulfill the roles and responsibilities requirement of the permit. Any changes to this document will be addressed in later annual reports. See BMP 4.1 in **Appendix A** for further information.

Year 2 Response: Virginia Tech Annual Standards and Specifications for ESC and SWM fulfill the roles and responsibilities requirement of the permit. Any changes to this document will be addressed in later annual reports. See BMP 4.1 in **Appendix A** for further information.

Year 3 Response: Virginia Tech Annual Standards and Specifications for ESC and SWM fulfill the roles and responsibilities requirement of the permit. Any changes to this document will be addressed in later annual reports. See BMP 4.1 in **Appendix A** for further information.

Year 4 Response: Virginia Tech Annual Standards and Specifications for ESC and SWM fulfill the roles and responsibilities requirement of the permit. Any changes to this document will be addressed in later annual reports. See BMP 4.1 in **Appendix A** for further information.

Annual Reporting Requirements

Per **9VAC25-890-40 Section II B 4 f**, each annual report shall include:

- *Total number of regulated land-disturbing activities (**Appendix E**)*
- *Total disturbed acres (**Appendix E**)*
- *Total number of inspections performed (**Appendix E**)*
- *A summary of the enforcement actions taken (**Appendix E**)*

Year 1 Response: See BMP 4.1 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 2 Response: See BMP 4.1 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 3 Response: See BMP 4.1 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 4 Response: See BMP 4.1 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Minimum Control Measure 5 – Post-Construction Stormwater Management

During the 2013-2018 MS4 permit cycle, Virginia Tech will update its current program for Post-Construction Stormwater Management in order to meet the requirements stated in **9VAC25-890-40 Section II B 5**. In the interim, Virginia Tech will continue to implement its current program until the program is updated to meet the conditions of the 2013-2018 MS4 Permit. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its public outreach and education efforts. Any observed weaknesses or shortcomings found during the evaluation will be appropriately addressed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

9VAC25-890-40 Section II B 5 d Update MS4 Program Plan, in accordance with Table 1, to include following for Stormwater Management Progressive Compliance Enforcement:

- (1)** *List of applicable legal authorities related to Post-Construction Stormwater Management in new development and development on prior developed lands*
- (2)** *Written policies and procedures utilized to ensure that stormwater management facilities are designed and installed in accordance with **Section II B 5 b***
- (3)** *Written inspection policies and procedures utilized in conducting inspections*
- (4)** *Written procedures for inspection and maintenance of operator-owned stormwater management facilities.*
- (5)** *Roles and responsibilities of each of the operator’s departments, divisions, or subdivisions in implementing Minimum Control Measure 5 – Post-Construction Stormwater Management.*

During Year 1, Virginia Tech will update its MS4 Program Plan to include the items from **9VAC25-890-40 Section II B 5 d** outlined above. A progress update will be given in the Year 1 Annual Report submission. The final procedures will be added to the MS4 Program Plan upon completion.

Year 1 Response: During Year 1, Virginia Tech reviewed MS4 Program components, and it was determined that the items from 9VAC25-890-40 Section II B 5 d are covered under the current Virginia Tech Annual Standards and Specifications for ESC and SWM as well as the current O&M Program for Virginia Tech Stormwater Management Facilities. These documents can be made available, upon request, at the Site & Infrastructure Development office.

Year 2 Response: Please see Year 1 response above, the referenced documents can be made available, upon request, at the Site & Infrastructure Development office.

Year 3 Response: Please see Year 1 response above, the referenced documents can be made available, upon request, at the Site & Infrastructure Development office.

Year 4 Response: Please see Year 1 response above, the referenced documents can be made available, upon request, at the Site & Infrastructure Development office.

9VAC25-890-40 Section II B 5 e *Maintain an updated electronic database of all known operator-owned stormwater management facilities that discharge into the MS4.*

- During Year 1, Virginia Tech will update its current stormwater management facilities electronic database to include all information required in **9VAC25-890-40 Section II B 5 e (1)-(9)**. An updated copy of this database will be provided with the Year 1 Annual Report submission. This electronic database will be updated annually and included in each Annual Report submission.
- **Year 1 Response:** See **Appendix D** for an updated list of all known operator-owned stormwater management facilities that discharge into the MS4.
- **Year 2 Response:** See **Appendix D** for an updated list of all known operator-owned stormwater management facilities that discharge into the MS4.
- **Year 3 Response:** See **Appendix D** for an updated list of all known operator-owned stormwater management facilities that discharge into the MS4.
- **Year 4 Response:** See **Appendix D** for an updated list of all known operator-owned stormwater management facilities that discharge into the MS4.

Annual Reporting Requirements

Each Annual Report will include:

- *Current list of Stormwater Management Facilities (Appendix D)*
- *Number of inspections performed (Appendix A)*
- *Number of enforcement actions taken to ensure long-term maintenance (Appendix A)*

Minimum Control Measure 6 – Pollution Prevention/Good Housekeeping

During the 2013-2018 MS4 permit cycle, Virginia Tech will update its current program for Pollution Prevention/Good Housekeeping in order to meet the requirements stated in **9VAC25-890-40 Section II B 6**. In the interim, Virginia Tech will continue to implement its current program until the program is updated to meet the conditions of the 2013-2018 MS4 Permit. At the end of each reporting year, Virginia Tech will evaluate the effectiveness of its public outreach and education efforts. Any observed weaknesses or shortcomings found during the evaluation will be addressed and solutions will be proposed. This evaluation will be included in each MS4 Annual Report. See **Appendix G**.

9VAC25-890-40 Section II B 6 a *Develop and implement daily operational procedures designed to minimize or prevent pollutant discharge from municipal operations.*

- During Years 1 and 2, Virginia Tech will develop written procedures designed to minimize or prevent pollutant discharge from daily operations, equipment maintenance, and the application, storage, transport, and disposal of pesticides, herbicides, and fertilizers. These written procedures will be utilized, as appropriate, as part of employee training. The status of written procedure development will be included in the Year 1 and Year 2 Annual Report submissions.
- **Year 1 Response:** Please see **Appendix A**, BMP 6.1.1 – Daily Good Housekeeping Procedures for a status update.
- **Year 2 Response:** Procedures have been developed and posted on the Virginia Tech website . Please see **Appendix A**, BMP 6.1.1 – Daily Good Housekeeping Procedures for more information.
- **Year 3 Response:** Procedures have been developed and posted on the Virginia Tech website . Please see **Appendix A**, BMP 6.1.1 – Daily Good Housekeeping Procedures for more information.
- **Year 4 Response:** Procedures have been developed and posted on the Virginia Tech website (Web address). Please see **Appendix A**, BMP 6.1.1 – Daily Good Housekeeping Procedures for more information.

9VAC25-890-40 Section II B 6 b *Municipal facility pollution prevention and good housekeeping.*

(1) *Identify all municipal high priority facilities within 12 months of permit coverage.*

- During Year 1, Virginia Tech will develop selection criteria to use in the identification of municipal high priority facilities. Once the selection criteria are developed, Virginia Tech will perform site inspections of facilities that have the potential to be high priority facilities.
- **Year 1 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 2 Response:** Facilities have been identified. Virginia Tech is currently exploring the options and process of creating SWPPPs for the identified facilities. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update
- **Year 3 Response:** Facilities have been identified. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update
- **Year 4 Response:** Facilities have been identified. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update

(2) *Identify which of the municipal high priority facilities have a high potential of chemicals or other materials to be discharged in stormwater.*

- During Year 1, once the high priority facilities are identified, Virginia Tech will determine which high priority facilities have a high potential to discharge chemicals or other materials into the storm sewer system. All high priority/high potential facilities will be required to have a Stormwater Pollution Prevention Plan (SWPPP). A list of all the high priority/high potential facilities will be provided in the Year 1 Annual Report submission.
- **Year 1 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 2 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 3 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 4 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.

(3) Develop and implement specific SWPPPs for all high priority facilities identified as having a high potential for the discharge of chemicals and other materials in stormwater.

- During Year 2, Virginia Tech will begin the process of developing SWPPPs for all the high priority/high potential facilities identified in Year 1. The progress of SWPPP development and implementation will be reported in each MS4 Annual Report submission. Virginia Tech will strive to have all necessary SWPPPs developed and implemented by June 30, 2018. A copy of each SWPPP will be kept at each facility and will be appropriately updated and utilized as part of staff training required in **Section II B 6 d**.
- **Year 1 Response:** Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 2 Response:** Facilities have been identified. Virginia Tech is currently exploring the options and process of creating SWPPPs for the identified facilities. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 3 Response:** Facilities have been identified. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.
- **Year 4 Response:** Facilities have been identified. Please see **Appendix A**, BMP 6.1.2 – High Priority Facilities for a status update.

Nutrient Management Plans

Currently, Virginia Tech has twenty-one Nutrient Management Plans (NMPs). For a list of Virginia Tech’s current NMPs, please see Table 3 (below).

Table 3: VT Nutrient Management Plans

Department	Area (Acres)	Issue Date	Expiration Date	Category	Contact Information
CALS Livestock Plan for Campus and Montgomery County Lands	1708.2	6/1/2016	9/1/2017	Agriculture	Dwight Paulette kentland@vt.edu
Virginia Tech Athletic Department	28.8	05/01/2016	05/01/2019	Turf & Landscape	Casey Underwood caunderw@vt.edu Emerson Pulliam emerson@vt.edu
Golf Course	33.0	1/1/2016	1/1/2021	Turf & Landscape	Jason Ratcliff jratclif@vt.edu

Virginia Tech Campus Grounds	51.61	11/30/2015	11/30/2018	Turf & Landscape	Steve Perfater spenfate@vt.edu
Hahn Horticulture Garden	6.3	8/2/2015	8/1/2018	Turf & Landscape	Paul Chumbley vtgarden@vt.edu
Virginia Tech Recreational Sports	27	-	-	Turf & Landscape	Coty Skaggs coty36@vt.edu
Turfgrass Research Center	20	03/02/2016	03/1/2019	Turf & Landscape	Dr. Erik Ervin ervin@vt.edu
Northern Piedmont AREC	11	9/2/2015	9/1/2018	Turf & Landscape	Steve Gulick sgulick@vt.edu
Urban Horticulture Center	15	4/2/2016	4/1/2019	Turf & Landscape	John James jojames@vt.edu
Kentland Managed Lands	204.9	4/16/2016	4/15/2019	Turf & Landscape	Jon Wooge jwooge@vt.edu
Glade Road Research Center	6.3	4/21/2016	4/20/2019	Turf & Landscape	Dr. Shawn Askew saskew@vt.edu
Alson H. Smith, Jr AREC - Winchester	47	12/02/2015	12/01/2018	Turf & Landscape	Dr. Tony Wolf vitis@vt.edu
Eastern Shore AREC	117.9	3/16/2016	3/15/2019	Turf & Landscape	Steven Rideout srideout@vt.edu
Eastern Virginia AREC	201.8	9/18/2015	9/10/2018	Turf & Landscape	Robert Pitman rpitman@vt.edu
Hampton Roads AREC	15	7/2/2015	7/1/2018	Turf & Landscape	Dr. Pete Shultz schultzp@vt.edu
Middleburg AREC	296	7/10/2015	7/09/2018	Turf & Landscape	MAREC@vt.edu
Reynolds Homestead AREC	5.5	12/2/2015	12/01/2018	Turf & Landscape	Dr. Kyle Peer krpeer@vt.edu
Shenandoah Valley AREC	601.1	1/27/2016	2/01/2019	Agriculture	David Fiske dafiske@vt.edu
Southern Piedmont AREC	300.6	3/14/2016	3/15/2019	Agriculture	Dr. Carl Wilkinson wilki@vt.edu
Southwest AREC	98.1	1/27/2016	1/14/2019	Agriculture	Lee Wright lrite@vt.edu
Tidewater AREC	231.9	12/02/2015	12/01/2018	Agriculture	David Langston dlangston@vt.edu

9VAC25-890-40 Section II B 6 c (1) *Implement Nutrient Management plans that have been developed by a certified nutrient management planner on all lands owned or operated by Virginia Tech where nutrients are applied to a contiguous area greater than one acre.*

- a)** *Identify all applicable lands where nutrients are applied to a contiguous area of more than one acre within 12 months of permit coverage.*
- During Year 1, Virginia Tech will determine if any additional lands will require NMPs and/or if any of the current turf and landscape NMPs need to be updated. A final list of turf and landscape NMPs will be provided in the Year 1 annual report submission. A latitude and longitude for each piece of land will be included in the final list.
 - **Year 1 Response:** Virginia Tech determined that no additional lands require a nutrient management plan. Please see Table 3 (above) for a current list of Virginia Tech's nutrient management plans.

- **Year 2 Response:** Please see year 1 Response above, copies of current Virginia Tech nutrient management plans are available upon request.
- **Year 3 Response:** Copies of current Virginia Tech Nutrient Management Plans are available upon request.
- **Year 4 Response:** Copies of current Virginia Tech Nutrient Management Plans are available upon request.

b) Implement turf and landscape NMPs on all lands where nutrients are applied to contiguous area of more than one acre, within 60 months of permit coverage.

- If it is determined that additional turf and landscape NMPs need to be developed and/or any existing NMPs need to be modified, Virginia Tech will begin the process during Year 2. Progress updates regarding NMP modification and development will be given in each MS4 Annual Report submission. Virginia Tech will strive to have all necessary NMPs Developed and implemented by June 30, 2018.
- **Year 1 Response:** Virginia Tech determined that no additional lands require a nutrient management plan. Please see Table 3 (above) for a current list of Virginia Tech's nutrient management plans.
- **Year 2 Response:** Please see year 1 Response above, copies of current Virginia Tech nutrient management plans are available upon request.
- **Year 3 Response:** Copies of current Virginia Tech Nutrient Management Plans are available upon request.
- **Year 4 Response:** Copies of current Virginia Tech Nutrient Management Plans are available upon request.

9VAC25-890-40 Section II B 6 d Conduct training for employees and develop an annual written training plan including a schedule of training events that ensures implementation of the training requirements.

- During Year 1, Virginia Tech will develop an Annual Training Plan which will outline training schedules and implementation of training requirements. The Annual Training Plan will be added to the MS4 Program and updated annually.
- **Year 1 Response:** An Annual Written Training Plan was completed during Year 1 and outlines the training components that will be accomplished each year. A copy of the training plan is available in the Site & Infrastructure Development office upon request. See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update.
- **Year 2 Response:** The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. A copy of the training plan is available in the Site & Infrastructure Development office upon request. See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update.
- **Year 3 Response:** The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. A copy of the training plan is available in the Site & Infrastructure Development office upon request. See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update.
- **Year 4 Response:** The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. A copy of the training plan is available in the Site & Infrastructure Development office upon request. See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update.

Annual Reporting Requirements

Per 9VAC25-890-40 Section II B 6 g, each annual report shall include the following:

- *A summary report on the development and implementation of the daily operational procedures*
- *A summary report on the development and implementation of the required SWPPPs*
- *A summary report on the development and implementation of the nutrient management plans that includes:*
 - *The total acreage of lands where nutrient management plans are required*
 - *The total acreage of lands upon which nutrient management plans have been implemented*
- *A summary report on the required training, including a list of training events, the training date, the number of employees attending training and the objective of the training.*

Year 1 Response: See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 2 Response: See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 3 Response: See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Year 4 Response: See BMP 6.1, 6.2, and 6.3 in **Appendix A** for a status update of the aforementioned annual reporting requirements.

Appendix A – Summary of BMPs & Measurable Goals

MINIMUM CONTROL MEASURE 1 – PUBLIC OUTREACH & EDUCATION

Table 1: Public Education Outreach Plan

Program Update Requirement:	Permit Reference:	Update Completed By:
Public Education Outreach Plan	Section II B 1	12 months after permit coverage

*Updates will be submitted with the appropriate annual report.

1.1–Public Outreach Events for Target Audiences (Virginia Tech Students & Staff)

1.1.1 – Academic, Campus, and Community Events

Program Description: Educate the University about stormwater issues and pollution prevention techniques by participating in campus-sponsored events.

Measurable Goals: Participate in a total of 3 campus, community, or academic public outreach events each year. Track the number of outreach materials distributed at each event. Estimate the number of people from each target audience reached. TMDL- specific information will be incorporated into all public outreach events.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Public Outreach and Education Procedure

Year 1 Response: Site & Infrastructure Development (SID) staff assisted in coordinating and implementing the **Recycling Olympics** on March 19, 2014 to promote recycling, waste elimination, and proper waste disposal on the Virginia Tech campus. 42 on-campus students and 4 staff members participated in this event. The high priority water quality issue addressed through this outreach event was trash. SID promoted the Office of Energy and Sustainability’s **America Recycles Day Green Tailgate** on November 14, 2013 through advertisements on Facebook and Twitter. Over 50 (off-campus and on-campus) students and 3 faculty members participated in this event which paralleled with our tailgate signage efforts encouraging proper disposal of waste during football season. The high priority water quality issue addressed through this outreach event was also trash. SID also promoted the Virginia Tech Alternative Transportation **Cycle Chic** event on April 23, 2014. Over 30 off-campus commuter students and 6 staff members participated in the event, including members of the Virginia Tech Police Department. The event included bike tune-ups and information on the benefits of alternative transportation. No stormwater-specific outreach material was distributed as a part of this event, but all events incorporated outreach components that included important pollution prevention practices. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, hosted a stormwater display at **Sustainability Week** on September 18, 2013.

Representatives distributed pollution prevention information and were available for questions/concerns regarding local waterways. Approximately 10 off-campus students and 5 Virginia Tech employees visited the booth during the event. Children and their parents were able to enjoy Enviroscape demonstrations as well as the aquatic insect display (highlighting the core benthic impairment issue with the Stroubles Creek TMDL). More face-to-face interactions took place at this event than material distribution. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment. Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, hosted a stormwater display at **Steppin' Out 2013**. A 'kids table' included an aquatic insect display, a Virginia Tech weather station informational video, coloring activities, and goodie bags with activity books and bookmarks. The adult table included a watershed map, basic water quality testing equipment, and information about lawn maintenance and pet waste. A rain barrel was also on display. Again, representatives were available to address any questions/concerns from community members. Approximately 60% of all materials provided were distributed during the event. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment. For the first time, Site & Infrastructure Development took advantage of a program in Housing and Residence Life that allows printed materials to be distributed to each dormitory bed in order to provide pertinent information to new and returning students. An informational **residential dormitory packet** included a flier and a business card outlining illicit discharge indicators and information on how to report an illicit discharge. The materials were distributed to 9,026 beds for all on-campus students. This effort reached 100% of the on-campus student target audience. Next steps include developing innovative outreach material that is *not* paper-based to encourage continued use (magnets, dog leash poop bag holders, keychains, etc.). The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

A Virginia Tech Site & Infrastructure Development (SID) employee and two Town of Blacksburg employees presented in Travis Williams' **Environmental Justice course** March 20, 2014. Of the three total presentations, the local MS4 Programs, local flooding issues, and local water quality sampling were all addressed. Approximately 30 students were present in the classroom, along with one professor. The manager of SID participated in a field outing with Erich Hester's **Water Resources Engineering course** on March 26, 2014 which included a tour of an on-campus enhanced extended detention pond, an explanation of the project's plan sets and relevant stormwater design information. Approximately 30 students were present in the class, along with one professor. A Virginia Tech SID employee presented in Leigh Anne Krometis' **Land and Water Resources Engineering II course** on April 7, 2014 highlighting the campus storm sewer system and the Virginia Tech MS4 Program. Approximately 30 students and one professor were present in the class. Since all courses were upperclassmen level, all students most likely lived off-campus. New River Valley Watershed stickers and illicit discharge business cards were distributed to those interested, but material distribution numbers were not collected. The high priority water quality issues addressed through all three of these academic outreach events were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, hosted a stormwater display at **Gobbler Fest** on September 5, 2014. Representatives distributed pollution prevention information and were available for

questions/concerns regarding local waterways and stormwater control. Approximately 83 magnets and 103 stickers promoting awareness were distributed through the display. Items given out also included approximately 6 cigarette butt holders and 3 Illicit Discharge Detection business cards. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment. Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, also hosted a stormwater display at **Steppin' Out** on August 7-8, 2014. A 'kids table' included an aquatic insect display, coloring activities, and goodie bags with activity books and bookmarks. The table also included a watershed map, basic water quality testing equipment, and information about lawn maintenance and pet waste. A rain barrel was also on display. Again, representatives were available to address any questions/concerns from community members. Approximately 150 public outreach materials were distributed during the event. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment. Site & Infrastructure Development also took advantage of a program in Housing and Residence Life that allows materials to be distributed to each dormitory bed to provide pertinent information to new and returning students on campus. Magnets were distributed through these **residential dormitory packets** to 9,026 beds for all on-campus students. This effort reached 100% of the on-campus student target audience. Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, hosted a stormwater display at **Sustainability Week** on September 16, 2014. Representatives distributed pollution prevention information and were available for questions/concerns regarding local waterways. More face-to-face interactions took place at this event than material distribution. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment.

A Virginia Tech Site & Infrastructure Development (SID) employee presented in a **Hydraulics Structures** course on March 2, 2015. Approximately 13 students were present in the classroom, along with one professor. The presentation included the discussion of SWM facility design, and looked at the different parts of facilities and different hydrology methods that could be used. Another presentation was given in an **Introduction to Environmental Policy and Planning** course on April 15, 2015 by Chuck Dietz the Stormwater Compliance Manager. The presentation included information on stormwater control and aspects managed through Virginia Tech Site & Infrastructure Development (SID) and was given to approximately 24 undergraduate students. A third presentation was again delivered by Chuck Dietz in a **Non-Point Source Assessment and Control** Course course on May 4, 2015. This specific presentation focused on stormwater control and approximately 10 students were present in the classroom along with

On April 3, 2015 Facilities participated in a play at an event called **First Friday**. This play gave facilities the opportunity to educate the rest of the Administrative Services Division about the role of facilities in the University. The play targeted faculty and staff and informed them of Facilities' role in campus projects and the stormwater management projects they take part in. Approximately 72 faculty and staff members were present for this play.

On March 18, 2015 Site & Infrastructure Development gave a presentation to faculty and staff at an event called **3rd Wednesday** that is put on every month by the Facilities department to update the university community on the latest events and projects. The presentation included information about Virginia Tech's Stormwater Management Program and pollution prevention practices. Approximately 75 faculty/staff members were in attendance

Year 3 Response:

Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, also hosted a stormwater display at **Steppin' Out** on August 7-8, 2015. A 'kids table' included an aquatic insect display, coloring activities, and goodie bags with activity books and bookmarks. The table also included a watershed map, basic water quality testing equipment, and information about lawn maintenance and pet waste. Representatives from the Town of Blacksburg and Virginia Tech were available to address any questions/concerns from community members. Approximately 184 public outreach materials were distributed during the event. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment.

Sustainability Week is held by Virginia Tech and the Town of Blacksburg to promote creating a more sustainable community. Virginia Tech Site & Infrastructure Development participated by distributing approximately 50 pamphlets and handouts promoting local stormwater issues. The high priority water quality issues addressed through this outreach event were trash, pet waste, and sediment.

Magnets designed by Virginia Tech Site & Infrastructure Development were also distributed at an **American Society of Agricultural and Biological Engineers (ASABE) Conference** held April 1st through the 3rd. Approximately 140 students received these informational magnets and learned about on-campus stormwater management programs and listened to a lecture about a stream lab monitored by the Virginia Tech Sustainability Office.

Site & Infrastructure Development also took advantage of a program in Housing and Residence Life that allows materials to be distributed to each dormitory bed to provide pertinent information to new and returning students on campus. Magnets promoting the protection of Stroubles Creek were distributed through these **residential dormitory packets** to all on-campus students. This effort reached 100% of the on-campus student target audience.

A Virginia Tech Site & Infrastructure Development (SID) employee presented in a **Hydraulics Structures** course on March, 1 2016. The individuals present for this class included 2 on-campus students, 22 off-campus students and 1 Virginia Tech Faculty/Staff member. The presentation included the discussion of stormwater management facilities, including their different parts and the hydrology methods that could be used for design. A second presentation was given to a **Non-Point Source Assessment and Control** Course on April 27, 2016. The students in attendance included 13 that live off campus and 2 that live on campus. This lecture covered the Municipal Storm Sewer System and how it works and operates on Virginia Tech's campus. A third presentation that included an on-campus tour was given to an Environmental Economics Course on April 29, 2016. The audience included 18 off-campus students, 1 on-campus student and 1 member of Virginia Tech's faculty/staff. The discussion and tour covered the cost of inspections and maintenance of several best management practices located on campus.

Handouts designed by Virginia Tech Site & Infrastructure Development were distributed at an **on-campus picnic** geared towards Virginia Tech Graduate students. The target audience for these handouts included off-campus students. The high priority water quality issues addressed through these handouts were trash and pet waste.

Twice during the reporting year Virginia Tech Site & Infrastructure was able to educate faculty and staff through the **Facilities Newsletter**. In August stormwater facts were presented to educate employees that work in the facilities department. A write-up about the Stormwater BMP Inspector Training was also featured in the Facilities Newsletter.

Virginia Tech Site & Infrastructure Development hosted a **Stormwater BMP Inspection training** on July 22, 2015. This training was meant to teach DEQ employees and stormwater related individuals how to perform inspections of different types of stormwater management facilities. Thirty-one individuals were involved, including some DEQ staff and some Virginia Tech faculty/staff. SID was given the opportunity to present an overview of the current BMP maintenance program, and then several field inspections around campus were conducted throughout the remainder of the day.

Year 4 Response:

Virginia Tech, in conjunction with the stormwater management employees at the Town of Blacksburg, hosted a stormwater display at **Steppin' Out** on August 4-5, 2016. The tables at the booth included a multitude of handouts, watershed maps, and educational information about lawn maintenance and pet waste. Representatives were available to address any questions/concerns from community members. Based upon the numbers of items handed out, approximately 75 different individuals were reached during this event. The priority water quality issues addressed through this outreach event were trash, pet waste, and sediment.

Site & Infrastructure Development also took advantage of a program in Housing and Residence Life that allows materials to be distributed to each dormitory bed to provide pertinent information to new and returning students on campus. Magnets promoting the protection of Stroubles Creek were distributed through these **residential dormitory packets** to all on-campus students at the beginning of the 2016 school year. This effort reached 100% of the on-campus student target audience.

A Virginia Tech Site & Infrastructure Development (SID) employee presented in the BSE 4224 Course on September 1, 2016. The individuals present for this class included 18 off-campus students and 1 Virginia Tech Faculty/Staff Member. The presentation included site visits to various stormwater management facilities around campus.

Virginia Tech Site & Infrastructure Development hosted an **Illicit Discharge Detection and Elimination (IDDE) Workshop** on November 10, 2016. This training was meant to teach regional MS4 Representatives and local consultants about developing and implementing IDDE Programs for MS4s. SID was given the opportunity to present an overview of the Virginia Tech IDDE Program and then several field visits around campus were conducted throughout the remainder of the day.

A Virginia Tech Site & Infrastructure Development (SID) employee presented in a **Hydraulic Structures** course on February, 23 2017. The individuals present for this class included 29 off-campus students and 1 Virginia Tech Faculty/Staff member. The presentation included the discussion of stormwater management facilities, including their different parts and hydrology methods that could be used. On top of the presentation, this class specifically went out in the field and looked at the Alumni Pond BMP located on the Virginia Tech campus. A second presentation was given to a **Green Engineering** class on March 17, 2017. The students in

attendance included 14 students that live on campus and 52 students that live off campus. This lecture covered the Municipal Storm Sewer System (MS4) and how it works and operates on Virginia Tech's campus. A third presentation that included an on campus tour was given to a **Non-Point Source Assessment and Control** class on April 3, 2017. The audience included 14 off-campus students and 1 member of Virginia Tech's faculty/staff. The discussion and tour covered the responsibilities and duties of VTSID, how the stormwater management program is implemented on the Virginia Tech campus, and an overview of inspections and maintenance of several stormwater management facilities located on campus.

Members of Virginia Tech SID staff participated in an educational booth at a **New River Valley Home Show** in Christiansburg Virginia on March 10-12, 2017. Through communicating with residents, providing education pamphlets and performing demonstrations for children, approximately 100 different individuals were reached. This event targeted pet waste, sediment and trash along with many other home related stormwater issues.

A Virginia Tech Site & Infrastructure Development (SID) employee taught a station at an event for sixth graders on April 12, 2017. The topic at the station included education on stormwater runoff and watershed conservation using a hands on Enviroscope model. The audience included 240 sixth grade students and 28 teachers and volunteers from local middle schools.

Virginia Tech hosted the **DEQ Continuing Education Course** entitled "Applied Soils for ESC and SW Professionals" on April 19, 2017. Forty individuals from local jurisdictions, including Virginia Tech staff, attended this training.

Virginia Tech hosted the **DEQ Continuing Education Course** entitled "Where the Water Goes" on April 20, 2017. Forty individuals from local jurisdictions, including Virginia Tech staff, attended this training.

A Virginia Tech Site & Infrastructure Development (SID) employee participated in the first annual **Girls Day** sponsored by the Virginia Tech Facilities Department on June 7, 2017. The topics covered in the presentation included water quality, watershed conservation and sustainability. The audience included approximately 80 eighth grade students, 10 teachers and 10 of Virginia Tech's faculty/staff members.

A Virginia Tech Site & Infrastructure Development (SID) employee led 10 **Master Gardener** members around the Virginia Tech campus on June 22, 2017. The topics covered included discussing Site and Infrastructure's role on campus while visiting several different types of green infrastructure. The audience included two members of Virginia Tech's faculty/staff and eight individuals from different regions of the state.

1.2 – Targeting Public Outreach Mediums for Target Audiences

1.2.1 – Electronic Outreach

Program Description: Provide the University community with electronic outreach mediums to access information regarding stormwater management and methods to improve local watershed health (i.e., Facebook, stormwater website, Twitter, Tumblr, blogs, etc.).

Measurable Goals: Post at least 5 stormwater-related facts each year via electronic outreach. Track the number of viewers and record the estimated number reached from each target audience. Track comments that SID receives from social media sources.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Public Outreach and Education Procedure

Year 1 Response: Virginia Tech Site & Infrastructure Development (SID) maintains a “Virginia Tech Stormwater” Facebook page (facebook.com/hokiestormwater), a Twitter feed (@VTstormwater), and a departmental website. On the Facebook page during this annual reporting year, two posts received over 140 organic views and the overall site had 142 “likes” (88 more than last year). The SID webpage received 9,865 page views this reporting year and the Twitter page has 101 followers. It was not feasible to determine the target audience reached from the 9,865 website views. No Twitter followers are students at Virginia Tech. Approximately 46 of the Facebook likes are off-campus students. Many ‘likes’ and ‘followers’ are student organizations or other Virginia Tech departments as well as other stormwater entities. The high priority water quality issues addressed through these electronic outreach mediums were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Virginia Tech Site & Infrastructure Development (SID) maintains a “Virginia Tech Stormwater” Facebook page (facebook.com/hokiestormwater), a Twitter feed (@VTstormwater), and a departmental website. On the Facebook page during this annual reporting year, posts received over 70 organic views and the overall site had 182 “likes” (40 more than last year). The SID webpage received 658 page views this reporting year and the Twitter page has 131 followers (30 more than last year). It was not feasible to determine the target audience reached from the 9,865 website views. No Twitter followers are students at Virginia Tech. Approximately 60 of the Facebook likes are off-campus students. Many ‘likes’ and ‘followers’ are student organizations or other Virginia Tech departments as well as other stormwater entities. The high priority water quality issues addressed through these electronic outreach mediums were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Virginia Tech Site & Infrastructure Development (SID) maintains a “Virginia Tech Stormwater” Facebook page (facebook.com/hokiestormwater), a Twitter feed (@VTstormwater), and a departmental website. The Facebook page currently has 208 “likes” and through the posts within the reporting year an average of 69 individuals were reached. The SID webpage was viewed by 353 users this reporting year, and the Twitter page has 141 followers. Approximately 60 of the Facebook likes are off-campus students. Many ‘likes’ and ‘followers’ are student organizations or other Virginia Tech departments as well as other stormwater entities. The high priority water quality issues addressed through these electronic outreach mediums were trash, pet waste, and sediment.

Year 4 Response: Virginia Tech Site & Infrastructure Development (SID) maintains a “Virginia Tech Stormwater” Facebook page (facebook.com/hokiestormwater), a Twitter feed (@VTstormwater), and a departmental website. The Facebook page currently has 217 followers and through the posts within the reporting year an average of 80 individuals were reached. The SID webpage received 552 page views this reporting year and the Twitter page has 141 followers. The high priority water quality issues addressed through these electronic outreach mediums were trash, pet waste, and sediment.

1.2.2 – Other Outreach Materials

Program Description: Provide the University community with outreach materials to access information regarding local water pollution concerns (i.e., PSAs, pamphlets, table cards, signage, public advertisements).

Measurable Goals: Produce at least 2 printed outreach materials each year such as those listed in the *Program Description*. Record number of methods utilized each year. Record the estimated number reached for each target audience.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Public Outreach and Education Procedure

Year 1 Response: Approximately 2,538 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls in October. Each table card remained for a total of one week before it was removed. According to the average daily headcount in each dining hall, 3,901 students enter these dining halls each day and 20,026 on and off-campus students held dining plans last year. The high priority water quality issues addressed through this outreach medium were sediment and trash. **Tailgating signs** encouraging pollution prevention to protect local waterways were posted alongside both sides of the creek where cars gather for pre- and post-game tailgating. The signs were posted for five of the six home games. On average, 61,671 persons attended each of the six home games when the signage was posted. According to the following [source](#), on average, 25.67% of those in the stadium are students. For the sake of fairness, half are most likely on-campus students while half are off-campus. The high priority water quality issue addressed through this outreach medium was trash. The signage was a parallel effort alongside the Office of Energy and Sustainability’s ‘America Recycles Green Tailgating’ event on November 14, 2013. Two advertisements are on rotation at **The Lyric Theatre** in downtown Blacksburg, VA. These two stormwater-specific advertisements are each aired three times during the 30-minute preview during all showings. There are approximately two movie showings per day. On average, 35-45,000 people go to The Lyric each year. The high priority water quality issues addressed through this outreach medium were trash and pet waste. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Approximately 2000 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls during Year 2. Each table card remained for a total of one week before it was removed. The average daily headcount in each dining hall ranges from

approximately 1,000-6,600 customers each day. There were approximately 18,500 dining plan holders during the 2014-2105 academic year. The high priority water quality issues addressed through this outreach medium were sediment and trash. **Tailgating signs** encouraging pollution prevention to protect local waterways were posted alongside both sides of Stroubles Creek where cars gather for pre- and post-game tailgating. The signs were posted for five of the six home games. On average, 66,223 persons attended each of the home games when the signage was posted. According to the following [source](#), on average, 25% of those in the stadium are students. The high priority water quality issue addressed through this outreach medium was trash.

Year 3 Response: Table cards designed by Site & Infrastructure Development were placed throughout dining halls on campus during the 2015-2016 school year. Approximately 1,395 table cards were placed across 5 different dining halls which reach on and off campus students. These table cards provide educational information on ways to reduce pollution to local waterways and spread the word on ways to get involved with the local stormwater programs. The high priority water quality issues addressed through this outreach medium were sediment and trash.

Year 4 Response: Table cards designed by Site & Infrastructure Development were placed throughout dining halls on campus during the 2016-2017 school year. Approximately 1,680 table cards were placed across 6 different dining halls which reach on and off campus students. These table cards provide educational information on ways to reduce pollution to local waterways and spread the word on ways to get involved with the local stormwater program.

1.2.3 – TMDL-Specific Outreach Materials

Program Description: Provide the University community with outreach mediums to access information regarding local water pollution concerns (i.e., PSAs, pamphlets, table cards, signage, public advertisements, etc.).

Measureable Goals: Produce at least 2 TMDL- specific outreach materials each year such as those listed in the program description. Record the estimated number reached for each target audience.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Public Outreach and Education Program Procedure.

Year 1 Response: The Table Cards distributed to Virginia Tech dining halls have TMDL-specific information and illicit discharge contact information. The residential packet fliers also contain TMDL-specific information about the Stroubles Creek watershed and contain illicit discharge contact information. The aquatic insects on display with an informational poster at Steppin' Out and Sustainability Week highlighted the core benthic impairment issue with Stroubles Creek as determined by the Stroubles Creek TMDL Implementation Plan. The high priority water quality issues addressed through TMDL-specific outreach materials were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: The Table Cards distributed to Virginia Tech dining halls have TMDL-specific Information and illicit discharge contact information. The residential packet fliers also contain TMDL-specific information about the Stroubles Creek watershed and contain illicit discharge contact information. The aquatic insects on display with an informational poster at Steppin' Out highlighted the core benthic impairment issue with Stroubles Creek as determined by the Stroubles Creek TMDL Implementation Plan. The high priority water quality issues addressed through TMDL-specific outreach materials were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: The Table Cards distributed to Virginia Tech dining halls have TMDL-specific Information and illicit discharge contact information. The residential packet fliers also contain TMDL-specific information about the Stroubles Creek watershed and contain illicit discharge contact information. The aquatic insects on display with an informational poster at Steppin' Out highlighted the core benthic impairment issue with Stroubles Creek as determined by the Stroubles Creek TMDL Implementation Plan. The high priority water quality issues addressed through TMDL-specific outreach materials were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: The Table Cards distributed to Virginia Tech dining halls have TMDL-specific Information and illicit discharge contact information. The residential packet fliers also contain TMDL-specific information about the Stroubles Creek watershed and contain illicit discharge contact information. The aquatic insects on display with an informational poster at Steppin' Out highlighted the core benthic impairment issue with Stroubles Creek as determined by the Stroubles Creek TMDL Implementation Plan. The high priority water quality issues addressed through TMDL-specific outreach materials were trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

1.2.4 – Storm Drain Markers

Program Description: Provide stormwater outreach through the use of storm drain markers to remind the community about the vital role they play in watershed health and in the prevention and detection of illicit discharges.

Measureable Goals: Mark new storm structures within 6 months of project termination. Replace existing storm drain markers as needed. Record and map the number of storm drains marked each year.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Storm Drain Marking Standard Operating Procedure

Year 1 Response: Five Virginia Tech student volunteers marked 58 storm drains around the Town of Blacksburg on April 7, 2014 during **The Big Event**. Storm drain markers were placed on campus at the newly constructed inlets around Signature Engineering, Center for the Arts, Sigma Phi Epsilon, and Human & Agricultural Biosciences Building 1 soon after the projects' termination. 90% of the Virginia Tech main campus storm drains have been marked and are documented via ArcGIS mapping. The high priority water quality issues addressed through this outreach medium are trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: 4 Virginia Tech student volunteers marked 48 storm drains around the Town of Blacksburg on April 11, 2015 during the Big Event. Storm drain markers were placed on campus at newly constructed inlets soon after the projects' completion. Approximately 90% of the Virginia Tech campus storm drains have been marked and are documented via ArcGIS mapping. The high priority water quality issues addressed through this outreach medium are trash, pet waste, and sediment. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Big Event is an annual event that takes place on Virginia Tech's campus. This year's volunteer event was scheduled for April 9, 2016, and Virginia Tech Site & Infrastructure Development had plans for their volunteers to label approximately 50 storm drains with markers indicating "no dumping." The weather with temperatures in the 30's did not allow for the storm drains to be marked since the adhesive wouldn't work properly. The 50 storm drain markers are planned to be put out during the upcoming year's Big Event.

Year 4 Response: Virginia Tech SID participated in Big Event by providing storm drain markers and necessary tools for a group of volunteers to mark storm drains. The group marked approximately 60 new unmarked storm drains in the Town of Blacksburg. This outreach event targeted illicit discharge and water quality protection.

Projected Outreach Events for the 2014-2015 Annual Reporting Year:

Outreach events are subject to change in the upcoming annual reporting year. New events are likely to be added in order to better address high priority water quality issues and target audiences.

- Steppin' Out 2014
- Sustainability Week 2014
- Gobblerfest 2014
- Storm Drain Marking
- The Lyric Theatre – stormwater advertisement
- Residential Dormitory Packets 2014
- Table Cards
- Academic Presentations
- Stormwater Training for employees

Year 2 Response: Virginia Tech was able to participate in all the outreach events mentioned above except for placing an ad at the Lyric Theatre. Please see MCM evaluations in **Appendix G** for more information regarding target audience percentages.

Projected Outreach Events for the 2015-2016 Annual Reporting Year:

Outreach events are subject to change in the upcoming annual reporting year. New events are likely to be added in order to better address high priority water quality issues and target audiences.

- Steppin' Out 2015
- Sustainability Week 2015
- Gobblerfest 2015
- Graduate Student Fair 2015
- Storm Drain Marking
- The Lyric Theatre
- Residential Dormitory Packets
- Table Cards
- Academic Presentations
- Stormwater Training for employees

Year 3 Response: Virginia Tech was able to participate in all the outreach events mentioned above except for Gobblerfest 2015. Please see MCM evaluations in **Appendix G** for more information regarding target audience percentages.

Projected Outreach Events for the 2016-2017 Annual Reporting Year:

Outreach events are subject to change in the upcoming annual reporting year. New events are likely to be added in order to better address high priority water quality issues and target audiences.

- Steppin' Out 2016
- Sustainability Week 2016
- Gobblerfest 2016
- Graduate Student Fair 2016
- Storm Drain Marking
- Residential Dormitory Packets
- Table Cards
- Academic Presentations
- Stormwater Training for employees

Year 4 Response: Virginia Tech was able to participate in all the outreach events mentioned above except for Gobblerfest 2016, Sustainability Week 2016, and Graduate Student Fair 2016. Please see MCM evaluations in **Appendix G** for more information regarding target audience percentages.

Projected Outreach Events for the 2017-2018 Annual Reporting Year:

Outreach events are subject to change in the upcoming annual reporting year. New events are likely to be added in order to better address high priority water quality issues and target audiences.

- Steppin' Out 2017
- Storm Drain Marking
- Residential Dormitory Packets
- Table Cards
- Academic Presentations
- Stormwater Training for employees
- Stormwater Day – November 2017 and April 2018
- NRV Home Show 2018
- Touch A Truck 2018
- Training sessions for updated Virginia Tech Annual Standards and Specifications

MINIMUM CONTROL MEASURE 2 – PUBLIC INVOLVEMENT/PARTICIPATION

2.1 – Promote Availability of the MS4 Program Plan & Annual Reports

2.1.1 – Promotion through Electronic Mediums

Program Description: Provide for public comment by maintaining an updated copy of the MS4 Program Plan and each annual report on the Virginia Tech stormwater website. To solicit immediate feedback, other electronic mediums such as email listservs, Facebook, Twitter, etc. will also be utilized.

Measurable Goals: Post copies of each annual report within 30 days of submittal to DEQ. Track the number of public comments received each year. Any required updates to the MS4 Program Plan will be completed at a minimum of once per year and in conjunction with annual reports. Ensure that the updated program plan is posted on the Virginia Tech stormwater website within 30 days of submittal of the annual report.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Virginia Tech MS4 Program Plan, Methods for Public Notice Program Procedure

Year 1 Response: Public comment forums are available to Virginia Tech students, staff, and faculty as well as concerned residents on the Virginia Tech Site & Infrastructure Development (SID) website website: (http://www.facilities.vt.edu/sid/ms4/mcm2_submitCmnt.asp). An advertised general stormwater email (stormwater@vt.edu) is published on all outreach materials and is managed through the Site & Infrastructure Development office. In addition, Facebook, Twitter, and the Environmental Health and Safety website's Anonymous Safety Complaints forum (http://www.ehss.vt.edu/report_issue/) are all means to contact appropriate personnel to address MS4 Program concerns or general stormwater comments. The stormwater@vt.edu email forum was utilized twice this reporting year regarding a Duck Pond potential illicit discharge/water quality concern as well as a request for additional Pet Waste Stations at the Veterinary Medicine school. A stormwater awareness survey was posted on the January 14, 2014 and February 10, 2014 Virginia Tech Daily News Email which gained 18 comprehensive responses from Virginia Tech faculty and staff members. Over 9,000 employees subscribe to the daily email and approximately 950,000 unique visitors come to the Virginia Tech News website each year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Public comment forums are available to Virginia Tech students, staff, and faculty as well as concerned residents on the Virginia Tech Site & Infrastructure Development (SID) website: (http://www.facilities.vt.edu/sid/ms4/mcm2_submitCmnt.asp). An advertised general stormwater email (stormwater@vt.edu) is published on all outreach materials and is managed through the Site & Infrastructure Development office. In addition, Facebook, Twitter, and the Environmental Health and Safety website's Anonymous Safety Complaints forum (http://www.ehss.vt.edu/report_issue/) are all means to contact appropriate personnel to address MS4 Program concerns or general stormwater comments. The stormwater@vt.edu email forum was utilized a couple times as a request for additional Pet Waste Bags when the public noticed that the stations were empty.

Year 3 Response: Public comment email forums (stormwater@vt.edu) are available to Virginia Tech Students, staff, and faculty as well as concerned residents on the Virginia Tech Site & Infrastructure Development (SID) website: <http://facilities.vt.edu/permits-inspections/stormwater-management/ms4-program/mcm-2.html>. This same email forum is published on all outreach materials and is managed through the Site & Infrastructure Development office. In addition, Facebook, Twitter, and the Environmental Health and safety website's Anonymous Safety Complaints forum (http://www.ehss.vt.edu/report_issue/) are all means to contact appropriate personnel to address MS4 Program concerns or general stormwater comments. The stormwater@vt.edu email forum was utilized a couple times as a request for additional Pet Waste Bags when the public noticed that the stations were empty. Reports were also received from the public, via the email forum, to report damaged pet waste stations on campus.

Year 4 Response: Public comment email forums (stormwater@vt.edu) are available to Virginia Tech Students, staff, and faculty as well as concerned residents on the Virginia Tech Site & Infrastructure Development (SID) website: <http://facilities.vt.edu/permits-inspections/stormwater-management/ms4-program/mcm-2.html>. This same email forum is published on all outreach materials and is managed through the Site & Infrastructure Development office. In addition, Facebook, Twitter, and the Environmental Health and safety website's Anonymous Safety Complaints forum (http://www.ehss.vt.edu/report_issue/) are all means to contact appropriate personnel to address MS4 Program concerns or general stormwater comments. The stormwater@vt.edu email forum was utilized a couple of times as a request for additional Pet Waste Bags when the public noticed that the stations were empty. Reports were also received from the public, via the email forum, to report damaged pet waste stations on campus.

2.2 – Public Involvement/Participation

2.2.1 – Stream Clean-ups/Adopt-A-Stream

Program Description: Participate in DCR's Adopt-A-Stream Program and conduct stream clean-up initiatives internally, through sponsorship, or through the use of student volunteers and student clubs/organizations.

Measurable Goals: Participate through promotion, sponsorship, or other involvement in a minimum of 4 stream clean-up and volunteer events each year. Report and track all necessary information associated with each volunteer event (number of volunteers, amount of trash collected, linear feet of stream cleaned up, number of storm drains marked, etc.)

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Adopt-A-Stream Documentation, Public Involvement and Participation Procedure Stream Clean-Up Standard Operating Procedure.

Year 1 Response: Students from the American Society of Agricultural and Biological Engineering, the Soil and Water Conservation Society, and the Environmental Student Organization, as well as a few independent students, cleaned up three stream sections in the Stroubles Creek watershed from 5:00-7:00pm on April 2, 2014 as a part of the 1.2 mile **Adopt-A-Stream Program**. Approximately 20 bags of

trash were collected in this 2-hour period. Three clean-ups were conducted through the month of April on the Enhanced Extended Detention Pond through the internal efforts of **Site & Infrastructure Development**. Two truck bed loads of tree stakes were removed and approximately 3 bags of trash were collected. Approximately 10 students from **The Students for Clean Energy** organization conducted a stream clean-up around the Stroubles Creek interconnection between the Town of Blacksburg and Virginia Tech often referred to as “Triangle Park”. Approximately 3 bags of trash and 1 bag of recycling were collected during this .25mile effort. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Students from the Environmental & Water Resources Institute and Coast Oceans Ports & Rivers Institute, cleaned up areas including Webb Branch, areas near the Virginia Tech Vet Med Detention Pond and areas around the Duck Pond on October 11, 2014 as a part of the 3 mile **Adopt-A-Stream Program**. Approximately 22 bags of trash were collected in this 3-hour period by 21 individuals. A clean-up was also conducted on October 18, 2014 by **the Virginia Tech Chapter of the American Water Resources Association** located at Alumni Pond, Duck Pond and stretches of Stroubles Creek starting at the StREAM lab. Nine individuals participated to remove 9 trash bags of trash and large debris within 2.5 hours.

Year 3 Response: Three separate stream cleanup events took place in the reporting year as a part of the Adopt-A-Stream Program that Virginia Tech Site & Infrastructure Development participates in. The Virginia Tech Chapters of AWRA and ASABE met on October 10, 2015 with 15 volunteers to pick up trash and debris. Also on October 10, 2015, the Virginia Tech Chapters of ASCE, AWWA/VWEA, and EWRI/COPRI had 22 volunteers clean-up 8 bags of trash around the Duck Pond and Vet Med Retention Pond on campus. Virginia Tech Site & Infrastructure Development organized a third stream cleanup on April 24, 2016, and 11 individuals participated. Please see **Appendix H** for documentation of Public Participation Activities.

Year 4 Response: Two separate stream cleanup events organized and supported by Virginia Tech Site & Infrastructure Development (SID) took place on Virginia Tech’s campus during the reporting year. The first stream cleanup on October 22, 2016 focused on cleaning up trash across a 2-mile stretch along Stroubles Creek and included 18 volunteers from the Virginia Tech chapters of **EWRI and COPRI**. The second clean up took place in April of 2017 and included 85 volunteers from the **College of Natural Resources** who helped remove invasive species along stream banks.

2.2.2 – Volunteer Events

Program Description: Participate in volunteer events through the use of student volunteers and student clubs/organizations (i.e., Big Event, Greeks Giving Back, etc.).

Measurable Goals: Participate through promotion, sponsorship, or other involvement in a minimum of 4 stream clean-up and volunteer events each year. Report and track all necessary information associated with each volunteer event (number of volunteers, amount of trash collected, linear feet of stream cleaned up, number storm drains marked, etc.)

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Public Involvement and Participation Procedure

Year 1 Response: Virginia Tech student volunteers marked 58 storm drains around the Town of Blacksburg on April 7, 2014 during **The Big Event**. Students from the American Society of Agricultural and Biological Engineering, Soil and Water Conservation Society, and the Environmental Student Organization, as well as a few independent students, cleaned up three sections of the Stroubles Creek watershed from 5:00 - 7:00pm on April 2, 2014 as a part of the 1.2 mile **Adopt-A-Stream Program**. Approximately 20 bags of trash were collected in this 2 hour period. Three clean-ups were conducted through the month of April on the Enhanced Extended Detention Pond through internal efforts of **Site & Infrastructure Development**. Approximately 10 students from **The Students for Clean Energy** organization conducted a stream clean-up around the Stroubles Creek interconnection between the Town of Blacksburg and Virginia Tech at the intersection of Stanger Street and Prices Fork Road often referred to as “Triangle Park.” Approximately 3 bags of trash and 1 bag of recycling were collected during this effort. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: 5 Virginia Tech student volunteers marked 48 storm drains around the Town of Blacksburg, specifically in the Smith’s Landing Area and the Oak Manor Area on April 11, 2015 during **The Big Event**. Students from the Environmental & Water Resources Institute and Coast Oceans Ports & Rivers Institute, cleaned up areas including Webb Branch, areas near Virginia Tech Vet Med Detention pond and areas around the Duck Pond on October 11, 2014 as a part of the 3 mile **Adopt-A-Stream Program**. Approximately 22 bags of trash were collected in this 3-hour period by 21 individuals. A clean-up was also conducted on October 18, 2014 by **the Virginia Tech Chapter of the American Water Resources Association** located at Alumni Pond, Duck Pond and stretches of Stroubles Creek starting at StREAM lab. Nine individuals participated to remove 9 trash bags of trash and large debris within 2.5 hours. Site & Infrastructure Development purchased 250 trees and sponsored a multiple tree plantings along Stroubles Creek. The trees were planted by 15 volunteers over the course of a few weeks in April 2015. Please see **Appendix H** for documentation of Public Participation Activities.

Year 3 Response: **Big Event** is an annual event that takes place on Virginia Tech’s campus. This year’s volunteer event was scheduled for April 9th 2016, and Virginia Tech Site & Infrastructure Development had plans for their volunteers to label approximately 50 storm drains with markers indicating “no dumping”. The weather with temperatures in the 30’s did not allow for the storm drains to be marked since the adhesive wouldn’t work properly. The 50 storm drain markers are planned to be put out during the upcoming year’s Big Event. Three separate stream cleanup events took place in the reporting year as a part of the Adopt-A-Stream Program that Virginia Tech Site & Infrastructure Development participates in. The Virginia Tech Chapters of AWRA and ASABE met on October 10, 2015 with 15 volunteers to pick up trash and debris. Also on October 10, 2015, the Virginia Tech Chapters of ASCE, AWWA/VWEA, and EWRI/COPRI had 22 volunteers clean-up 8 bags of trash around the Duck Pond and Vet Med Retention Pond on campus. Virginia Tech Site & Infrastructure Development organized a third stream cleanup on April 24, 2016, and 11 individuals participated. Virginia Tech Site and Infrastructure Development sponsored a tree planting on March 24, 2016 for a class in the Department of Natural Resources and the Environment. On March 26, 2016, Virginia Tech Site & Infrastructure Development sponsored a joint tree planting and stream clean-up event hosted by Saves Stroubles and the Office of Energy & Sustainability. The event included 118 volunteers who planted a total of 155 trees and cleaned approximately 2 miles of Stroubles Creek. The event actually made the local news for the great efforts that took place for this event. Please see **Appendix H** for documentation of Public Participation Activities.

Year 4 Response: Virginia Tech SID participated in the **Big Event** by providing storm drain markers and necessary tools for a group of volunteers to mark storm drains. The group marked approximately 60 new unmarked storm drains in the Town of Blacksburg. This outreach event targeted illicit discharge and water quality protection. Two separate stream cleanup events organized and supported by Virginia Tech Site & Infrastructure Development (SID) took place on Virginia Tech's campus during the reporting year. The first stream cleanup on October 22, 2016 focused on cleaning up trash across a 2-mile stretch along Stroubles Creek and included 18 volunteers from the Virginia Tech chapters of **EWRI and COPRI**. The second cleanup took place in April of 2017 and included 85 volunteers from the **College of Natural Resources** who helped remove invasive species along stream banks. A **tree-planting event** sponsored and funded by Virginia Tech Site & Infrastructure Development took place in April 2017 and included 85 student volunteers from the College of Natural Resources and Virginia Tech faculty/staff members. The volunteers planted 297 trees and shrubs to create a riparian buffer and support enhanced water quality along Holton Branch.

MINIMUM CONTROL MEASURE 3 – ILLICIT DISCHARGE DETECTION & ELIMINATION

3.1 – Illicit Discharge Detection Program

3.1.1 – Storm Sewer System Map (Inventory Outfall Locations)

Program Description: The storm sewer map will show the location of all MS4 outfalls. Each mapped outfall will be given a unique identifier. The name and location of all waters receiving discharges from the MS4 outfalls and associated HUCs will be mapped. The location of all known points of discharge including those physically interconnected to another MS4 will be mapped.

Measurable Goals: The storm sewer system map will be updated to meet the requirements set forth in 9VAC25-890-40 Section II B 3 a (3) by 2017 (48 months after permit coverage).

Schedule of Activities: A comprehensive storm sewer system map will be completed by 2017 (48 months after permit coverage). Once the storm sewer system map is updated, it will be evaluated annually and updated as necessary.

Table 2: Outfall Map

Program Update Requirement:	Permit Reference:	Update Completed By:
Outfall Map	Section II B 3 a (3)	48 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: IDDE/ORI Standard Operating Procedure

Year 1 Response: Virginia Tech maintains stormwater infrastructure information in the campus GIS database. This database is updated on an as-needed basis as campus projects are completed or new information is discovered through Outfall Reconnaissance Inventory, etc. The comprehensive storm sewer system map and all required components will be incorporated into the campus GIS database. Upon completion, the map will be evaluated annually and updated as needed.

Year 2 Response: During Year 2 Virginia Tech has worked on incorporating the comprehensive storm sewer system map into the campus GIS database. Upon completion, the map will be evaluated annually and updated as needed. Please see Year 1 Response above.

Year 3 Response: Virginia Tech maintains an extensive GIS database which contains the elements required for the storm sewer system map. The GIS database is maintained by the Facilities Department and is updated on an as-needed basis.

Year 4 Response: Virginia Tech maintains an extensive GIS database which contains the elements required for the storm sewer system map. The GIS database is maintained by the Facilities Department and is updated on an as-needed basis.

3.1.2 – Inspect Stormwater Outfalls for Dry Weather Discharge

Program Description: Dry weather screening methodologies will be used to detect and eliminate illicit discharges to the MS4 that include field observations and field screening monitoring.

Measurable Goals: A minimum of 50 outfalls will be screened each year.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: IDDE/ORI Standard Operating Procedure

Year 1 Response: Last annual reporting year, Site & Infrastructure Development ensured that all Virginia Tech main campus outfalls were inspected during the five year permit cycle. 16 outfalls were inspected during that time and 8 potential outfalls were passed on to the Virginia Tech GIS Manager. Since that time, Site & Infrastructure Development has been working to revisit the ORI Program. This includes developing revised mapping of outfalls (including the “new” outfalls) that contribute to Stroubles Creek, a revised interconnection map, and a comprehensive ORI Log that includes inspections from 2009 and forward. Site & Infrastructure Development also worked in coordination with VT Biological Systems Engineering and the Town of Blacksburg to conduct a watershed-scale bacteria sampling and inventory as a part of the Research Experience for Undergraduates Program (REU). The inventory included outfall interconnections and crucial outfall points that would assist in indicating where bacteria might enter Stroubles Creek. Other inventory and field observation opportunities included storm drain marking and the Adopt-A-Stream clean-up on April 2, 2014. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: During Year 2, all 73 Virginia Tech main campus outfalls were inspected and no “new outfalls” were discovered. Further documentation of inspections is available by request and is not provided as part of the Annual Report.

Year 3 Response: During Year 3, all 73 Virginia Tech Main Campus outfalls were inspected. A couple outfalls were unable to be inspected due to construction and will be inspected as soon as they are accessible. One new outfall was discovered during the Outfall Reconnaissance Inventory. The new outfall has been added to the inventory and will be included in future inspection efforts.

Year 4 Response: During Year 4, all Virginia Tech Main Campus outfalls that could be accessed were inspected. A couple of outfalls were unable to be inspected due to construction and will be inspected as soon as they are accessible. Further documentation of inspections is available by request and is not provided as part of the Annual Report.

3.1.3 – Identify/Inspect Priority Areas

Program Description: Investigations will be performed to locate and identify campus areas that have the potential for illicit discharges and need to be monitored on a regular basis. These areas will be mapped and regularly monitored.

Measurable Goals: Priority areas will be evaluated each year and modified when necessary. Each priority area will be inspected at a minimum of once per year. If an illicit discharge occurs outside of the identified priority areas, the associated area will be added to the Map of Priority Areas and incorporated into the inspection schedule.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: IDDE/ORI Standard Operating Procedure, Map of Priority Areas

Year 1 Response: A consulting firm assisted Virginia Tech in identifying high priority/high potential areas on Virginia Tech’s main campus utilizing a checklist and general inspection form. Sites were considered for SWPPP development if the report showed that they were both high priority and high potential. Next steps include identifying all personnel and operations on each individual site to refine stormwater pollution mitigation efforts prior to SWPPP development. Those facilities that did not qualify as both high priority and high potential will be incorporated into the illicit discharge detection and elimination (IDDE) program as priority areas. All locations will be tracked using ArcGIS. Next steps for the IDDE Program include developing inspection forms, establishing a frequency of inspections, and confirming responsible parties. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: The facilities that did not qualify as both high priority and high potential have been incorporated into the IDDE Program. All locations will be tracked using ArcGIS. Next steps for the IDDE Program include developing inspection forms, establishing a frequency of inspections, and confirming responsible parties. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: The facilities that did not qualify as both high priority and high potential have been incorporated into the IDDE Program. All locations will be tracked using ArcGIS. Next steps for the IDDE Program include developing inspection forms, establishing a frequency of inspections, and confirming responsible parties. This process is ongoing; further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: The facilities that did not qualify as both high priority and high potential have been incorporated into the IDDE Program. All locations will be tracked using ArcGIS. Next steps for the IDDE Program include developing inspection forms, establishing a frequency of inspections, and confirming responsible parties. This process is ongoing; further documentation of implementation is available by request and is not provided as a part of the Annual Report.

3.1.4 – Reporting by Staff and Students

Program Description: The Virginia Tech Environmental Health and Safety (EHS) Department has a webpage available to report Anonymous Safety Complaints. This reporting page and other necessary contact information will be publicized to university staff and students via outreach materials and the Virginia Tech stormwater website.

Measurable Goals: A minimum of 3 outreach methods will be used to promote illicit discharge reporting methods.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party Facilities Department – Site & Infrastructure Development and Environmental Health and Safety

Necessary Documents: IDDE/ORI Standard Operating Procedure, EHS reporting page

Year 1 Response: Individuals can report spills and illicit discharges on the **Environmental Health and Safety webpage:** www.ehss.vt.edu/report_issue. This website link and further information regarding illicit discharges are available on the **Site & Infrastructure Development website** (www.sid.vt.edu) and on **illicit discharge business cards and table cards**. The business cards have been distributed to all on-campus residents as well as all staff members that attend “MS4 Stormwater Training” sessions. The business card includes the aforementioned contact information as well illicit discharge indicators. Approximately 2,538 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls for the second and third weeks in October. Each table card remained for a total of one week before it was removed. According to the average daily headcount in each dining hall, 3,901 students enter these dining halls each day and 20,026 on and off-campus students held dining plans last year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Individuals can report spills and illicit discharges on the **Environmental Health and Safety webpage:** www.ehss.vt.edu/report_issue. This website link and further information regarding illicit discharges are available on the **Site & Infrastructure Development website** (www.sid.vt.edu) and on **illicit discharge business cards and table cards**. Approximately 2000 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls during Year 2. Each table card remained for a total of one week before it was removed. The average daily headcount in each dining hall ranges from approximately 1,000-6,600 customers each day. There were approximately 18,500 dining plan holders during the 2014-2105 academic year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Individuals can report spills and illicit discharges on the **Environmental Health and Safety webpage:** www.ehss.vt.edu/report_issue. This website link and further information regarding illicit discharges are available on the **Site & Infrastructure Development website** (www.sid.vt.edu) and on **illicit discharge business cards and table cards**. Approximately 1,400 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls during Year 3. Each table card remained for a total of one week before it was removed. The average daily headcount in each dining hall ranges from approximately 1,000-6,600 customers each day. There were approximately 18,500 dining plan holders during the 2015-2016 academic year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Individuals can report spills and illicit discharges on the **Environmental Health and Safety webpage:** www.ehss.vt.edu/report_issue. This website link and further information regarding illicit discharges are available on the **Site & Infrastructure Development website** (www.sid.vt.edu) and on **illicit discharge business cards and table cards**. Approximately 1,600 TMDL-focused **Table Cards** were distributed throughout the Virginia Tech campus dining halls during Year 4. Each table card

remained for a total of one week before it was removed. Dining Services serves approximately 7.4 million meals per year and there are approximately 19,000 dining plan holders. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

3.2 – Illicit Discharge Elimination

3.2.1 – Trace and Remove Illicit Discharges

Program Description: Virginia Tech will promptly address and determine the source of illicit discharges. Methodologies to determine the source of an illicit discharge shall be conducted and documented as appropriate.

Measurable Goals: Track the number of illicit discharges and potential illicit discharges through a database. Map all illicit discharges to determine potential high priority areas. Document all actions taken to trace and eliminate the suspected illicit discharge.

Table 3: Illicit Discharge Procedures

Program Update Requirement:	Permit Reference:	Update Completed By:
Illicit Discharge Procedures	Section II B 3	12 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development and Environmental Health and Safety

Necessary Documents: IDDE/ORI Standard Operating Procedure, Storm Sewer System Map

Year 1 Response: All potential illicit discharges are documented in Autodesk VAULT. All illicit discharges are mapped in ArcGIS. All documentation and photographic evidence from each discharge is also stored in Autodesk VAULT. A summary of the annual reporting period’s illicit discharges can be found in **Appendix C**. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: All potential illicit discharges are now documented in Laserfiche. All illicit discharges are mapped in ArcGIS. All documentation and photographic evidence from each discharge is also stored in Laserfiche. A summary of the annual reporting period’s illicit discharges can be found in **Appendix C**. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: All potential illicit discharges are now documented in Laserfiche. All illicit discharges are mapped in ArcGIS. All documentation and photographic evidence from each discharge is also stored in Laserfiche. A summary of the annual reporting period’s illicit discharges can be found in **Appendix C**. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: All potential illicit discharges are now documented in Laserfiche. All illicit discharges are mapped in ArcGIS. All documentation and photographic evidence from each discharge are also stored in Laserfiche. A summary of the annual reporting period's illicit discharges can be found in **Appendix C**. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

3.2.2 – Prohibiting Illicit Discharges

Program Description: Virginia Tech will develop a policy in order to effectively prohibit non-stormwater discharges from entering the storm sewer system. This policy will apply to all university staff and students as well as contracted personnel.

Measurable Goals: Virginia Tech will have a final policy implemented by summer of 2017.

Schedule of Activities: Virginia Tech will have a final draft of the policy by summer of 2015 with implementation to follow by the summer of 2017. Progress updates will be given in each annual report until the policy is completed and implemented. Once the policy is implemented, it will be evaluated annually and updated as necessary.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Virginia Tech Illicit Discharge Detection and Elimination (IDDE) Policy (once implemented)

Year 1 Response: The Illicit Discharge Detection and Elimination Policy has been reviewed and approved internally and is in its final stages of review and approval by upper management, including the Virginia Tech Board of Visitors. This Policy and a Stormwater Management policy will be pushed forward in the approval process in the coming months – this process may include multiple revisions. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: The Stormwater policy is still awaiting approval. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: The Stormwater policy is still awaiting approval. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: The Stormwater Policy is still awaiting approval. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

3.3 – MS4 Interconnection

3.3.1 – Notification to Interconnected MS4s

Program Description: Virginia Tech will notify, in writing, neighboring MS4s of any known physical interconnections.

Measurable Goals: During Year 1 of the 2013-2018 permit cycle, Virginia Tech will notify neighboring MS4s of any known physical interconnections and track the number of neighboring MS4s notified.

Schedule of Activities: Initial notifications will be made during Year 1 of the 2013-2018 permit cycle. Updates will be sent out if any new interconnections are found.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Notification Letters

Year 1 Response: Notification letters were sent to the Town of Blacksburg and the Virginia Department of Transportation on October 30, 2013. It was requested that each entity contact Virginia Tech if there were any inconsistencies or questions regarding MS4 interconnected outfalls. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Please see Year 1 Response above, further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Please see Year 1 Response above, further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Please see Year 1 Response above, further documentation of implementation is available by request and is not provided as a part of the Annual Report.

MINIMUM CONTROL MEASURE 4 – CONSTRUCTION SITE STORMWATER RUNOFF

4.1 – Management of Construction Site Stormwater Runoff

4.1.1 – Virginia Tech Annual Standards for Erosion and Sediment Control and Stormwater Management

Program Description: The Virginia Tech (VT) Annual Standards and Specifications for Erosion and Sediment Control (ESC) and Stormwater Management (SWM) are submitted to the Virginia Department of Environmental Quality (DEQ) for review and approval on an annual basis.

Measurable Goals: Ensure that project-specific plans are developed and implemented in accordance with the VT Annual Standards and Specifications for ESC and SWM. Submit the VT Annual Standards and Specifications for ESC and SWM to DCR each year for approval.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Approval Letter for VT Annual Standards and Specifications for ESC and SWM, Approved VT Annual Standards and Specifications for ESC and SWM

Year 1 Response: The Virginia Tech Annual Standards (VTAS&S) for ESC and SWM are located on the stormwater management website for access by project managers and the public. A copy is also available on the Site & Infrastructure Development website (www.sid.vt.edu) and in Appendix B. Virginia Tech is still working under the 2012 VTAS&S for ESC and SWM, as authorized by DEQ. Site & Infrastructure Development has until December 31, 2014 to submit a revised version of the VTAS&S for ESC and SWM for approval by DEQ. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: The latest version of the VTAS&S for ESC and SWM are located on the Site & Infrastructure Website (www.sid.vt.edu) and in **Appendix B**. Virginia Tech is still working under the 2012 VTAS&S for ESC and SWM, as authorized by DEQ. Site & Infrastructure Development has until December 31, 2015 to submit a revised version of the VTAS&S for ESC and SWM for approval by DEQ. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: The latest version of the VTAS&S for ESC and SWM are located on the Site & Infrastructure Website (www.sid.vt.edu) and in **Appendix B**. Virginia Tech is still working under the 2012 VTAS&S for ESC and SWM, as authorized by DEQ. Site & Infrastructure Development has until December 31, 2016 to submit a revised version of the VTAS&S for ESC and SWM for approval by DEQ. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: The latest version of the VTAS&S for ESC and SWM is located on the Site & Infrastructure Development Website (www.sid.vt.edu) and in **Appendix B**. Virginia Tech is still working under the 2012 VTAS&S for ESC and SWM, as authorized by the DEQ. Site & Infrastructure Development will submit a revised version of the VTAS&S for ESC and SWM for approval by DEQ by September 30,

2017. Once approved by DEQ, the latest version of the VTAS&S will be posted on the Site & Infrastructure Development website. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

4.1.2 Design Phase Meetings

Program Description: Meetings will be held in order for Virginia Tech Site & Infrastructure Development to review and provide feedback on University projects to ensure that ESC and SWM issues are addressed in an effective manner during the design phases and in accordance with the VT Annual Standards and Specifications for ESC and SWM.

Measurable Goals: Attend design phase meetings on a project-by-project basis.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: VT Annual Standards for ESC and SWM, Pre-Construction Meeting Attendance Sheets

Year 1 Response: Chuck Dietz, Stormwater Compliance Manager of Site & Infrastructure Development, attended 42 design phase meetings throughout the annual reporting year. Design phase project meetings included the Dairy Barn Relocation to Kentland Farm, Human and Agricultural Biosciences Building 1, Indoor Athletic Training Facility, Upper Quad Residential Facilities, and the 460 Southgate Interchange. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Site and Infrastructure Development attended approximately 16 design phase meetings throughout the annual reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Site and Infrastructure Development attended approximately 18 design phase meetings throughout the annual reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Site and Infrastructure Development attended approximately 80 design phase meetings throughout the annual reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

4.1.3 – Requirement for ESC/SWM Plans and Review

Program Description: All ESC and SWM Plans, plan review documents, and plan review certifications must be submitted to the Virginia Tech Site & Infrastructure Development Department for review and approval.

Measurable Goals: Plan reviews will be performed to ensure compliance with the VT Annual Standards and Specifications for ESC and SWM. All plan reviews will be performed by a certified plan reviewer.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department Site & Infrastructure Development

Necessary Documents: VT Annual Standards and Specifications for ESC and SWM, list of active projects, list of certified plan reviewers

Year 1 Response: All plans for regulated land-disturbing projects have been reviewed and approved according to the VT Annual Standards and Specifications for ESC and SWM through the oversight of Site & Infrastructure Development. If projects are reviewed internally, they are conducted by certified plan reviewers in Site & Infrastructure Development. According to the complexity of the project and the workload at Site & Infrastructure Development, plan reviews may also be outsourced to engineering firms under a term contract. See **Appendix B** for more information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: All plans for regulated land-disturbing projects have been reviewed and approved according to the VT Annual Standards and Specifications for ESC and SWM through the oversight of Site & Infrastructure Development. Please see Year 1 Response above and **Appendix B** for more information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: All plans for regulated land-disturbing projects have been reviewed and approved according to the VT Annual Standards and Specifications for ESC and SWM through the oversight of Site & Infrastructure Development. Please see Year 1 Response above and **Appendix B** for more information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: All plans for regulated land-disturbing projects have been reviewed and approved according to the VT Annual Standards and Specifications for ESC and SWM through the oversight of Site & Infrastructure Development. Please see Year 1 Response above and **Appendix B** for more information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

4.1.4 – ESC and SWPPP Inspections on Project Sites

Program Description: University projects that are approved for land-disturbing activities will be inspected for compliance with the approved ESC/SWM Plans. All ESC and SWPPP inspections will be conducted by certified personnel as follows:

- **Initial Inspection:** Upon installation of initial ESC Measures
- **Routine ESC Inspections:**
 - Every 14 calendar days
 - Within 48-hours of a runoff producing rainfall event that accumulates 0.25” of rainfall or more during the storm event
- **Routine SWM Inspections:**
 - Every 5 business days
 - Every 4 business days in the Stroubles Creek TMDL
- **Final Inspection:** Upon completion of the project, prior to termination of any VAR10 Permit

Measurable Goals: Record the total number of inspections performed each reporting year. Record the enforcement actions taken during each reporting year.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department —Site & Infrastructure Development

Necessary Documents: Summary of Total Number of Inspections performed during reporting year, Summary of enforcement action taken during reporting year

Year 1 Response: As a state entity, Virginia Tech does not have enforcement authority. Only the Department of Environmental Quality is able to issue official enforcement actions such as a Notice of Violation and a Stop Work Order. Site & Infrastructure Development may initiate informal correspondence, often through email notification, with operators, contractors, and project managers regarding non-compliance. This does not qualify as an enforcement action according to permit language. With that being said, Virginia Tech performed 244 inspections on VAR10 regulated projects and 82 inspections on regulated projects that disturbed less than 1 acre this reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Virginia Tech performed 209 inspections on VAR10 regulated projects and 14 inspections on regulated projects that disturbed less than 1 acre this reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Virginia Tech performed 392 inspections on 23 projects this reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Virginia Tech performed 233 inspections on 21 projects this reporting year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

4.1.5 – Tracking of Land-Disturbing Activities

Program Description: Virginia Tech land-disturbing projects must comply with the VT Annual Standards for ESC and SWM. Prior to commencement of a land-disturbing activity, the project must receive written approval for the plan from the Virginia Tech Site & Infrastructure Development Department.

Measurable Goals: Annually record the total number of regulated land-disturbing activities and associated acres disturbed.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department Site & Infrastructure Development

Necessary Documents: VT Annual Standards and Specifications for ESC and SWM, list of all regulated land-disturbing activities, and associated acres disturbed per project for each reporting year.

Year 1 Response: There are 18 projects on Virginia Tech’s main campus that were regulated under VAR10 permit coverage during the annual reporting cycle. Those projects that are current, and those that have since been terminated, are both included in **Appendix D**. Active land-disturbing projects disturbing less than 1 acre, which do not require VAR10 permit coverage but are regulated under the VT Annual Standards and Specifications for ESC, are also included in the **Appendix D** document. The acreage disturbed by the 18 regulated projects was 94.87 acres. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: There are 11 projects on Virginia Tech’s main campus that were regulated under VAR10 permit coverage during the annual reporting cycle. The acreage disturbed by the 11 regulated projects was 119 acres. Those projects that are current, and those that have since been terminated, are both included in **Appendix D**. Active land-disturbing projects disturbing less than 1 acre, which do not require VAR10 permit coverage but are regulated under the VT Annual Standards and Specifications for ESC, are also included in the **Appendix D** document. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: There are 10 projects on Virginia Tech’s main campus that were regulated under VAR10 permit coverage during the annual reporting cycle. The acreage disturbed by the 10 regulated projects was approximately 266 acres. Those projects that are current, and those that have since been terminated, are both included in **Appendix D**. Active land-disturbing projects disturbing less than 1 acre, which do not require VAR10 permit coverage but are regulated under the VT Annual Standards and Specifications for ESC, are also included in the **Appendix D** document. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: There are 11 projects on Virginia Tech’s main campus that were regulated under VAR10 permit coverage during the annual reporting cycle. The acreage disturbed by the 11 regulated projects was approximately 243 acres. Those projects that are current, and those that have since been terminated, are both included in **Appendix D**. Active land-disturbing projects disturbing less than 1 acre, which do not require VAR10 permit coverage but are regulated under the VT Annual Standards and Specifications for ESC, are also included in the **Appendix D** document. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

MINIMUM CONTROL MEASURE 5 – POST-CONSTRUCTION STORMWATER MANAGEMENT

5.1 – Stormwater Management Facilities

5.1.1 – Tracking of Stormwater Management Facilities

Program Description: Virginia Tech will maintain an updated electronic database of all known operator-owned permanent Stormwater Management Facilities in accordance with the requirements set forth in 9VAC25-890-40Section II B 5 e.

Measurable Goals: Update the electronic database on a project-by-project basis during each reporting year. Submit an updated permanent Stormwater Management Facility inventory list with each annual report.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Stormwater Management Facilities inventory list, Stormwater Management Facilities inventory map, Stormwater Management Facility Operation and Maintenance (O&M) Manual

Year 1 Response: Virginia Tech maintains an electronic database of all known operator-owned permanent Stormwater Management Facilities on campus. This database is updated on an as needed basis as projects are terminated. An updated permanent Stormwater Management Facility inventory list is included in **Appendix D**.

Year 2 Response: Virginia Tech maintains an electronic database of all known operator-owned permanent Stormwater Management Facilities on campus. This database is updated on an as needed basis as projects are terminated. An updated permanent Stormwater Management Facility inventory list is included in **Appendix D**.

Year 3 Response: Virginia Tech maintains an electronic database of all known operator-owned permanent Stormwater Management Facilities on campus. This database is updated on an as-needed basis as projects are terminated. An updated permanent Stormwater Management Facility inventory list is included in **Appendix D**.

Year 4 Response: Virginia Tech maintains an electronic database of all known operator-owned permanent Stormwater Management Facilities on campus. This database is updated on an as-needed basis as projects are terminated. An updated permanent Stormwater Management Facility inventory list is included in **Appendix D**.

5.1.2 – Inspection of Stormwater Management Facilities

Program Description: Virginia Tech utilizes the University’s work order system (HokieServ) to ensure that known operator-owned permanent Stormwater Management Facilities are inspected in accordance with the comprehensive Virginia Tech Stormwater Management Facility O&M Manual.

Measurable Goals: Inspect each known permanent stormwater management facility in accordance with the Virginia Tech Stormwater Management Facilities O&M Manual. Annually track and report the total number of inspections completed each year.

Schedule of Activities:

Table 4: Operator-owned Stormwater Management Inspection Procedures

Program Update Requirement:	Permit Reference:	Update Completed By:
Operator-owned Stormwater Management Inspection Procedures	Section II B 5	12 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Stormwater Management Facility Inspection Written Procedures, Stormwater Management Facility O&M Manual

Year 1 Response: Periodic inspections for maintenance and proper functionality have been performed on all Virginia Tech Stormwater Management Facilities (SWMF). Virginia Tech has successfully incorporated the SWMF inspections into the current work order system. This system allows for improved communication between the Virginia Tech Grounds Department and Site & Infrastructure Development as well as improved tracking of inspections and maintenance activities. Work orders are automatically generated each month to ensure proper inspection frequency. Please the table below for the total number of inspections performed during Year 1 of the 2013-2018 Permit Cycle.

BMP Type	Quantity	Total Number of Inspections
Bioretention	15	190
Detention/Extended Detention/Retention *this includes Enhanced Extended Detention Basin and Detention Swale	13	119
Green Roof	2	20
Filtterra and Biofilter Units	4	27
Underground Detention	6	6
Underground Water Quality Units	7	16

Year 2 Response: Periodic inspections for maintenance and proper functionality have been performed on all Virginia Tech Stormwater Management Facilities (SWMF). All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come on line during Year 2. Please the table below for the total number of inspections performed during Year 2 of the 2013-2018 Permit Cycle.

BMP Type	Quantity	Total Number of Inspections
Bioretention	15	85
Detention/Extended Detention/Retention *this includes Enhanced Extended Detention Basin and Detention Swale	16	58

Green Roof	2	8
Filtterra and Biofilter Units	6	24
Underground Detention	6	4
Underground Water Quality Units	7	10

Year 3 Response: Periodic inspections for maintenance and proper functionality have been performed on all Virginia Tech Stormwater Management Facilities (SWMFs). All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come on line during Year 3. Please the table below for the total number of inspections performed during Year 3 of the 2013-2018 Permit Cycle.

BMP Type	Quantity	Total Number of Inspections
Bioretention	16	86
Detention/Extended Detention/Retention *this includes Enhanced Extended Detention Basin and Detention Swale	16	67
Green Roof	2	12
Filtterra and Biofilter Units	15	32
Underground Detention	6	6
Underground Water Quality Units	7	7

Year 4 Response: Periodic inspections for maintenance and proper functionality have been performed on all Virginia Tech Stormwater Management Facilities (SWMFs). All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come on line during Year 4. Please the table below for the total number of inspections performed during Year 4 of the 2013-2018 Permit Cycle.

BMP Type	Quantity	Total Number of Inspections
Bioretention	16	100
Detention/Extended Detention/Retention *this includes Enhanced Extended Detention Basin and Detention Swale	17	96
Green Roof	2	14
Filtterra and Biofilter Units	15	92
Underground Detention	6	6
Underground Water Quality Units	7	7

5.1.3 – Maintenance of Stormwater Management Facilities

Program Description: With the help of the Virginia Tech Facilities Operations Department, campus stormwater management facilities are maintained on an as-needed basis each year.

Measurable Goals: Maintenance of campus stormwater management facilities will be performed on an as-needed basis each year. Record the number of inspections and maintenance items completed each year.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Facilities Operations will be responsible for the maintenance of campus stormwater management facilities. Facilities Department – Site & Infrastructure Development will be responsible for recording the number of inspections and maintenance items.

Necessary Documents: Stormwater Management Facility O&M Manual, inspection forms, HokieServ Summary for each reporting year

Year 1 Response: All Virginia Tech stormwater management facilities (SWMFs) have been inspected periodically for maintenance and proper functionality. SWMFs have been successfully incorporated into the current Hokieserv work order system. This system allows for improved communication between the Virginia Tech Grounds Department and Site & Infrastructure Development as well as improved tracking of inspection and maintenance activities. Work orders are automatically generated to ensure proper inspection frequency. All inspection reports are available in the Site & Infrastructure Development office upon request. Virginia Tech will evaluate its current inspection and maintenance program for effectiveness and make improvements as necessary. See the MCM5 Evaluation in **Appendix G** for further information.

Year 2 Response: All Virginia Tech stormwater management facilities (SWMFs) are maintained on an as-needed basis. All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come on line during Year 2. Virginia Tech will evaluate its current inspection and maintenance program for effectiveness and make improvements as necessary. See the MCM5 Evaluation in **Appendix G** for further information.

Year 3 Response: All Virginia Tech stormwater management facilities (SWMFs) are maintained on an as-needed basis. All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come online during Year 3. Virginia Tech will evaluate its current inspection and maintenance program for effectiveness and make improvements as necessary. See the MCM5 Evaluation in **Appendix G** for further information.

Year 4 Response: All Virginia Tech stormwater management facilities (SWMFs) are maintained on an as-needed basis. All inspection reports are available in the Site & Infrastructure Development office upon request. The work order system utilized during SWMF inspections has been updated to reflect any new SWMFs that have come online during Year 4. Virginia Tech will evaluate its current inspection and maintenance program for effectiveness and make improvements as necessary. See the MCM5 Evaluation in **Appendix G** for further information.

MINIMUM CONTROL MEASURE 6 – POLLUTION PREVENTION/GOOD HOUSEKEEPING

6.1 – Municipal Facility Pollution Prevention and Good Housekeeping

6.1.1 – Daily Good Housekeeping Procedures

Program Description: Virginia Tech will develop and implement written procedures designed to minimize or prevent pollutant discharge from daily municipal operations and activities.

Measurable Goals: Develop and implement written procedures designed to minimize or prevent pollutant discharge from certain municipal operations and activities 24 months after permit coverage. Incorporate written procedures into the training curriculum after completion. Post final written procedures on the Virginia Tech Environmental Health and Safety website. Update written procedures as needed.

Schedule of Activities:

Table 5: Daily Good Housekeeping Procedures

Program Update Requirement:	Permit Reference:	Update Completed By:
Daily Good Housekeeping Procedures	Section II B 6 a	24 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development and Virginia Tech Environmental Health and Safety

Necessary Documents: Final Written Procedures (once completed)

Year 1 Response: User-friendly good housekeeping procedures were created for: the disposal of wastewater; road, street, and parking lot maintenance; equipment maintenance; application, storage and transport of pesticides, herbicides, and fertilizers; illicit discharge detection; waste material disposal; washwater disposal; wastewater disposal; dewatering operations; and bulk/salt storage. All procedures can be found on the Environmental Health and Safety Frequently Asked Questions website (http://www.ehss.vt.edu/detail_pages/faq_list.php?categories_document_categ1Page=6). Good housekeeping educational material is also incorporated into the stormwater management training presentations. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Please see Year 1 Response above, all procedures can be found on the Environmental Health and Safety Frequently Asked Questions website (http://www.ehss.vt.edu/detail_pages/faq_list.php?categories_document_categ1Page=6). Good housekeeping educational material is also incorporated into the stormwater management training presentations. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Please see Year 1 Response above, all procedures can be found on the Environmental Health and Safety Frequently Asked Questions website (http://www.ehss.vt.edu/detail_pages/faq_list.php?categories_document_categ1Page=6). Good

housekeeping educational material is also incorporated into the stormwater management training presentations. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Please see Year 1 Response above, all procedures can be found on the Environmental Health and Safety Frequently Asked Questions website (http://www.ehss.vt.edu/detail_pages/faq_list.php?categories_document_categ1Page=6). Good housekeeping educational material is also incorporated into the stormwater management training presentations. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.1.2 – High Priority Facilities

Program Description: Virginia Tech will develop a list of high priority facilities and identify which of those high priority facilities have a high potential of chemicals or other materials to be discharged into the storm sewer system.

Measurable Goals: Develop list of all high priority facilities on campus. Set up checklist and ranking system to better classify high priority areas and determine which facilities will require a SWPPP.

Schedule of Activities:

Table 6: SWPPP Locations & Implementation

Program Update Requirement:	Permit Reference:	Update Completed By:
Identification of Locations Requiring SWPPPs	Section II B 6 b	12 months after permit coverage
SWPPP Implementation	Section II B 6 b (3)	48 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development

Necessary Documents: Inspection Checklist, list of High Priority Facilities

Year 1 Response: Virginia Tech enlisted a consultant to aid in identifying high priority/high potential areas on Virginia Tech’s main campus utilizing a checklist and general inspection form. Sites were considered for SWPPP development if the report showed that they were both high priority and high potential. Next steps include identifying all personnel and operations on each individual site to refine stormwater pollution mitigation efforts prior to SWPPP development. Those facilities that did not qualify as both high priority and high potential will be incorporated into the illicit discharge detection and elimination (IDDE) program. All locations will be tracked using ArcGIS. All identified locations area available by request but were not included as part of the Annual Report. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

High Priority Areas Requiring a SWPPP
1. Sterrett Facilities Complex
2. Toms Creek Basin Facility
3. Agronomy Research Barns on Prices Fork Road

4. Large Equipment Storage at Old Mill Road
5. Glade Road Research Center
6. Virginia Tech Electric Service

Year 2 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1. Virginia Tech is currently in the process of assessing funding needs to develop SWPPPs for these High Priority/High Potential Areas.

Year 3 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1. Virginia Tech is currently in the process of assessing funding needs to develop SWPPPs for these High Priority/High Potential Areas.

Year 4 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1.

6.1.3 – Develop and Implement SWPPPs for High Priority-High Potential Facilities

Program Description: All high priority areas that are determined to have a high potential of chemicals or other materials to be discharged into the storm sewer system will need to be covered under a SWPPP.

Measurable Goals: Develop SWPPP for all high priority facilities that are determined to have a high potential of chemicals or other materials to be discharged into the storm sewer system, within 48 months of permit coverage.

Schedule of Activities:

Table 7: SWPPP Locations & Implementation

Program Update Requirement:	Permit Reference:	Update Completed By:
Identification of Locations Requiring SWPPPs	Section II B 6 b	12 months after permit coverage
SWPPP Implementation	Section II B 6 b (3)	48 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development (Responsible Party will change once it is determined which departments and facilities will need SWPPPs developed)

Necessary Documents: Inspection Checklist, List of High Priority Facilities, High Priority/High Potential Facility SWPPPs (once developed)

Year 1 Response: Virginia Tech enlisted a consultant to aid in identifying illicit discharge high priority/high potential areas on Virginia Tech’s main campus. The investigation included recommendations for those facilities that require a SWPPP. Virginia Tech has discussed and verified the list of high priority/high potential areas that need a SWPPP. SWPPP locations are tracked using ArcGIS. Next steps include developing and implementing a SWPPP, developing inspection forms, establishing a frequency of inspections, and confirming responsible parties. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

High Priority Areas Requiring a SWPPP
1. Sterrett Facilities Complex
2. Toms Creek Basin Facility
3. Agronomy Research Barns on Prices Fork Road
4. Large Equipment Storage at Old Mill Road
5. Glade Road Research Center
6. Virginia Tech Electric Service

Year 2 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1. Virginia Tech is currently in the process of assessing funding needs to develop SWPPPs for these High Priority/High Potential Areas.

Year 3 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1. Virginia Tech is currently in the process of assessing funding needs to develop SWPPPs for these High Priority/High Potential Areas.

Year 4 Response: Please see Year 1 Response above, high priority/high potential areas on Virginia Tech’s Main campus were identified during Year 1. Virginia Tech has developed SWPPPs for their current High Priority Areas. Implementation and inspections will begin during the next reporting year.

6.2 – Landscaping Management and Pest Control

6.2.1 – Pesticide Application by Certified Pesticide Applicators

Program Description: Pesticide application will only be performed by certified pesticide applicators.

Measurable Goals: Annually track certified pesticide applicators and appropriate certification information in a database and update as necessary.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Athletic Department, Virginia Tech Golf Course, Virginia Tech Department of Horticulture, Virginia Tech Department of Recreational Sports, Virginia Tech Turfgrass Research Center, Virginia Tech Facilities Operations, Virginia Tech College of Agriculture and Life Sciences (CALs) College Farm, Facilities Department Site & Infrastructure Development

Necessary Documents: List of Certified Pesticide Applicators

Year 1 Response: There are six groups on campus that are responsible for applying pesticides and fertilizers as needed: Agricultural Operations, Virginia Tech Athletics, Virginia Tech Golf Course, Virginia Tech Grounds Department, Peggy Lee Hahn Garden Pavilion, and Virginia Tech Recreational Sports. Each department is responsible for maintaining Certification for Applicators and a list of products used. Copies of the current lists can be found in the Site & Infrastructure Development office. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Please see Year 1 Response above, there are six groups on campus that are responsible for applying pesticides and fertilizers as needed. Each department is responsible for

maintaining Certification for Applicators and a list of products used. Copies of the current lists can be found in the Site & Infrastructure Development office. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Please see Year 1 Response above, there are six groups on campus that are responsible for applying pesticides and fertilizers as needed. Each department is responsible for maintaining Certification for Applicators and a list of products used. Copies of the current lists can be found in the Site & Infrastructure Development office. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Please see Year 1 Response above, there are six groups on campus that are responsible for applying pesticides and fertilizers as needed. Each department is responsible for maintaining Certification for Applicators and a list of products used. Copies of the current lists can be found in the Site & Infrastructure Development office. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.2.2 – Turf and Landscape Management

Program Description: Virginia Tech currently maintains 21 nutrient management plans that are managed by several different departments. These nutrient management plans cover all campus areas where nutrients are applied to a contiguous area greater than one acre and are developed by a certified nutrient management planner.

Measurable Goals: Annually track the total acreage of lands where turf and landscape NMPs are required. Annually track the acreage of lands upon which turf and landscape NMPs have been implemented.

Schedule of Activities: In accordance with the 2013-2018 MS4 Permit Requirements, Virginia Tech will determine if any additional NMPs will be needed. Virginia Tech will then develop and implement the additional NMPs, if necessary. Please see the table below for more information.

Table 8: NMP Locations & Implementation

Program Update Requirement:	Permit Reference:	Update Completed By:
NMP Locations	Section II B 6 c (1) (a)	12 months after permit coverage
NMP Implementation	Section II B 6 c (1) (b)	60 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Virginia Tech Athletic Department, Virginia Tech Golf Course, Virginia Tech Department of Horticulture, Virginia Tech Department of Recreational Sports, Virginia Tech Turfgrass Research Center, Virginia Tech Facilities Operations, Virginia Tech College of Agriculture and Life Sciences (CALS) College Farm, Facilities Department —Site & Infrastructure Development

Necessary Documents: Nutrient Management Plans, list of applicable lands and associated acreage

Year 1 Response: Virginia Tech currently maintains 21 nutrient management plans that are managed by seven different departments. During Year 1, Virginia Tech assessed all properties where nutrients are

applied to a contiguous area greater than an acre and determined that no additional nutrient management plans are needed. Please see Table 3 for a current list of all nutrient management plans. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Please see Table 3 for a current list of all nutrient management plans and associated contact information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Please see Table 3 for a current list of all nutrient management plans and associated contact information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Please see Table 3 for a current list of all nutrient management plans and associated contact information. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.3 – Personnel Training

6.3.1 – Annual Written Training Plan

Program Description: Virginia Tech will develop an annual written training plan that will outline training schedules and implementation of training requirements.

Measurable Goals: Once developed, the annual written training plan will be evaluated and modified each year. Each MS4 Annual Report will contain the annual written training plan for the upcoming year as well as a progress report from the previous year.

Schedule of Activities: During Year 1, Virginia Tech will develop an annual training plan which will outline training schedules and implementation of training requirements. The annual training plan will be added to the MS4 Program and updated annually.

Table 9: Training Schedule and Program

Program Update Requirement:	Permit Reference:	Update Completed By:
Training Schedule and Program	Section II B 6	12 months after permit coverage

*Updates will be submitted with the appropriate annual report.

Responsible Party: Facilities Department – Site & Infrastructure Development, Environmental Health and Safety

Necessary Documents: Annual Written Training Plan

Year 1 Response: The Annual Written Training Plan has been developed and incorporates Virginia Tech Dining Services stormwater management and awareness training as well as general stormwater management and awareness training for Virginia Tech Facilities Operations personnel. It also includes responsible parties and contact information as well as preliminary annual training schedules. Further

documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: The Annual Written Training Plan has been reviewed and updated to reflect training procedures for the upcoming year. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.3.2 – Stormwater Pollution Prevention Training for Virginia Tech Personnel

Program Description: A general stormwater pollution prevention course will be developed for applicable Virginia Tech personnel. The course will cover pollution prevention techniques that can be utilized when performing certain job tasks as well as when illicit discharges have been detected.

Measurable Goals: Applicable field crews for the Virginia Tech Facilities Operations Department will receive stormwater pollution prevention training every 2 years. Track the number of employees trained each year.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Environmental Health and Safety will be responsible for implementing the training. Facilities Department —Site & Infrastructure Development will be responsible for developing the training curriculum as well as any future modifications when necessary.

Necessary Documents: Annual Training Plan, Stormwater Pollution Prevention Training material, training session attendance logs

Year 1 Response: 1,436 Virginia Tech Dining Services employees have received stormwater management training, which includes job-specific pollution prevention techniques such as disposing of wastewater and used oil, and cleaning off floor mats. Employees were trained as a part of New Hire Orientation or, for returning staff members, as an annual training requirement for all levels of employees including student, wage, and salary employees. 1,092 of the 1,436 employees are students. It can be assumed that most, if not all, of the students are off-campus students. 279 of the 1,436 are wage staff members and 63 are salaried staff members. 139 Virginia Tech employees were trained through Environmental Health and Safety on MS4 awareness and pollution prevention, which includes disposal information and spill procedures for those working in areas and with equipment susceptible to generating stormwater pollution. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: During Year 2, 1602 Virginia Tech Dining Services employees have received stormwater management training, which includes job-specific pollution prevention techniques such as

disposing of wastewater and used oil, and cleaning off floor mats. 223 Virginia Tech employees were trained through Environmental Health and Safety on MS4 awareness and pollution prevention, which includes disposal information and spill procedures for those working in areas and with equipment susceptible to generating stormwater pollution. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: During Year 3, 2002 Virginia Tech Dining Services employees have received stormwater management training, which includes job-specific pollution prevention techniques such as disposing of wastewater and used oil, and cleaning off floor mats. 104 Virginia Tech employees were trained through Environmental Health and Safety on MS4 awareness and pollution prevention, which includes disposal information and spill procedures for those working in areas and with equipment susceptible to generating stormwater pollution. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: During Year 4, 1735 Virginia Tech Dining Services employees have received stormwater management training, which includes job-specific pollution prevention techniques such as disposing of wastewater and used oil, and cleaning off floor mats. 125 Virginia Tech employees were trained through Environmental Health and Safety on MS4 awareness and pollution prevention, which includes disposal information and spill procedures for those working in areas and with equipment susceptible to generating stormwater pollution. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.4 - Management of Municipal Facilities

6.4.1 – Street Sweeping

Program Description: Virginia Tech owns and operates a street sweeper to pick up litter and debris from parking lots and roads on campus. All campus parking lots and roads will be swept regularly with additional measures taken during football seasons.

Measureable Goals: Parking lots and roads will be swept on an annual basis. Track mileage of roads and parking lots swept. Track amount of material collected during street sweeping operations.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Facilities Operations

Necessary Documents: Street Sweeper Log

Year 1 Response: Virginia Tech continues to maintain streets and parking lots by sweeping them as needed as well as before and after large sporting events. A log showing dates and locations of street sweeping is available upon request. A total of approximately 33,550 pounds was collected from September 9, 2013 through July 21, 2014. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Virginia Tech continues to maintain streets and parking lots by sweeping them as needed as well as before and after large sporting events. A log showing dates and locations of street

sweeping is available upon request. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Virginia Tech continues to maintain streets and parking lots by sweeping them as needed as well as before and after large sporting events. A log showing dates and locations of street sweeping is available upon request. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Virginia Tech continues to maintain streets and parking lots by sweeping them as needed as well as before and after large sporting events. A log showing dates and locations of street sweeping is available upon request. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.4.2 – Stormwater Structure Maintenance and Cleaning

Program Description: Storm structures around campus are routinely cleaned and repaired when necessary by Virginia Tech Facilities Operations. This prevents sediment and other pollutants from entering the storm sewer system and ensures that stormwater structures are free of obstructions.

Measureable Goals: Clean storm sewer inlets on an annual basis and maintain/repair when needed. Track and record when cleaning is completed and repairs are made.

Schedule of Activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Facilities Operations

Necessary Documents: Stormwater System Repair Log

Year 1 Response: Virginia Tech works to perform storm sewer system inlet cleaning and maintenance as much as possible. The Virginia Tech Mechanical Utilities Department routinely cleans the storm drains around campus. A university-owned vacuum truck is used to aid in this process. The maintenance and cleaning records are tracked and maintained in the work order system. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 2 Response: Virginia Tech continues to perform sewer system inlet cleaning and maintenance as much as possible. The maintenance and cleaning records are tracked and maintained in the work order system. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 3 Response: Virginia Tech continues to perform sewer system inlet cleaning and maintenance as much as possible. The maintenance and cleaning records are tracked and maintained in the work order system. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

Year 4 Response: Virginia Tech continues to perform sewer system inlet cleaning and maintenance as much as possible. The maintenance and cleaning records are tracked and maintained in the work order system. Further documentation of implementation is available by request and is not provided as a part of the Annual Report.

6.4.3 – Salt Storage and Application

Program Description: The Virginia Tech Facilities Operations Department applies pretreatment products to campus roads and parking lots in order to reduce the amount of salt applied. After salt or other materials are applied, regular street sweeping will occur to remove the materials from roads and parking lots, preventing it from entering the storm sewer system. Deicing agents containing urea or other forms of nitrogen or phosphorous will not be applied to parking lots, roadways, sidewalks, or other paved surfaces.

Measurable Goals: Annually track the amount of salt and other materials applied to aid in snow and ice removal.

Schedule of activities: Continue to implement the current program and evaluate annually.

Responsible Party: Virginia Tech Facilities Operations

Necessary Documents: Salt Application Log

Year 1 Response: The Virginia Tech Grounds Department uses a spreadsheet to track the application and location of salt and brine used during snow events each year. The current salt application log for November 16, 2013 to April 24, 2014 is available upon request.

Year 2 Response: The Virginia Tech Grounds Department uses a spreadsheet to track the application and location of salt and brine used during snow events each year. The current salt application log for is available upon request.

Year 3 Response: The Virginia Tech Grounds Department uses a spreadsheet to track the application and location of salt and brine used during snow events each year. The current salt application log for is available upon request.

Year 4 Response: The Virginia Tech Grounds Department uses a spreadsheet to track the application and location of salt and brine used during snow events each year. The current salt application log for is available upon request.

Appendix B – Virginia Tech Annual Standards and Specifications for ESC & SWM

The 2012 Virginia Tech Annual Standards and Specifications for Erosion and Sediment Control and Stormwater Management have been included in **Appendix B**. They remain in effect until September 30, 2017, as approved initially by the Virginia Department of Conservation and Recreation and subsequently by the Virginia Department of Environmental Quality.



VirginiaTech

Annual Standards and Specifications

for

Erosion and Sediment Control

and

Stormwater Management

January 2012 - December 2012

INTRODUCTION

Virginia Polytechnic Institute and State University (VPI&SU), also referred to as Virginia Tech (VT), has incorporated Annual Standards and Specifications for Erosion and Sediment Control (ESC) and Stormwater Management (SWM) that are integral components of Virginia Tech's design, construction, maintenance, and management of the university's facilities and campuses. The Virginia Tech Annual Standards and Specifications for ESC and SWM submittal has been developed to provide information regarding VT's implementation in accordance with the Virginia Erosion and Sediment Control Law (§10.1-560 et. seq.), the Virginia Erosion and Sediment Control Regulations (4VAC50-30 et. seq.), the Virginia Erosion and Sediment Control Certification Regulations (4VAC50-50 et. seq.), the Virginia Stormwater Management Act (§10.1-603 et. seq.), and the Virginia Stormwater Management Program (VSMP) Permit Regulations (4VAC50-60 et. seq.) as related to municipal separate storm sewer systems (MS4) and regulated construction activities.

Virginia Tech Annual Standards and Specifications for ESC and SWM shall be administered by VT Site and Infrastructure Development and shall apply to all design, construction and maintenance activities undertaken by Virginia Tech, either by its internal workforce or contracted to external entities, where such activities are regulated by the Virginia ESC Law and Regulations or the Virginia SWM Act and VSMP Permit Regulations. During any inspections of Virginia Tech's land disturbing activities by DCR, EPA or other such environmental agencies, compliance with the approved Virginia Tech Annual Standards and Specifications for ESC and SWM (and all parts thereof), the Virginia ESC Law and Regulations, the Virginia SWM Act and the VSMP Permit Regulations will be expected.

Virginia Tech Annual Standards and Specifications for ESC and SWM are submitted to the Virginia Department of Conservation and Recreation (DCR) for review and approval on an annual basis. Virginia Tech shall ensure that project specific plans are developed and implemented in accordance with these Annual Standards and Specifications. This submittal constitutes Virginia Tech's commitment to execute all provisions contained herein on our regulated land disturbing activities and land development projects. As such, this submittal will be made available and utilized as an operational guidance by all appropriate Virginia Tech and DCR personnel. This submittal and errata information are available for download as PDF files at: <http://www.facilities.vt.edu/stormwater>.

Table of Contents

1.0 ANNUAL STANDARDS AND SPECIFICATIONS ADMINISTRATION..... 1

2.0 ANNUAL STANDARDS AND SPECIFICATIONS PERSONNEL..... 2

3.0 ANNUAL STANDARDS AND SPECIFICATIONS IMPLEMENTATION..... 3

4.0 ESC/SWM PLANS (DELIVERABLES)..... 5

5.0 INSPECTIONS 8

6.0 VARIANCES and EXCEPTIONS..... 11

7.0 LAND-DISTURBING ACTIVITIES: 13

8.0 LONG-TERM MAINTENANCE:..... 13

APPENDICES

Appendix – A: ESC Checklists

Part 1 – Plan Preparer’s Checklist

Part 2 – Plan Preparer’s Minimum Standard Checklist

Appendix – B: SWM Checklist

Part 1 – Plan Preparer’s Checklist for Stormwater Management Plans

Part 2 – Plan Preparer’s Checklist for Detention, Retention, and Impoundment BMPs

Appendix – C: ESC Inspection Forms

Appendix – D: SWM Inspection Forms

Appendix – E: Proposed Land-disturbing Activities

Appendix – F: Past and Current Land-disturbing Activities

Appendix – G: Variance Request Form

Appendix – H: Exception Request Form

Appendix – I: Plan Reviewer Checklist

Appendix – J: Post-construction BMPs

Appendix – K: ESC Measures/Practices Certification

Appendix – L: Pre-Approved Variances

1.0 ANNUAL STANDARDS AND SPECIFICATIONS ADMINISTRATION

- 1.1 All projects involving land-disturbing activity subject to the Virginia Erosion and Sediment Control Law (§10.1-560 et seq. as amended) and the Virginia Erosion and Sediment Control Regulations (4VAC50-30 et seq. as amended) shall be bound by the Virginia Tech Annual Standards and Specifications for Erosion and Sediment Control and Stormwater Management as approved by DCR. All projects involving land-disturbing activity subject to the Virginia Stormwater Management Act (§10.1-603 et seq. as amended) and the VSMP Permit Regulations (4VAC50-60 et seq. as amended) shall be bound by the Virginia Tech Annual Standards and Specifications for Erosion and Sediment Control and Stormwater Management as approved by DCR.
- 1.2 The Virginia Tech Annual Standards and Specifications for ESC and SWM approved by DCR are composed of general specifications for ESC and SWM that apply to the land-disturbing activities listed in Section 1.1 above and include, by reference, the following:
 - 1.2.1 Virginia Erosion and Sediment Control Law (§10.1-560 et seq. as amended);
 - 1.2.2 Virginia Erosion and Sediment Control Regulations (4VAC50-30 et seq. as amended);
 - 1.2.3 Virginia Erosion and Sediment Control Certification Regulations (4VAC50-50 et seq. as amended);
 - 1.2.4 Virginia Erosion and Sediment Control Handbook, 1992, as amended;
 - 1.2.5 Virginia Stormwater Management Act (§10.1-603 et seq. as amended);
 - 1.2.6 Virginia Stormwater Management Permit Regulations (4VAC50-60 et seq. as amended);
 - 1.2.7 Virginia Stormwater Management Handbook, 1999, as amended;
 - 1.2.8 Technical Bulletins, as amended, on the Virginia DCR website at www.dcr.virginia.gov; and
 - 1.2.9 Memos, as amended, on the Virginia DCR website at www.dcr.virginia.gov.
- 1.3 Any land-disturbing activity carried out in a locality with a local ESC program with more stringent regulations than those of the state program shall be consistent with the requirements of the local program. SWM projects shall, to the maximum extent practicable, meet the technical requirements of the local stormwater management program in addition to the technical requirements noted above.
- 1.4 Site-Specific ESC Plans shall be prepared for all projects involving a regulated land-disturbing activity as defined in §10.1-560. For all regulated land-disturbing projects, site-specific ESC Plans shall be submitted to the Virginia Tech Site & Infrastructure Development Department (VTSID) for review. Prior to starting the land-disturbing project, as defined in §10.1-560, the project must have written approval issued to the Virginia Tech project manager by the VTSID Department for the submitted Plan.
- 1.5 Site-Specific SWM Plans shall be prepared for all projects involving a regulated land-disturbing activity that requires a Virginia Stormwater Management General Permit for Discharges from Construction Activities (VSMP) or land-disturbing activity contained

within a watershed of a regional water quality stormwater management facility. Prior to starting a land-disturbing project requiring a SWM Plan, the project must submit site-specific SWM Plans and have written approval issued to the VT project manager by the VTSID Department for the Plan.

All land-disturbing activities requiring an ESC Plan, but not requiring a VSMP Permit for Construction Activities, shall clearly indicate in the narrative of the ESC Plan as to the reason a VSMP Permit for Construction Activities is not required.

- 1.6 The Virginia Tech Site & Infrastructure Development Department may request DCR to grant a project specific variance or exception to the approved Virginia Tech Annual Standards and Specifications for ESC and SWM. All requested variances and exceptions are to be considered unapproved until written approval from DCR is received. Refer to Section 0 for more information on variances and exceptions.

2.0 ANNUAL STANDARDS AND SPECIFICATIONS PERSONNEL

The Virginia Tech Site and Infrastructure Development Department (www.sid.vt.edu) shall be the plan approving authority for Virginia Tech Projects and the administrator of the Virginia Tech Annual Standards and Specifications for ESC and SWM. The following is a breakdown in responsibilities and titles in terms of the Virginia Tech Annual Standards and Specifications for ESC and SWM. The following personnel are assigned and/or delegated authority related to ensuring compliance with the Virginia Tech Annual Standards and Specifications for ESC and SWM. Responsibilities may be combined in terms of staffing resources only if the person responsible for the task(s) is qualified per Section 1.2.3.

- 2.1 Senior ESC and SWM Program Administrator shall have overall management and coordination responsibilities for the Virginia Tech Annual Standards and Specifications for ESC and SWM. This person shall be DCR certified as a combined administrator.
- 2.2 ESC Program Administrator shall have management and coordination responsibilities for the erosion and sediment control portion of the Virginia Tech Annual Standards and Specifications for ESC and SWM. This person shall be DCR certified as a combined administrator.
- 2.3 ESC Plan Reviewers shall be responsible for reviewing plans for compliance with the Virginia Tech Annual Standards and Specifications for ESC and SWM and applicable laws and regulations with an emphasis on ESC components. The assigned persons shall be DCR certified as a plan reviewer.
- 2.4 SWM Plan Reviewers shall be responsible for reviewing plans for compliance with the Virginia Tech Annual Standards and Specifications for ESC and SWM and applicable laws and regulations with an emphasis on stormwater management components. The assigned persons shall be DCR certified as a plan reviewer.

- 2.5 ESC and SWM Inspectors shall have the responsibility for inspecting erosion and sediment control, stormwater management, VSMP permits, SWPPP, and MS4 practices to ensure compliance with all applicable laws, regulations, as well as the Virginia Tech Annual Standards and Specifications for ESC and SWM. The assigned persons shall be DCR certified as an inspector.
 - 2.5.1 All ESC and SWPPP Inspectors shall provide a certification statement located in Appendix C and Appendix D, respectively.
- 2.6 Responsible Land Disturber (RLD) shall hold a valid Responsible Land Disturber Certificate as issued by DCR and shall be accountable for assigned projects.
- 2.7 Certifications shall be in accordance with the Virginia Erosion and Sediment Control Certification Regulations (4VAC50-50 et seq. as amended).

3.0 ANNUAL STANDARDS AND SPECIFICATIONS IMPLEMENTATION

The Virginia Tech Site and Infrastructure Development Department (VTSID) is responsible for the administration, compliance, and enforcement of the Virginia Tech Annual Standards and Specifications for ESC and SWM. The VTSID Department reviews and inspects land-disturbing activities, including new and renovated projects for compliance with the Virginia Tech Annual Standards and Specifications for ESC and SWM.

Virginia Tech land-disturbing projects shall comply with the Virginia Tech Annual Standards and Specifications for Erosion and Sediment Control and Stormwater Management. Prior to commencement of a land-disturbing project, the project must have received written approval for the Plan from the VTSID Department.

3.1 Submittals

ESC and SWM Plans (includes ESC and SWM Narrative and Construction Drawings), reports, certifications, and record documents shall be submitted to the Virginia Tech Site & Infrastructure Development Department for review and approval. All submittals shall be in accordance with the approved Virginia Tech Annual Standards and Specifications for ESC and SWM. The submittal must include the appropriate information and data necessary to support the licensed professional's work. Please refer to Section 4.0 for more information on submittals to the VTSID Department.

3.2 Plan Reviews

Plan reviews shall be conducted by certified personnel, who are certified in accordance with the Virginia Erosion and Sediment Control Certification Regulations (4VAC50-50 et seq. as amended). Plan reviews shall ensure compliance with the Virginia Tech Annual Standards and Specifications for ESC and SWM.

3.3 Inspections

ESC and SWM Inspector(s) is responsible for enforcing the project ESC and SWM Plan and other environmental commitments. Refer to Section 5.0 for more information on inspections.

The Responsible Land Disturber (RLD) shall be in charge of and responsible for carrying out any regulated land-disturbing activities. The RLD shall attend the pre-construction ESC meeting and sign the approved ESC and SWM Plan.

The licensed professional is responsible for collecting, surveying, and documenting the stormwater management facility and/or stormwater conveyance channels ensuring the structures are constructed in accordance with the approved Plan.

3.4 Changes and Amendments to Approved Plans

An approved Plan may be changed by the Virginia Tech Site & Infrastructure Development Department in the following cases:

- (i) Where inspection has revealed the plan is inadequate to satisfy applicable regulations; or
- (ii) Where the person responsible for carrying out the approved Plan finds that because of changing circumstances, or for other reasons, the approved Plan cannot be effectively carried out, proposed amendments to the Plan, consistent with the requirements of this article, are agreed upon by the plan-approving authority and the person responsible for carrying out the Plan.

Amendments to an approved ESC and SWM Plan must be submitted in writing to the VTSID Department. Amendments shall not be considered approved until written notice is provided. The amendment must comply with the approved Virginia Tech Annual Standards and Specifications for ESC and SWM.

3.5 Land-Disturbing Activities

All regulated land-disturbing activities shall maintain a copy of the approved ESC and SWM Plan on site unless otherwise approved by the VTSID department.

All regulated land-disturbing activities shall be performed in accordance with the approved Virginia Tech Annual Standards and Specifications for ESC and SWM. In order to reduce the sediment load to the surrounding creeks, streams, and water bodies, at least 50% of the “total area to be disturbed” shall be stabilized at all times by either permanent or temporary means. The “total area to be disturbed” shall be defined in the narrative of the ESC and SWM Plan.

Exception: If constructability or environmental issues make the application of this section unreasonable then the responsible land disturber or design professional may submit a written request to the VTSID seeking to modify the percentage of area that must be stabilized at any one time. Please allow 10 working days to process the request. If approval has not been granted within 10 working days the request shall be considered denied.

4.0 ESC/SWM PLANS (DELIVERABLES)

4.1 Submittals

ESC and SWM Plans (includes ESC and SWM Narrative and Construction Drawings), reports, certifications, variances, exceptions, and record documents shall be submitted to the VTSID Department for review and approval. All submittals shall be in accordance with the approved Virginia Tech Annual Standards and Specifications for ESC and SWM. The submittal must include the appropriate information and data necessary to support the licensed professional's work.

4.1.1 Design Submittal and Plan Review Checklists

ESC and SWM Plans, to include narrative, calculations, design standard and specifications, plan sheets (construction drawings) and other supporting information, shall be submitted to the VTSID Department for review and approval prior to any land-disturbing activities. The submittal shall include a design that is in accordance with the Approved Virginia Tech Annual Standards and Specifications for ESC and SWM. The submittal must include the appropriate information, all calculations relevant to the Plan, checklists, and other appropriate information and documentation necessary to support the licensed professional's work.

Checklists are provided in the appendices of this document and the Stormwater Management Handbook. The designer shall include all appropriate checklists. Many items listed on the checklists may not apply to any given design and it is therefore up to the designer to indicate items as "not applicable" or "NA" as appropriate.

Profiles shall be included for storm sewer facilities and associated conveyance channels. The profile shall include the final surface, channel/pipe, and hydraulic grade line. Surcharges shall be clearly indicated on the profile.

4.1.2 Re-submittals

For all second and subsequent submittals, the submitting professional shall include a cover letter with explanations as to how each review comment is addressed that references the relevant drawing sheet or narrative location. In addition, significant changes in the Plan shall be listed as part of the cover letter. The cover letter may warrant additional comments/discussion depending upon the previous review comments or changes in the Plan.

4.1.3 Stormwater Final Report

A final report shall be submitted to the VTSID Department for review and approval prior to close-out of the project for any and all permanent BMPs associated with the project. Construction inspections and surveys, performed by a licensed professional, shall be required at each stage of installation (construction) as necessary by a licensed professional(s) to certify that the

stormwater management facility and associated conveyance systems have been built in accordance with the approved plan and design specifications. The final report shall be signed and sealed by the licensed professional(s) and include incremental surveys (drawings), a final survey (drawings), photographs, construction logs, inspection reports, geotechnical testing reports, soil reports, certification of materials, and all other applicable inspection reports and necessary documents to support and ensure the stormwater management facility and associated conveyance systems have been built in accordance with the approved Plan. The final report shall include the appropriate checklists provided in Stormwater Management Handbook. It shall be the licensed professional's responsibility to certify that as-built conditions of the system meet the quantitative and qualitative controls of the approved Plan.

If the stormwater management facility and/or associated conveyance system have not been constructed and installed in accordance with the approved Plan, then the licensed professional(s) responsible for certifying the as-built condition shall immediately notify the Virginia Tech Project Manager and the Manager for the VTSID Department. Generally, there are two potential options when the system(s) are not constructed in accordance with the approved Plan:

- Option 1: Re-construct the system(s) in accordance with the approved Plan. It will be necessary to repeat the inspections, surveys, and documentation process such that the licensed professional shall certify the system(s) are constructed in accordance with the approved Plan. It shall be the licensed professional's responsibility to certify that the as-built condition of the system(s) meet the quantitative and qualitative controls of the approved Plan.
- Option 2: Perform calculations and analysis, based on the licensed professional's surveys, data, inspections, and other applicable documentation necessary to verify the as-built conditions meet the approved Virginia Tech Annual Standards and Specifications for ESC and SWM. The licensed professional shall certify the as-built condition of the system(s) meet the quantitative and qualitative controls, as prescribed by the approved Virginia Tech Annual Standards and Specifications for ESC and SWM, and submit the final report as required in this section.

4.2 ESC/SWM Drawing Requirements (construction drawings)

The following information shall be placed on the ESC drawings (ESC sheets) and SWM drawings (SWM sheets) as indicated below. The requirements are separated into construction phase requirements and post-construction phase requirements. Both requirements are to be included on the ESC/SWM Drawings (ESC/SWM Sheets).

4.2.1 ESC Requirements

- Minimum Standards 1 through 19 (4VAC50-30-40) shall be listed on the construction drawings.
- General Erosion and Sediment Control Notes ES-1 through ES-16 shall be listed on the construction drawings.

- The total disturbed area and the amount of disturbed area per phase shall be listed on the construction drawings.
- The existing impervious area and the proposed impervious area shall be listed on the construction drawings.
- Construction sequence of operations shall be provided on the construction drawings with staged implementation of erosion and sediment control measures for each phase. The area which may be disturbed in each phase shall be set forth in the construction drawings.
- Construction drawings shall provide information on the maintenance of ESC measures.
- ESC measures shall have unique identifications and the identifications shall be referenced/used in all documentation, such as, but not limited to, SWPPP, narrative, calculations, and construction drawings.
- Construction drawings shall provide a profile of stormwater conveyance systems, including, but not limited to final surface, channel/pipe, and potential/approximate utility crossings.
- Existing features to be demolished or removed, but that will require ESC measures to prevent sediment from leaving the disturbed areas, shall be clearly indicated on the construction drawings.

4.2.2 SWM Requirements

- Construction drawings shall provide information on the post-construction maintenance of permanent BMPs (post-construction BMPs). The drawings shall contain a table as provided in Appendix – J with the applicable information listed.
- For manufactured permanent BMPs, the construction drawings shall include manufacturer’s recommendation on maintenance and inspection or reference the section and page number in the narrative.
- Construction drawings shall provide information on the post-construction inspections required for each permanent BMP or reference the narrative section that contains the information.
- VTSID Department will provide the permanent BMP IDs. Please provide SID with the number of permanent BMPs used as part of the project prior to submitting the ESC/SWM Plan for review. The designer will need to add the BMP IDs provided by SID on the construction drawings, in the table provided in Appendix – J and in the narrative.

4.3 Digital Files Requirements

All digital files shall be included on a CD or DVD and submitted to the VTSID Department. Projections shall utilize the Virginia State Plane Coordinate System (U.S. Feet).

4.3.1 Treatment Areas

The area(s) directly and indirectly treated by post-construction stormwater management facilities (BMPs) shall be provided in an ESRI shapefile. Indirect areas are defined as areas being “treated” through credits, but do not directly

drain to the BMP. The shapefile shall be based on the example provided at <http://www.facilities.vt.edu/pdc/stormwater/ldpp/escswm.asp>.

4.3.2 Applicable Area

The applicable area(s) used to determine percent impervious and water quality calculations shall be provided in a shapefile as part of the ESC/SWM Plan approval process. The shapefile shall be based on the example provided at <http://www.facilities.vt.edu/pdc/stormwater/ldpp/escswm.asp>.

4.3.3 Disturbed Area

The disturbed area(s) shall be provided in a shapefile as part of the ESC/SWM Plan approval process. The shapefile shall be based on the example provided at <http://www.facilities.vt.edu/pdc/stormwater/ldpp/escswm.asp>.

4.3.4 Watersheds

The area(s) representing sub-watershed(s) shall be provided in a shapefile as part of the ESC/SWM Plan approval process. For projects in which the existing conditions and post conditions are the same, digital submission of the watersheds may not be required. Please check with SID to determine whether or not digital files of the watersheds are required. The shapefile shall be based on the example provided at <http://www.facilities.vt.edu/pdc/stormwater/ldpp/escswm.asp>.

4.3.5 Stormwater Final Report

A digital copy of the stormwater final report shall be provided as a PDF.

5.0 INSPECTIONS

Virginia Tech Site & Infrastructure Development Department shall perform periodic ESC inspections, at a minimum, every two weeks and within 48 hours of a runoff producing rainfall event. In addition, inspections shall be made during or immediately following initial installation of erosion and sediment controls and at the completion of the project. Virginia Tech is responsible for and shall ensure compliance with the approved Plan and the Virginia Tech Annual Standards and Specifications for ESC and SWM (§10.1-564.F and §10.1-603.5.B). Virginia Tech shall perform post-construction inspections for stormwater management facilities as indicated in the approved Plan.

Licensed professional(s) shall perform inspections and surveys as he or she deems necessary to support his or her certification that each permanent stormwater management facility and associated conveyance system are installed and constructed in accordance with the approved Plan.

DCR shall perform random site inspections to assure compliance with the Virginia Erosion and Sediment Control Law (§10.1-560 et. seq.), the Virginia Erosion and Sediment Control Regulations (4VAC50-30 et. seq.), the Virginia Stormwater Management Act (§10.1-603 et. seq.), and the Virginia Stormwater Management Program (VSMP) Permit Regulations (4VAC50-60 et. seq.). Reference: §10.1-603.5.B.

5.1 Erosion and Sediment Control Inspections

The inspection report provided in Appendix C shall be completed by Virginia Tech or an agent of Virginia Tech on each site inspection visit. All measures shown on the plan shall be inspected. All problems and violations shall be documented on the inspection report. Inspection reports shall specify a required corrective action for each problem or violation noted and a date the corrective action must be completed.

The Responsible Land Disturber (RLD) shall inspect, on projects larger than 1 acre, the erosion and sediment control measures periodically. The inspection reports shall be maintained on-site and shall be available for review by Virginia Tech, DCR, and other regulatory agencies.

5.2 Stormwater Pollution Prevention Plan (SWPPP) Inspections

The inspection report provided in Appendix D is designed to be customized according to the BMPs and conditions at each site and shall be completed on each site inspection visit. A number shall be assigned to all BMPs on the site plan and these numbers shall correspond to the BMP numbers listed on the inspection sheet. Specific areas that will require continuous inspections shall be numbered on the site plan and these numbers shall correspond to the numbers listed on the inspection sheet. A brief description of the BMP or area shall then be listed in the site-specific section of the inspection report. Specific structural BMPs such as construction site entrances, sediment ponds, or specific areas with silt fence (e.g., silt fence along Washington Street; silt fence along slope in NW corner, etc.) must be numbered and listed. Non-structural BMPs or areas that will be inspected (such as trash areas, material storage areas, temporary sanitary waste areas, etc) must also be numbered and listed

The Inspector shall walk the site by following the site map and numbered BMPs/areas for inspection and note whether the overall site issues have been addressed. Any required corrective actions and the completion date and responsible person for the correction shall be noted in the Corrective Action Log.

If there are no non-compliance issues/problems, then the inspector shall certify that the site is in compliance with the SWPPP, permit, regulations, and laws.

5.3 ESC Installations and Certification

Erosion and sediment control measures/practices that require calculations shall be identified on the ESC/SWM drawings and will require written certification by the design professional as to completeness and correctness of installation of the erosion. The design professional shall use the certification letter provided in Appendix K. The certification letter shall be provided to Site & Infrastructure Development within 10 business days of the erosion and sediment control measures/practices having been installed. Failure to provide certification or to properly install the erosion and sediment control measures/practices in accordance with the approved Plan will result in a violation and may require a “stop work order”.

5.4 Permanent BMP Inspections

Permanent BMPs (stormwater management facilities) shall be inspected, photographed, and surveyed throughout the construction process and at the completion of the project such that a licensed professional(s) shall lawfully certify the BMPs are constructed in accordance with the approved Plan. The licensed professional(s) shall assume full responsibility for the certification and the information on which the certification is based. A licensed professional shall prepare and submit a stormwater final report to the Virginia Tech Site & Infrastructure Development Department for approval (please refer to Section 4.0).

5.5 Post-construction Inspections

Post-construction (long-term) inspections shall be made in accordance with the Virginia Tech Annual Standards and Specifications for ESC and SWM, and manufacturer’s recommendation, when applicable. These inspections shall be performed by a DCR certified inspector.

5.6 Notification of Repeat Violations

Notification in the event of a repeat violation will be the responsibility of the inspector. The inspector shall note the number of occurrences for each violation noted in the inspection report. At the time of the second inspection, if the noted violations have not been addressed from the previous inspection report the inspector shall notify Virginia Tech Site & Infrastructure Development by email or by phone depending on the significance of the violation. For repeat violations not requiring immediate attention, an email notification shall be sent to SID@vt.edu. The email notification shall include the following information:

- (i) the project name
- (ii) a brief explanation of the repeat violation(s)
- (iii) the number of times the violation has been repeated
- (iv) an explanation of how and when the contractor was notified of the violation(s)
- (v) the date of initial recorded incident(s)

If the violation is critical in nature, the inspector shall immediately contact the following parties proceeding to the next party when the above party is inaccessible:

<u>Party Name</u>	<u>Affiliation</u>	<u>Primary Number</u>	<u>Alternative Number</u>
Whitney Blankenship	VT - ESC Program Admin.	(540) 231 – 2414	(540) 231 - 9097
Virginia Tech Project Manager		As listed in SWPPP	
Craig Moore	VT - Senior ECS Program Admin.	(540) 231 - 1788	(540) 231 - 9097
Lauren Grimes	VT - Water Resources Engineer	(540) 231-3716	(540) 231 - 9097
Ed Watson	VT - Director, Univ. Design & Constr.	(540) 231-7930	(540) 231 - 9097

Virginia Tech shall be responsible for notifying the local Virginia Department of Conservation and Recreation in the event of repeat violations. After the second inspection and subsequent inspections if the violations have not been corrected a notification shall be sent to the Director of Virginia Tech University Design and Construction and/or the permit holder of the project for each non-compliant inspection. At the time of the fourth inspection, or if the violation has existed for four (4) or more weeks, whichever is less, if previously noted violations have not been corrected Virginia Tech shall notify DCR. At this time, DCR shall determine the extent of the violations and may issue a Notice to Comply, Stop Work Order or other enforcement action dependent on the severity and length of the violation.

6.0 VARIANCES and EXCEPTIONS

Variations and Exceptions to regulations must ensure protection of off-site properties and resources from damage. Economic hardship is not sufficient reason to request a variance or an exception.

For a Variance to become part of a project specific ESC Plan, a written variance request must be submitted by the Virginia Tech Site & Infrastructure Development Department for review and approval by DCR. This request must include an explanation of the reasons for requesting the variance and describe the specific site conditions necessitating the request. The request must also include a detailed description of the alternative ESC practice and justification that the practice meets the intent of the Minimum Standard for which the variance is sought (Ref. 4VAC50-30-50).

For an Exception to become part of a specific SWM Plan, a written exception request must be submitted by the Virginia Tech Site & Infrastructure Development Department for review and approval by DCR. This request must include an explanation of the reasons for requesting the exception and describe the specific site conditions necessitating the request. The request must also include a detailed description of the alternative SWM practice and justification that the practice meets the intent of the minimum standard or technical criteria or both for which the exception is sought (Ref. 4VAC50-60-140).

6.1 ESC Variance Request Policy and Procedures:

- The Virginia Tech Site & Infrastructure Development Department shall coordinate the review and approval of all requested variances with DCR's ESC Program representative(s).
- All requests for project specific variances to the Virginia Tech Annual Standards and Specifications for ESC and SWM shall be sent by the design professional to Virginia Tech Site & Infrastructure Development and shall be accompanied by complete details and documentation, including justification for the requested variance and impacts associated with the variance request. The design professional shall complete the form included in Appendix G.

- The Virginia Tech ESC and SWM Administrator (or representative) will review the request and determine if the request should be sent to DCR for further consideration. If the Administrator determines the request should not be sent to DCR, then the request shall be considered denied.
- Variance requests will be sent by the Virginia Tech Site & Infrastructure Development Department to the DCR Christiansburg Regional Office and to the Virginia Erosion and Sediment Control Program Manager for review and approval, if determined to be appropriate.
- All requested variances shall be considered unapproved until written approval from DCR is received.
- All approved variances shall be listed in the General Notes section of the ESC & SWM construction drawings for land disturbing activities and included in the narrative.

6.2 SWM Exception Request Policy and Procedures:

- The Virginia Tech Site & Infrastructure Development Department will coordinate the review and approval of all requested exceptions with DCR's SWM Program representative(s).
- All requests for project specific exceptions to the Virginia Tech Annual Standards and Specifications for ESC and SWM shall be sent by the design professional to Virginia Tech Site & Infrastructure Development and shall be accompanied by complete details and documentation, including justification for the requested exception and impacts associated with the exception. The design professional shall complete the form included in Appendix H.
- The Virginia Tech ESC and SWM Administrator (or representative) will review the request and determine if the request should be sent to DCR for further consideration. If the Administrator determines the request should not be sent to DCR, then the request shall be considered denied.
- Exception requests will be sent by the Virginia Tech Site & Infrastructure Development Department to the DCR Christiansburg Regional Office and to the Virginia Stormwater Permitting Manager for review and approval, if determined to be appropriate.
- All requested exceptions shall be considered unapproved until written approval from DCR is received.
- All approved exceptions shall be listed in the General Notes section of the ESC and SWM plans for land disturbing activities and included in the Narrative.

6.3 Pre-approved variances:

The Virginia Tech Site & Infrastructure Development Department has included as part of the annual standards and specifications certain ESC measures (ESC controls) that are not included in the VESCH. As part of the approved annual standards and specifications, these ESC measures may be included as part of a project specific Plan. Appendix L includes a list of pre-approved variances for certain ESC measures that may be included as part of the ESC/SWM Plan.

In order for a project to utilize a pre-approved ESC measure, the ESC/SWM Plan must contain a detail sheet, inspection instructions, installation instructions, and maintenance instructions. ESC Measures not specifically included as part of the approved ESC/SWM

Plan shall not be used on the project unless the ESC/SWM Plan is amended to include the specific ESC Measure.

7.0 LAND-DISTURBING ACTIVITIES:

7.1 Proposed Land-disturbing activities:

A list of regulated land-disturbing activities expected to be under contract during the referenced time period are included in Appendix E. The list includes project location, estimated disturbed acreage by watershed, approximate start and completion date for each project, and a point of contact for each project. As additional land-disturbing activities not included on this list come under contract, information regarding such activities shall be submitted on separate lists on a quarterly basis to DCR. Information on specific land-disturbing activities not included on the list will be provided to DCR Christiansburg Regional Office no less than two weeks prior to the start of the activity. Estimated disturbed acreage for individual projects must be reported in the following manner:

- (i) Linear Projects – beginning and ending coordinates, or
- (ii) Site Development – central to polygon or point coordinates.

Note: Coordinates may be reported by UTM (x, y, zone, datum) or state plane (x, y, zone, datum).

7.2 Past and Current Land-disturbing activities:

A list of completed and actual regulated land-disturbing activities either under contract or terminated during the previously referenced time period or previous year, whichever is greater, is included in Appendix F. The list includes project location, project start and completion date, and actual disturbed area.

7.3 Project Tracking and Notification

- Virginia Tech shall use GIS to track regulated land-disturbing activities.
- The Virginia Tech Land-disturbing GIS will be updated monthly with project information as related to ESC and SWM.

7.4 Responsible Land Disturber:

- The Virginia Tech Site & Infrastructure Development Department shall notify DCR Christiansburg Regional Office of the Responsible Land Disturber (RLD) at least two weeks in advance of land-disturbing activities.
- The information to be provided shall include the name, contact information and certification number of the RLD.

8.0 LONG-TERM MAINTENANCE:

- Project Specific Plan (construction drawings/sheets and narrative) shall contain information on long-term maintenance of BMPs, which will be incorporated into the BMP O&M.
- Virginia Tech shall maintain a BMP GIS

- Virginia Tech will use GIS to track stormwater management facilities, associated treatment areas/zones, and associated watersheds.
 - The Virginia Tech BMP GIS will be updated quarterly with information as related to the BMP.
- Stormwater Pollution Prevent Plans (SWPPPs) shall be made available over the internet.
- Virginia Tech shall inspect and maintain the BMPs in accordance with the approved Plans and VT Annual Standards and Specifications for ESC and SWM.

VirginiaTech



APPENDIX A

PART 1 – PLAN PREPARER'S CHECKLIST

PLAN PREPARER'S CHECKLIST

FOR EROSION AND SEDIMENT CONTROL PLANS

The Erosion and Sediment Control (ESC) Plan consists of the Narrative (including any supporting calculations) and the construction sheets (site plan), as noted below.

GENERAL

_____ Complete set of plans- Include all sheets pertaining to the site grading and stormwater and any activities impacting erosion and sediment control and drainage:

- Existing conditions
- Demolition
- Site grading
- Erosion and sediment control
- Storm sewer systems
- Stormwater management facilities
- Utility layout
- Landscaping
- On-site and off-site borrow and disposal areas that do not have separate approved ESC Plans

_____ Professional's seal - The designer's original seal, signature, and date are required on the *cover* sheet of each Narrative and each set of Plan Sheets. A facsimile is acceptable for subsequent Plan Sheets.

_____ Number of plan sets - Two sets of ESC Plans may be submitted initially. Four sets are required for approval. This office will retain one set of the approved ESC Plan.

_____ Variiances - Variiances requested at the time of plan submission are governed by Section 4VAC50-30-50 of the *Virginia Erosion and Sediment Control Regulations* and Virginia Tech Annual Standards and Specifications for ESC and SWM

_____ Certified Responsible Land Disturber (RLD) - A certified RLD is required during all stages of construction, from the initial land disturbance through final site stabilization. **The name of the project RLD must be provided to this office before any land disturbance may begin.** Notify this office in a timely manner if the RLD changes during the course of the project.

NARRATIVE

_____ Completed Plan Preparer's Checklists - Include a completed *Plan Preparer's Checklist for Erosion and Sediment Control Plans* and a completed *Plan Preparer's Minimum Standard Checklist for Erosion and Sediment Control Plans* in each Narrative.

_____ Project description - Briefly describe the nature and purpose of the land-disturbing activity. Provide the area (acres) to be disturbed. Identify the Owner of the development.

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

_____ Existing site conditions - A description of the existing topography (% slopes), ground cover, and drainage (on-site and receiving channels).

_____ Adjacent areas - A description of all neighboring areas such as residential developments, agricultural areas, streams, lakes, roads, etc., that might be affected by the land disturbance.

_____ Off-site areas - Describe any off-site land-disturbing activities that may occur (borrow sites, disposal areas, easements, etc.). Identify the Owner of the off-site area and the locality responsible for plan review. Include a statement that any off-site land-disturbing activity associated with the project must have an approved ESC Plan. Submit documentation of the approved ESC Plan for each of these sites.

_____ Soils - Provide a description of the soils on the site, giving such information as soil name, mapping unit, erodibility, permeability, surface runoff, and a *brief* description of depth, texture and soil structure. Show the site location on the Soil Survey, if it is available. Include a plan showing the boundaries of each soil type on the development site.

_____ Critical areas - A description of areas on the site that have potentially serious erosion problems or that are sensitive to sediment impacts (e.g., steep slopes, watercourses, wet weather / underground springs, etc.).

_____ Erosion and sediment control measures - A description of the structural and vegetative methods that will be used to control erosion and sedimentation on the site. Controls should satisfy applicable minimum standards and specifications in Chapter 3 of the 1992 *Virginia Erosion and Sediment Control Handbook* (VESCH).

_____ Management strategies / Sequence of construction - Address management strategies, the sequence of construction, and any phasing of installation of ESC measures.

_____ Permanent stabilization - A brief description, including specifications, of how the site will be stabilized after construction is completed.

_____ Maintenance of ESC measures - A schedule of regular inspections, maintenance, and repair of erosion and sediment control structures should be set forth.

_____ Calculations for temporary erosion and sediment control measures - For each temporary ESC measure, provide the calculations required by the standards and specifications.

_____ Stormwater management considerations - Will the development of the site cause an increase in peak runoff rates? Will the increase in runoff cause flooding or channel degradation downstream? Describe the strategy to control stormwater runoff:

- Provide exhibits showing the drainage divides, the direction of flow, and the size (acreage) of each of the site drainage areas that discharge runoff off-site, both existing and proposed.
- Provide calculations for pre- and post-development runoff from these drainage areas.
- Ensure that Minimum Standard 19 is satisfied for each off-site receiving channel, including those that receive runoff from stormwater management facilities.
- Provide calculations for the design of each permanent stormwater management facility.

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

- Ensure that increased volumes of sheet flows are diverted to a stable outlet, to an adequate channel, pipe or pipe system, or to a stormwater management facility.
- Provide adequacy calculations (capacity and erosion resistance) for all on-site stormwater conveyances in accordance with the next checklist item.

_____ Calculations for permanent stormwater conveyances - For each permanent stormwater conveyance or structure, provide the following design calculations, as applicable:

- Drainage area map with time of concentration (T_C) path shown
- T_C calculation/nomograph
- Locality IDF curve
- Composite runoff coefficient or RCN calculation
- Peak runoff calculations
- Stormwater conveyance channel design calculations
- Storm drain and storm sewer system design calculations
- Hydraulic Grade Line if any pipe in the system is more than 90% full for a 10-year storm
- Culvert design calculations
- Drop inlet backwater calculations
- Curb inlet length calculations

_____ Maintenance of SWM Facilities – Provide a table with following for each permanent stormwater management facility:

- A description of the requirements for maintenance of the facility and a recommended schedule of inspection and maintenance.
- The identification of the person or persons who will be responsible for maintenance.

_____ Water Quality – Is the plan in compliance with the water quality criteria (4VAC50-60-60)? Provide supporting calculations. For each best management practice with a checklist, include a completed Design and Plan Review Checklist from Appendix 3 of the *Virginia Stormwater Management Handbook*.

_____ Stream Channel Erosion – Is the plan in compliance with the stream channel erosion criteria (4VAC50-60-70)?

_____ Outfall Stability – Per MS-19, has the issue of outfall stability been appropriately addressed?

_____ Flooding – Is the plan in compliance with the flooding criteria (4VAC50-60-80)?

_____ Specifications for erosion and sediment control measures - For each erosion and sediment control measure employed in the plan, include in the Narrative at a minimum the following sections from the standard and specification in the VESCH: Construction Specifications, Installation, and Maintenance. Include any approved variances or revisions to the standards and specifications.

_____ Specifications for stormwater and stormwater management structures - Provide specifications for stormwater and stormwater management structures, i.e., pipe materials, pipe bedding, stormwater structures.

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

_____ Page numbers – Number the pages of the Narrative and the Calculations.

_____ General Information – Narrative contains project specific information, and where appropriate general information has been modified to represent the project specific information and situation.

SITE PLAN

_____ Vicinity map - A small map locating the site in relation to the surrounding area. Include any landmarks that might assist in locating the site.

_____ Indicate north - The direction of north in relation to the site.

_____ Off-site areas - Include any off-site land-disturbing activities (e.g., borrow sites, disposal areas, etc.) not covered by a separate approved ESC Plan.

_____ Erosion and sediment control notes - At a minimum, include the erosion and sediment control notes found in Table 6-1 on page VI-15 of the 1992 *Virginia Erosion and Sediment Control Handbook*. Note that the Virginia Erosion and Sediment Control Regulations are found in section "4VAC50-30" of the Code of Virginia. Ensure that all applicable Minimum Standards not covered elsewhere in the plan have been addressed. Include a note that any off-site land-disturbing activity associated with the project must have an approved ESC Plan.

_____ Minimum Standards – Minimum Standard 1 through Minimum Standard 19 shall be included in the plan set.

_____ Legend - Provide a complete listing of all ESC measures used, including the VESCH uniform code symbol and the standard and specification number. Include any other items necessary to identify pertinent features in the plan.

_____ Property lines and easements - Show all property and easement lines. For each adjacent property, list the deed book and page number and the property owner's name and address.

_____ Existing vegetation - The existing tree lines, grassed areas, or unique vegetation.

_____ Limits of clearing and grading – Delineate all areas that are to be cleared and graded.

_____ Protection of areas not being cleared - Fencing or other measures to protect areas that are not to be disturbed on the site.

_____ Critical areas – Note all critical areas on the plan.

_____ Existing contours - The existing contours of the site.

_____ Final contours and elevations - Changes to the existing contours, including final drainage patterns. Note the finished floor elevation (FFE) of all buildings on site, including basements.

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

VirginiaTech



APPENDIX A

PART 2 – PLAN PREPARER'S MINIMUM STANDARD CHECKLIST

PLAN PREPARER'S MINIMUM STANDARD CHECKLIST

FOR EROSION AND SEDIMENT CONTROL PLANS

Minimum Standards - All Minimum Standards must be addressed.

This project complies with the Virginia Tech Annual Standards and Specifications for ESC and SWM dated: _____

Yes No NA

- | | | | | | |
|--------------------------|--------------------------|--------------------------|------|--|---|
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | All Minimum Standards have been listed on a construction sheet. |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-1 | | Have temporary and permanent stabilization been addressed in the narrative? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Are practices shown on the plan? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Temporary and permanent seed specifications? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Lime and fertilizer? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Mulching? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Blankets/Matting? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Pavement/Construction Road Stabilization? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-2 | | Has stabilization of soil stockpiles, borrow areas, and disposal areas been addressed in the narrative and on the plan? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | Have sediment trapping measures been provided? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-3 | | Has the establishment and maintenance of permanent vegetative stabilization been addressed? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-4 | | Does the plan specifically state that sediment-trapping facilities shall be constructed as a first step in land-disturbing activities? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-5 | | Does the plan specifically state that stabilization of earthen structures is required immediately after installation? Is this noted for each measure on the plan? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-6 | | Are sediment traps and sediment basins specified where needed and designed to the standard and specification? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-7 | | Have the design and temporary/permanent stabilization of cut and fill slopes been adequately addressed? Is Surface Roughening provided for slopes steeper than 3:1? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-8 | | Have adequate temporary or permanent conveyances (paved flumes, channels, slope drains) been provided for concentrated stormwater runoff on cut and fill slopes? |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | MS-9 | | Has water seeping from a slope face been addressed (e.g., subsurface drains)? |

PROJECT NAME: _____ SUBMITTAL#: _____

PLANS DATED: _____ NARRATIVE DATED: _____

Yes No NA

- MS-10** Is adequate inlet protection provided for all operational storm drain and culvert inlets?
- MS-11** Are adequate outlet protection and/or channel linings provided for all stormwater conveyance channels and receiving channels? Is there a schedule indicating:
 Dimensions of the outlet protection? Lining? Size of riprap?
 Cross section and slope of the channels? Type of lining? Size of riprap, if used?
- MS-12** Are in-stream protection measures required so that channel impacts are minimized?
- MS-13** Are temporary stream crossings of non-erodible material required where applicable?
- MS-14** Are all applicable federal, state and local regulations pertaining to working in or crossing live watercourses being followed?
- MS-15** Has immediate restabilization of areas subject to in-stream construction (bed and banks) been adequately addressed?
- MS-16** Have disturbances from underground utility line installations been addressed?
 No more than 500 linear feet of trench open at one time?
 Effluent from dewatering filtered or passed through a sediment-trapping device?
 Proper backfill, compaction, and restabilization?
- MS-17** Is the transport of soil and mud onto public roadways properly controlled? (i.e., Construction Entrances, wash racks, transport of sediment to a trapping facility, cleaning of roadways at the end of each day, no washing before sweeping and shoveling)
- MS-18** Has the removal of temporary practices been addressed?
 Have the removal of accumulated sediment and the final stabilization of the resulting disturbed areas been addressed?
- MS-19** Are properties and waterways downstream from development adequately protected from sediment deposition, erosion, and damage due to increases in volume, velocity and peak flow rate of stormwater runoff? Have adequate channels been provided on-site? Has storm drain outfall stability been evaluated?
- Variances requested at the time of plan submission are governed by Section 4VAC50-30-50 of the *Virginia Erosion and Sediment Control Regulations*.**
- Have variances been appropriately included in the narrative and construction sheets (drawings)?**

 Print

 Professional's Signature

 Date

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

_____ Site development - All improvements such as buildings, parking lots, access roads, utility construction, etc. Show all physical items that could affect or be affected by erosion, sediment, and drainage.

_____ Adequate Conveyances – Ensure that stormwater conveyances with adequate capacity and adequate erosion resistance have been provided all on-site concentrated stormwater runoff. Off-site channels that receive runoff from the site, including those receiving runoff from stormwater management facilities, must be adequate. Increased volumes of sheet flows must be diverted to a stable outlet, adequate channel, pipe or pipe system, or a stormwater management facility.

_____ Location of practices - The locations of erosion and sediment control and stormwater management practices used on the site. Use the standard symbols and abbreviations in Chapter 3 of the VESCH.

_____ Direction of Flow for Conveyances - Indicate the direction of flow for all stormwater conveyances (storm drains, stormwater conveyance channels).

_____ Maintenance - A schedule of regular inspections, maintenance, and repair of temporary erosion and sediment control structures and permanent stormwater management facilities should be set forth.

_____ Storm Drain Profiles - Provide profiles of all storm drains except roof drains. If the type of pipe (RCP, CMP, HDPE, etc.) is not called out on the profiles, then the most conservative pipe material that may be specified for the project must be used in the adequacy calculations.

_____ Detail drawings - Any structural practices used that are not found in the VESCH or approved annual agency specifications should be described and illustrated with detail drawings.

_____ Details and Standards – The details and standards are modified to represent the project specific situation. Generalities have been removed, and project specific information has been included in the details and standards. Dimensions have been added to the details.

_____ Variations – The details and standards are modified to represent the project specific situation. Generalities have been removed, and project specific information has been included in the details and standards. Variations approved as part of the annual standards and specifications have been appropriately included in the Plan.

Print

Professional's Signature

Date

PROJECT NAME: _____ **SUBMITTAL#:** _____

PLANS DATED: _____ **NARRATIVE DATED:** _____

VirginiaTech



APPENDIX B

PLAN PREPARER'S CHECKLIST
FOR
STORMWATER MANAGEMENT PLANS

PLAN PREPARER'S CHECKLIST

FOR STORMWATER MANAGEMENT PLANS

Y	N	N/A	
			A. Determination of flooding and channel erosion impacts to receiving streams due to land-disturbing activities shall be measured at each point of discharge from the land disturbance and such determination shall include any runoff from the balance of the watershed which also contributes to that point of discharge.
			B. The specified design storms shall be defined as either a 24-hour storm using the rainfall distribution recommended by the U.S. Department of Agriculture's Natural Resources Conservation Service (NRCS) when using NRCS methods or as the storm of critical duration that produces the greatest required storage volume at the site when using a design method such as Modified Rational Method.
			C. For purposes of computing runoff, all pervious lands in the site shall be assumed prior to development to be in good condition (if the lands are pastures, lawns, or parks), with good cover (if the lands are woods), or with conservation treatment (if the lands are cultivated); regardless of conditions existing at the time of computation.
			D. Construction of stormwater management facilities or modifications to channels shall comply with all applicable laws and regulations. Evidence of approval of all necessary permits shall be presented.
			E. Impounding structures that are not covered by the Impounding Structure Regulations (4VAC50-20) shall be engineered for structural integrity during the 100-year storm event.
			F. Pre-development and post-development runoff rates shall be verified by calculations that are consistent with good engineering practices.
			G. Outflows from a stormwater management facility or stormwater conveyance system, shall be discharged to an adequate channel.
			H. Proposed residential, commercial, or industrial subdivisions shall apply these stormwater management criteria to the land disturbance as a whole. Individual lots in new subdivisions shall not be considered separate land-disturbing activities, but rather the entire subdivision shall be considered a single land development project. Hydrologic parameters shall reflect the ultimate land disturbance and shall be used in all engineering calculations.

Y	N	N/A	
			I. All stormwater management facilities shall have an inspection and maintenance plan that identifies the owner and the responsible party for carrying out the inspection and maintenance plan.
			J. Construction of stormwater management impoundment structures within a Federal Emergency Management Agency (FEMA) designated 100-year floodplain shall be avoided to the extent possible. When this is unavoidable, all stormwater management facility construction shall be in compliance with all applicable regulations under the National Flood Insurance Program, 44CFR Part 59.
			K. Natural channel characteristics shall be preserved to the maximum extent practicable.
			L. Land-disturbing activities shall comply with the Virginia Erosion and Sediment Control Law (10.1-560 et seq. of the Code of Virginia) and attendant regulations.
			M. Flood control and stormwater management facilities that drain or treat water from multiple development projects or from a significant portion of a watershed may be allowed in Resource Protection Areas defined in the Chesapeake Bay Preservation Act, provided that (i) the local government has conclusively established that the location of the facility within the Resource Protection Area is the optimum location; (ii) the size of the facility is the minimum necessary to provide necessary flood control, stormwater treatment, or both; and, (iii) the facility must be consistent with a stormwater management program that has been approved by the board.

Water Quality			
Y	N	N/A	
			A. Compliance with the water quality criteria may be achieved by applying the performance-based criteria or the technology-based criteria to either the site or a planning area.
			B. Performance-based criteria. For land-disturbing activities, the calculated post-development nonpoint source pollutant runoff load shall be compared to the calculated pre-development load based upon the average land cover condition or the existing site condition. A BMP shall be located, designed, and maintained to achieve the target pollutant removal efficiencies specified in Table 1 to effectively reduce the pollutant load to the required level based upon the following four applicable land development situations for which the performance criteria apply:
			<p>1. Situation 1 consists of land-disturbing activities where the existing percent impervious cover is less than or equal to the average land cover condition and the proposed improvements will create a total percent impervious cover which is less than the average land cover condition.</p> <p>Requirement: No reduction in the after disturbance pollutant discharge is required</p>
			<p>2. Situation 2 consists of land-disturbing activities where the existing percent impervious cover is less than or equal to the average land cover condition and the proposed improvements will create a total percent impervious cover which is greater than the average land cover condition.</p> <p>Requirement: The pollutant discharge after disturbance shall not exceed the existing pollutant discharge based on the average land cover condition.</p>
			<p>3. Situation 3 consists of land disturbing activities where the existing percent impervious cover is greater than the average land cover condition.</p> <p>Requirement: The pollutant discharge after disturbance shall not exceed (i) the pollutant discharge based on existing conditions less 10% or (ii) the pollutant discharge based on the average land cover condition, whichever is greater.</p>
			<p>4. Situation 4 consists of land disturbing activities where the existing percent impervious cover is served by an existing stormwater management BMP that addresses water quality.</p> <p>Requirement: The pollutant discharge after disturbance shall not exceed the existing pollutant discharge based on the existing percent impervious cover while served by the existing BMP. The existing BMP shall be shown to have been designed and constructed in accordance with proper design standards and specifications, and to be in proper functioning condition.</p>

Water Quality (con't)			
Y	N	N/A	
			<p>C. Technology-based criteria. For land-disturbing activities, the post-developed stormwater runoff from the impervious cover shall be treated by an appropriate BMP as required by the post-developed condition percent impervious cover as specified in Table 1. The selected BMP shall be located, designed, and maintained to perform at the target pollutant removal efficiency specified in Table 1. Design standards and specifications for the BMPs in Table 1 that meet the required target pollutant removal efficiency will be available at the department.</p>

Water Quality BMP*	Target Phosphorus Removal Efficiency	Percent Impervious Cover
Vegetated filter strip	10%	16-21%
Grassed swale	15%	16-21%
Constructed wetlands	20%	22-37%
Extended detention (2 x WQ Vol)	35%	22-37%
Retention basin I (3 x WQ Vol)	40%	22-37%
Bioretention basin	50%	38-66%
Bioretention filter	50%	38-66%
Extended detention-enhanced	50%	38-66%
Retention basin II (4 x WQ Vol)	50%	38-66%
Infiltration (1 x WQ Vol)	50%	38-66%
Sand filter	65%	67-100%
Infiltration (2 x WQ Vol)	65%	67-100%
Retention basin III (4 x WQ Vol with aquatic bench)	65%	67-100%

Stream Channel Erosion			
Y	N	N/A	
			A. Properties and receiving waterways downstream of any land-disturbing activity shall be protected from erosion and damage due to changes in runoff rate of flow and hydrologic characteristics, including but not limited to, changes in volume, velocity, frequency, duration, and peak flow rate of stormwater runoff in accordance with the minimum design standards set out in this section.
			B. In addition to subsections B and C of this section permit-issuing authorities, by local ordinance may, or the board by state regulation may, adopt more stringent channel analysis criteria or design standards to ensure that the natural level of channel erosion, to the maximum extent practicable, will not increase due to the land-disturbing activities. These criteria may include, but are not limited to, the following:
			1. Criteria and procedures for channel analysis and classification.
			3. Procedures for channel data collection.
			4. Criteria and procedures for the determination of the magnitude and frequency of natural sediment transport loads.
			5. Criteria for the selection of the proposed natural or man-made linings.

Flooding			
Y	N	N/A	
			A. Downstream properties and waterways shall be protected from damages from localized flooding due to changes in runoff rate of flow and hydrologic characteristics, including but not limited to, changes in volume, velocity, frequency, duration, and peak flow rate of stormwater runoff in accordance with the minimum design standards set out in this section.
			B. The 10-year post-developed peak rate of runoff from the development site shall not exceed the 10-year pre-developed peak rate of runoff.
			C. In lieu of subsection B of this section, localities may, by ordinance, adopt alternate design criteria based upon geographic, land use, topographic, geologic factors or other downstream conveyance factors as appropriate.
			D. Linear development projects shall not be required to control post-developed stormwater runoff for flooding, except in accordance with a watershed or regional stormwater management plan.

Print

Professional's Signature

Date

VirginiaTech



APPENDIX B

PART 2

PLAN PREPARER'S CHECKLIST
FOR
DETENTION, RETENTION, AND IMPOUNDMENT BMPS

Design and Plan Review Checklist

Page 1 of 7

Applicant: _____ **Phone No.:** _____
Designer: _____ **Phone No.:** _____
Project Name: _____
Location: _____
Type of Facility and Identification No.: _____

Plan status:
 _____ approved
 _____ not approved

Legend: • - Complete
 Inc. - Incomplete/Incorrect
 N/A - Not Applicable

I. SUPPORTING DATA

_____ Narrative describing stormwater management strategy including all assumptions made in the design.

A. Drainage Area Map

- _____ Site and drainage area boundaries
- _____ Off-site drainage areas
- _____ Pre- and post-developed land uses with corresponding acreage
- _____ Pre- and post-developed time of concentration flow paths
- _____ Existing and proposed topographic features
- _____ Drainage area appropriate for BMP

B. Soils Investigation

- _____ Soils map with site and drainage area outlined
- _____ Geotechnical report with recommendations and earthwork specifications
- _____ Boring locations
 - _____ Borrow area
 - _____ Basin pool area
 - _____ Embankment area: centerline principal spillway, emergency spillway , abutments
- _____ Boring logs with Unified Soils Classifications, soil descriptions, depth to seasonal high groundwater table, depth to bedrock, etc.
- _____ Compaction requirements specified
- _____ Additional geophysical investigation and recommendations in Karst environment

Design and Plan Review Checklist

Page 2 of 7

II. COMPUTATIONS

A. Hydrology

- _____ Runoff curve number determinations: pre- and post-developed conditions, with worksheets.
- _____ Time of concentration: pre- and post-developed conditions, with worksheets.
- _____ Hydrograph generation: pre- and post-developed condition for appropriate design and safety storms (SCS methods or modified rational-critical storm duration method)

B. Hydraulics

- _____ Specify assumptions and coefficients used.
- _____ Stage-storage table and curve
- _____ Riser structure and barrel
 - _____ Weir/orifice control analysis for riser structure discharge openings
 - _____ Weir/orifice control analysis for riser crest
 - _____ Barrel: inlet/outlet control analysis
 - _____ Riser/Outlet Structure flotation analysis (factor of safety = 1.25 min.).
 - _____ Anti-seep collar or filter diaphragm design.
 - _____ Outlet protection per VE&SCH Std.. & Spec. 3.18.
 - _____ Provisions for use as a temporary sediment basin riser with clean out schedule & instructions for conversion to a permanent facility.
- _____ Emergency spillway adequacy/capacity analysis with required embankment freeboard.
- _____ Stage - discharge table and curve (provide equations & cite references).
- _____ Storm drainage & hydraulic grade line calculations.
- _____ Reservoir routing of post-development hydrographs for appropriate design storms (2-yr., 10-yr., or as required by watershed conditions) & safety storms (100-yr. or as required).

C. Downstream impacts

- _____ Danger reach study.
- _____ 100 year floodplain impacts.
- _____ "Adequate channel" calculations for receiving channel
- _____ Provide downstream hydrographs at critical study points.
- _____ Storm drainage plans for site areas not draining to BMP
 - _____ Safe conveyance - MS-19
 - _____ Areas compensated for in water quality performance-based criteria calculations

Design and Plan Review Checklist

Page 3 of 7

D. Water Quality

- Impervious cover tabulation
- Technology-based criteria: proper selection of BMP based on impervious cover
- Performance-based criteria: pre- and post-developed pollutant load and pollutant removal requirement calculations (provide worksheets)
- Water quality volume for retention basin I, II, or III permanent pool
- Water quality volume for ext. detention and ext. detention enhanced with drawdown calculations
- Proper surface area/depth allocations for permanent pool/shallow marsh/constructed wetland
- Constructed stormwater wetland / shallow marsh
 - Adequate drainage area and/or base flow
 - Adequate pool volume
 - Adequate surface area
 - Allocation of surface area to depth zones
 - Maximum ponding depth over pool surface specified

III. PLAN REQUIREMENTS

A. General Items

- Plan view drawn at 1"=50' or less (40', 30', etc.)
- North arrow
- Legend
- Location plan and vicinity map
- Property lines
- Existing & proposed contours (2' contour interval min.)
- Existing features & proposed improvements (including utilities and protective measures)
- Locations of test borings
- Earthwork specifications
- Construction sequence for SWM basin and E&S controls
- Temporary erosion & sediment control measures
- Conveyance of base flow during construction
- Temporary and permanent stabilization requirements
 - Emergency spillway
 - Basin side slopes

Design and Plan Review Checklist

Page 4 of 7

- Basin bottom
- Delineation of FEMA 100 year floodplain
- Plans sealed by a qualified licensed professional

B. BMP Plan Views

- Dimensions of basin features: perm. Pool, sediment forebay, embankment, etc.
- Location of all conveyance system outfalls into basin
 - Proper orientation to avoid short circuiting
 - Outlet protection per VE&SCH
- Top of bank & basin bottom elevations
- Elevations of permanent pool, water quality volume and max. design water surface elevations for all appropriate design storms and safety storms
- Side slope (H:V) of basin storage area and embankment (upstream and downstream slopes)
- Proper length-to-width ratio as specified in BMP design criteria
- Pervious** low flow channel
- Sediment forebay
- Basin bottom slope
- Maintenance access to sediment forebay, riser structure, and one side of the basin ponding area
- Peripheral ledge for safety
- Aquatic Bench
- Shoreline protection
- Safety fence
- Riser and barrel materials and dimensions labeled
- Constructed stormwater wetland / shallow marsh
 - Basin liner specifications
 - Pool depth zones identified on plan
 - Pool geometry - wet/dry weather flow path

Design and Plan Review Checklist

Page 5 of 7

C. BMP - Section Views & Related Details

1. Embankment (or dam) and Ponding Areas

- Elevations of permanent pool, water quality volume and max. design water surface elevations for all appropriate design storms and safety storms
- Top of dam elevations- constructed height and settled height (10% settlement).
- Adequate freeboard
- Top width labeled
- Elevation of crest of emergency spillway
- Emergency spillway w/ side slopes labeled.
- Emergency spillway inlet, level, and outlet sections labeled
- Existing ground and proposed improvements profile along center line of embankment
- Existing ground and proposed improvements profile along center line of principal spillway
- Typical grading section through pond including typical side slopes with aquatic bench, safety ledge, shoreline protection, etc.
- Existing ground and proposed improvements along center line of emergency spillway
- Dimensions of zones for zoned embankment

2. Seepage Control

- Impervious lining
- Phreatic line (4:1 slope measured from the principal spillway design high water).
 - a. Anti-seep Collar
 - Anti-seep collar (detail reqd.).
 - Size (based upon 15% increase in seepage length).
 - Spacing & location on barrel (at least 2' from pipe joint).
 - b. Filter Diaphragm
 - Design certified by a professional geotechnical engineer.

3. Foundation Cut Off Trench or Key Trench

- Materials labeled
- Bottom width (4' min. or greater per geotech. report).
- Side slopes labeled (1:1 max. steepness).
- Depth (4' min. or as specified in geotechnical report)

Design and Plan Review Checklist

Page 6 of 7

4. Multi Stage Riser and Barrel System

- Materials labeled
- Bedding or cradle details provided
- Gauge & corrugation size for metal pipes specified
- Barrel diameter, inverts, and slope (%) labeled
- Outlet protection per VESCH, Std. & Spec. 3.18, 3.19 w/ filter cloth underlayment
- Crest elevation of riser structure shown
- Inverts and dimensions of control release orifices/weirs shown
- Structure dimensions shown
- Control orifice/weir dimensions shown
- Extended detention orifice protection (detail required for construction)
- Riser trash rack or screen (detail reqd.. for construction).
- Riser anti-vortex device (detail reqd.. for construction).
- Proper riser structure footing.
- Access to riser structure interior for maintenance.
- Basin drain pipe

D. Landscape Plan

- Planting schedule and specifications (transport / storage / installation / maintenance)
- Plant selection for planting zones 1 thru 6
- Preservation measures for existing vegetation
- Top soil / planting soil included in final grading

E. Maintenance Items

- Person or organization responsible for maintenance.
- Maintenance narrative which describes the long-term maintenance requirements of the facility and all components.
- Facility access from public R/W or roadway.
- Maintenance easement.

VirginiaTech



APPENDIX C

Erosion & Sediment Control and Stormwater Management
Construction Site Inspection Form

Erosion & Sediment Control and Stormwater Management Construction Site Inspection Report

General Information			
Project Name & VT Work Order No.:		Location:	Blacksburg, Virginia
Date of Inspection:	12/6/2011	Start/End Time:	
Contact Information/Responsible Parties			
Responsible Land Disturber:		RLD Phone #:	
VT Project Manager:		VT PM Phone #:	
Inspector's Name(s):		Inspector Phone #:	540-231-9097
All non-compliance issues to be resolved within 7 days from the date of the inspection unless otherwise noted. **The RLD is responsible for the management and maintenance of all site erosion and stormwater controls.**			
Stage of Construction			
Pre-Construction Conference <input type="checkbox"/> Clearing & Grubbing <input type="checkbox"/> Construction <input type="checkbox"/> Finish Grading <input type="checkbox"/> Final Stabilization <input type="checkbox"/> Construction of SWM Facilities <input type="checkbox"/> Other _____ <input type="checkbox"/>			
Weather Information			
Type of Inspection: <input type="checkbox"/> Regular <input type="checkbox"/> Pre-storm event <input type="checkbox"/> During storm event <input type="checkbox"/> Post-storm event			
Has there been a storm event since the last inspection? <input type="checkbox"/> Yes* <input type="checkbox"/> No *If yes, see rainfall data attached to this report.			
Weather at time of this inspection? Temperature:			
<input type="checkbox"/> Clear <input type="checkbox"/> Cloudy <input type="checkbox"/> Rain <input type="checkbox"/> Sleet <input type="checkbox"/> Fog <input type="checkbox"/> Snowing <input type="checkbox"/> High Winds <input type="checkbox"/> Other:			
Are there any indications of stormwater discharges prior to or at time of inspection? <input type="checkbox"/> Yes <input type="checkbox"/> No Are there any indications of off-site damage? <input type="checkbox"/> Yes <input type="checkbox"/> No Is more than approximately 50% of the project site disturbed? <input type="checkbox"/> Yes <input type="checkbox"/> No If yes, describe:			
Have previous violation(s) been corrected: <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A			
❖ No post-construction BMPs were inspected as part of this inspection.	❖ Certification of post-construction BMPs to be provided by others.	❖ No physical surveys have been conducted as part of this inspection report.	

The required corrective action deadline date applies to all violations noted on this report. If listed violation(s) currently constitute non-compliance and/or required corrective actions are not completed by the deadline, a **NOTICE TO COMPLY, STOP WORK ORDER**, and/or other enforcement actions may be issued to the entity responsible for ensuring compliance on the above project.

Inspector's Name: _____

Signature: _____ Date: _____

Required Corrective Action Deadline Date: _____ Re-inspection Date: _____

Date/Initials: _____

1. Refers to applicable regulation found in the most recent publication of the *Virginia Erosion and Sediment Control Regulations* (4VAC50-30), *Virginia Stormwater Management Permit Regulations* (4VAC50-60), or Annual Standards and Specifications for ESC & SWM
2. Non-compliance – number of times in which the item has been reported as a violation.

Revision: 10/21/2011

	Non-Compliance	BMP	BMP Installed	Maintenance Required	Description and Location of Problem/Violation ¹ , Required or Recommended Corrective Actions, and Other Comments/Notes
1			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
2			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
3			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
4			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
5			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
6			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
7			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
8			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	

Date/Initials: _____

	Non-Compliance	BMP	BMP Installed	Maintenance Required	Description and Location of Problem/Violation ¹ , Required or Recommended Corrective Actions, and Other Comments/Notes
Corrective Action Taken:					
9			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
10			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
11			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
10			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					

Date/Initials: _____

Overall Site Issues

	BMP/activity	Implemented?	Maintenance Required?	Description and Location of Problem/Violation¹, Required or Recommended Corrective Actions, and Other Comments/Notes
1	Are all slopes and disturbed areas not actively being worked properly stabilized?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
2	Are natural resource areas (e.g., streams, wetlands, mature trees, etc.) protected with barriers or similar BMPs?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
3	Are perimeter controls and sediment barriers adequately installed (keyed into substrate) and maintained?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
4	Are discharge points and receiving waters free of any sediment deposits?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
5	Are storm drain inlets properly protected?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
6	Is the construction entrance/exit preventing sediment from being tracked into the street?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
7	Is trash/litter from work areas collected and placed in covered dumpsters?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
11	Are non-stormwater discharges (e.g., wash water, dewatering) properly controlled?	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
12	Are public roads cleaned as required	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	
14	Is material leaving the site or being brought onto the site? If yes, explain.	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A	<input type="checkbox"/> Yes <input type="checkbox"/> No	

Vault Webpage Access Information:

Web Address: <http://198.82.142.212/AutodeskDM/webclient>

User Name: VTProjects
Password: Hokies (case sensitive)
Server: 198.82.142.212
Database: SIDVault

VirginiaTech



APPENDIX D

Stormwater Construction Site Inspection Report

Stormwater Construction Site Inspection Report

General Information			
Project Name & VT Work Order No.:			
VAR10 Permit No.:		Location:	Blacksburg, VA
Date of Inspection:	12/6/2011	Start/End Time:	
Contact Information/Responsible Parties			
Contractor (GC/CM):		GC Phone #:	
Responsible Land Disturber:		RLD Phone #:	
VT Project Manager:		VT PM Phone #:	
Inspector's Name(s):		Inspector Phone #.	(540) 231-9097
<p style="text-align: center;">**All non-compliance issues to be resolved within 7 days from the date of the inspection unless otherwise noted.**</p> <p style="text-align: center;">**The Contractor is responsible for the management and maintenance of SWPPP.**</p> <p style="text-align: center;">**The RLD is responsible for the management and maintenance of all site erosion and stormwater controls.**</p>			
Stage of Construction			
Pre-Construction Conference <input type="checkbox"/> Clearing & Grubbing <input type="checkbox"/> Construction <input type="checkbox"/> Finish Grading <input type="checkbox"/> Final Stabilization <input type="checkbox"/> Construction of SWM Facilities <input type="checkbox"/> Other _____ <input type="checkbox"/>			
Weather Information			
Type of Inspection: <input type="checkbox"/> Regular <input type="checkbox"/> Pre-storm event <input type="checkbox"/> During storm event <input type="checkbox"/> Post-storm event			
Has there been a storm event since the last inspection? <input type="checkbox"/> Yes* <input type="checkbox"/> No *If yes, see rainfall data attached to this report.			
Weather at time of this inspection? Temperature: _____ <input type="checkbox"/> Clear <input type="checkbox"/> Cloudy <input type="checkbox"/> Rain <input type="checkbox"/> Sleet <input type="checkbox"/> Fog <input type="checkbox"/> Snowing <input type="checkbox"/> High Winds <input type="checkbox"/> Other: _____			
Are there any indications of stormwater discharges prior to or at time of inspection? <input type="checkbox"/> Yes <input type="checkbox"/> No Are there any indications of off-site damage? <input type="checkbox"/> Yes <input type="checkbox"/> No Is more than approximately 50% of the project site disturbed? <input type="checkbox"/> Yes <input type="checkbox"/> No If yes, describe: _____			
Have previous violation(s) been corrected: <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A			
❖ No post-construction BMPs were inspected as part of this inspection.	❖ Certification of post-construction BMPs to be provided by others.	❖ No physical surveys have been conducted as part of this inspection.	

CERTIFICATION STATEMENT

I certify under penalty of law that I performed the inspections and, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I have read and understand the SWPPP and the SWPPP portion of the General Permit for Discharge of Stormwater from Construction Activities. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations and falsifying inspections (reports).

Inspector's Name: _____

Signature: _____ Date: _____

Date/Initials: _____

 Refers to applicable regulation found in the most recent publication of the *Virginia Erosion and Sediment Control Regulations* (4VAC50-30), *Virginia Stormwater Management Permit Regulations* (4VAC50-60), or Annual Standards and Specifications for ESC & SWM

- I. Non-compliance – number of times in which the item has been reported as a violation.

Revision: 10/21/2011

	Non-Compliance	BMP	BMP Installed	Maintenance Required	Description and Location of Problem/Violation ¹ , Required or Recommended Corrective Actions, and Other Comments/Notes
1			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
2			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
3			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
4			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
5			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
6			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
7			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
8			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					

Date/Initials: _____

	Non-Compliance	BMP	BMP Installed	Maintenance Required	Description and Location of Problem/Violation ¹ , Required or Recommended Corrective Actions, and Other Comments/Notes
9			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
10			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
11			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					
10			<input type="checkbox"/> Y <input type="checkbox"/> N	<input type="checkbox"/> Y <input type="checkbox"/> N	
Corrective Action Taken:					

Date/Initials: _____

Overall Site Issues
Below are some general site issues that should be assessed during inspections. Customize this list as needed for conditions at your site.

	BMP/activity	Implemented?	Maintenance Required?	Description and Location of Problem/Violation¹, Required or Recommended Corrective Actions, and Other Comments/Notes
1	Are all slopes and disturbed areas not actively being worked properly stabilized?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
2	Are natural resource areas (e.g., streams, wetlands, mature trees, etc.) protected with barriers or similar BMPs?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
3	Are perimeter controls and sediment barriers adequately installed (keyed into substrate) and maintained?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
4	Are discharge points and receiving waters free of any sediment deposits?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
5	Are storm drain inlets properly protected?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
6	Is the construction entrance/exit preventing sediment from being tracked into the street?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
7	Is trash/litter from work areas collected and placed in covered dumpsters?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
8	Are washout facilities (e.g., paint, stucco, concrete) available, clearly marked, and maintained?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
9	Are vehicle and equipment fueling, cleaning, and maintenance areas free of spills, leaks, or any other deleterious material?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
10	Are materials that are potential stormwater contaminants stored inside or under cover?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	

Date/Initials: _____

	BMP/activity	Implemented?	Maintenance Required?	Description and Location of Problem/Violation ¹ , Required or Recommended Corrective Actions, and Other Comments/Notes
11	Are non-stormwater discharges (e.g., wash water, dewatering) properly controlled?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
12	Are public roads cleaned as required	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
13	Major grading log on site and maintained?	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	
14	Is material leaving the site or being brought onto the site? If yes, explain.	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Yes <input type="checkbox"/> No	

	YES	NO
Copy of Permit on site		
Copy of permit coverage letter		
Approved ESC plan on site		

	YES	NO
SWPPP on site		
SWPPP signed		
Approved SWM plan on site		

	YES	NO	N/A
Has web address for SWPPP been displayed at entrance of site?			
Has Coverage Letter been displayed at entrance of site?			
Has the Amendment Log in SWPPP been updated since last report?			
Has the Grading Log in SWPPP been updated since last report?			
Has the Corrective Action Log in SWPPP been updated since last report?			
Has all SWPPP information been updated on the Vault webpage?			

Vault Webpage Access Information:

 Web Address: <http://198.82.142.212/AutodeskDM/webclient/>

 User Name: VTProjects
 Password: Hokies (case sensitive)
 Server: 198.82.142.212
 Database: SIDVault

Date/Initials: _____

Additional Non-Compliance Violations

Describe any incidents of non-compliance not described above (write none if there are no additional incidents of non-compliance):

CERTIFICATION STATEMENT

I certify the site is in compliance or non-compliance (circle if correct) with the SWPPP and the General Permit for Discharge of Stormwater from Construction Activities.

“I certify under the penalty of law that I have read and understand this document and that this document and all attachments were prepared in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.”

Print name and title: _____

Signature: _____ Date: _____

VirginiaTech



APPENDIX E

Proposed Land-disturbing Activities

VirginiaTech



APPENDIX F

Past and Current Land-disturbing Activities

VirginiaTech



APPENDIX G

Variance Request Form

VARIANCE REQUEST

Requested by: _____ Date: _____

Street Address: _____

City/Town/Zip: _____

Telephone #: _____ Fax #: _____

E-mail address: _____

Project Name/Location: _____

Project Description: _____

Variance requested for (state appropriate minimum standard & requirement): _____

Reasons/Justification for Variance Request and Specific Site Conditions Necessitating the Request: _____

Designers Signature: _____ Date: _____

Signature of applicant: _____ Date: _____

VirginiaTech



APPENDIX H

Exception Request Form

EXCEPTION REQUEST

Requested by: _____ **Date:** _____

Street Address: _____

City/Town/Zip: _____

Telephone #: _____ **Fax #:** _____

E-mail address: _____

Project Name/Location: _____

Project Description: _____

Exception requested for (state appropriate standard & requirement): _____

Reasons/Justification for Exception Request and Specific Site Conditions Necessitating the Request: _____

Mitigating Measures: _____

Designers Signature: _____ **Date:** _____

Signature of applicant: _____ **Date:** _____

VirginiaTech



APPENDIX I

Plan Reviewer Checklist

PLAN REVIEW CHECKLIST

_____ Annual Standards and Specifications – The ESC/SWM Plan clearly indicates the version of Virginia Tech Annual Standards and Specifications applicable.

- The coversheet of the narrative shall include the date of the Virginia Tech Annual Standards and Specifications ESC and SWM applicable.
- The coversheet of the construction drawings must contain Virginia Tech Annual Standards and Specifications for ESC and SWM applicable.
- What is the date of the annual stds and spec. applicable to this project: _____

_____ Minimum Standards - All applicable Minimum Standards must be addressed.

- All minimum Standards must be adhered to during the entire project regardless of the phasing.
- Request for a Variance should be addressed
- What is the version date of the most recent checklist: _____
- What is the version date of the checklist used: _____

_____ Plan Prepare Checklist – The ESC/SWM Plan must adhere to the approved Virginia Tech Annual Standards and Specifications listed on the coversheets of the narrative and construction drawings.

- What is the version date of the most recent checklist: _____
- What is the version date of the checklist used: _____

_____ Technical Criteria - All applicable technical criteria must be addressed.

- All technical criteria must be adhered to during the entire project regardless of the phasing.
- Request for an Exception should be addressed in the Plan.

_____ Areas – Shapefiles of the areas have been provided

- Treatment Areas
- Applicable Areas
- Disturbed Areas
- Watersheds

NARRATIVE

_____ Project description - Briefly describes the nature and purpose of the land-disturbing activity, and the area (acres) to be disturbed.

- What time of year will the project start and finish? (construction sequence)
- How long will it take to complete the project?
- How many acres will be disturbed for completion of this project?
- How much impervious area will the project have in post-developed conditions?
- What will be the ultimate developed conditions of the site?

_____ Existing site conditions - A description of the existing topography, vegetation and drainage.

- Should list percentages of slope on the site.
- Types of existing vegetation that can be used as erosion control, or areas to be left undisturbed.
- Discuss marking of areas where existing vegetation is to be preserved.
- Discuss size of drainage areas in pre-development and post-development conditions.
- Discuss any existing drainage or erosion problems and how they are to be corrected.
- Discuss orientation of slopes (north or south facing).
- Discuss how existing site conditions can be used to reduce the potential for erosion and how proposed E&S controls will be designed to “fit” the site.
- Photographs?

_____ Adjacent areas - A description of neighboring areas such as streams, lakes, residential areas, roads, etc., which might be affected by the land disturbance.

- The potential for off-site damages must be considered and discussed
- ANY environmentally sensitive areas should be mentioned.
- Other private or public lands adjacent to the site should be described and considered for possible problems during and after construction (traffic problems, dust control, increases in runoff etc.)
- Discuss perimeter controls to be used.

_____ Off-site areas - Describe any off-site land-disturbing activities that will occur (including borrow sites, waste or surplus areas, etc.). Will any other areas be disturbed?

- Any off-site borrow or spoil areas should have an approved plan to supplement the overall project plan.
- If off-site areas are under other permits, proof of permits should be provided.
- List specific locations of all off-site areas
- Discuss who will be responsible for final stabilization and maintenance of off-site areas.

_____ Soils - A brief description of the soils on the site giving such information as soil name, mapping unit, erodibility, permeability, depth, texture and soil structure.

- Indicate references for soil information
- Provide a copy of soil survey map
- Indicate what sheet of site plan soils are delineated
- Check for soils with a high K factor, or poor drainage, low pH etc.

_____ Critical areas - A description of areas on the site which have potentially serious erosion problems (e.g., steep slopes, channels, wet areas, streams, underground springs, etc.).

- Discuss any area of the project which may become critical during the project. Some areas of the site may have long or steep slopes during a certain phase of the grading.
- Indicate areas to be left alone until they can be graded and stabilized in favorable conditions.
- Discuss precautions to communicate limits of these areas to contractors and equipment operators.

_____ Erosion and sediment control measures - A description of the methods which will be used to control erosion and sedimentation on the site. (Controls should meet the specifications in Chapter 3.)

- List all controls used, list specification numbers (3.02) location of practice.
- Discuss why it was selected.
- Sequence of installation, maintenance and removal for each control.
- Discuss temporary seeding as a means of erosion control, list the types to be used

_____ Permanent stabilization - A brief description, including specifications, of how the site will be stabilized after construction is completed.

- Final stabilization needs careful review.
- Is the timing of seeding correct with the construction sequence?
- List soil testing requirements
- Provide seeding specifications (pure live seed minimums), fertilizer and liming specifications. Seeding tables and rates.
- Is the type of permanent vegetation appropriate for the site?
- Discuss all other areas to be stabilized other than vegetation (gravel, paved, etc.)

_____ Stormwater runoff considerations - Will the developed site cause an increase in peak runoff rates? Will the increase in runoff cause flooding or channel degradation downstream? Describe the strategy to control stormwater runoff.

- Discuss how downstream properties and waterways will be protected (basins, channel improvements, easements)
- Discuss how increased runoff will be managed during construction
- List or discuss all other references for design of permanent facilities.

_____ Calculations - Detailed calculations for the design of temporary sediment basins, permanent stormwater detention basins, diversions, channels, etc. Include calculations for pre- and post-development runoff.

- All calculations showing pre-development and post-development runoff should be provided. Worksheets, assumptions and engineering decisions should be clearly presented to assist the plan reviewer in his or her duties.
- Calculation methods should be clearly presented and organized.
- Have the calculations shown that adequate protection of down-stream properties and waterways are protected?

_____ Profiles – Storm pipe/channel profiles

- Is the Channel/pipe bottom shown?
- Are roughness coefficients and material type provided?
- Are surcharges shown or indicated that none acquire for a given storm?
- Is the hydraulic grade line shown for the required storm?
- Is the existing ground shown?
- Is the proposed ground/grade shown?

_____ WQ Calculations - Detailed calculations for the design of water quality BMPs

- Include calculations for pre- and post-development runoff.
- All calculations showing pre-development and post-development impervious surfaces impact should be provided. Worksheets, assumptions and engineering decisions should be clearly presented to assist the plan reviewer in his or her duties.
- Calculation methods should be clearly presented and organized.
- Have the calculations shown that the required WQ treatment is being attained?

_____ Maintenance - A schedule of maintenance for permanent stormwater management measures (BMPs) should be provided.

- Should list who is responsible during construction and who will be responsible once the project is complete
- Should provide a schedule of inspections to be conducted
- List maintenance items to check and perform as well as precautions for large storm events
- Is the table from Appendix – L provided in the Plan? _____
- Are the numbers provided by SID?

SITE PLAN

- _____ Cover sheet – Contains the date of the Virginia Tech Annual Standards and Specifications for ESC and SWM applicable.
- _____ Minimum Std Notes – Contains Minimum Standards 1 through 19 (4VAC50-30-40) listed on the construction drawings.
- _____ General ESC Notes – Contains ES-1 through ES-16 notes listed on the construction drawings.
- _____ Areas – Numerical values for areas are listed on the construction sheets.
- Contains the total area to be disturbed
 - Contains the area to be disturbed per phase
 - Contains the existing impervious area
 - Contains the total impervious area after construction
- _____ Vicinity map - A small map locating the site in relation to the surrounding area. Include any landmarks which might assist in locating the site.
- Provide a reproduction of a topographic map, road map etc.
- _____ Indicate north - The direction of north in relation to the site.
- Useful tool for determining slope orientation
 - Useful for communicating written inspection reports and plan review comments
 - Useful in predicting areas off-site that might be effected by dust drift
- _____ Limits of clearing and grading – Areas which are to be cleared and graded.
- Show all areas to be disturbed on the site plan
 - Provide notes on how areas will be marked
 - Provide notes and illustrations to clearly indicate areas NOT to be disturbed
- _____ Existing contours - The existing contours of the site.
- Should be shown as dashed light lines in intervals from 1 to 5 feet.
 - Represent pre-developed drainage areas (check these areas for accuracy)
 - Show potential critical areas (slopes)
 - Helps to determine cut or fill areas, low spots
 - Helps to determine if E&S controls have been designed properly

_____ Final contours - Changes to the existing contours, including final drainage patterns.

- Should be shown as heavy solid lines
- Determines final drainage areas
- Check to see if pre-developed drainage areas have increased
- Check final grade of slopes to see if they will become critical (may need diversions or flumes)
- Check vegetative specifications for final grade of slopes (low or high maintenance). Are erosion controls blankets needed?

_____ Existing vegetation - The existing tree lines, grassed areas, or unique vegetation.

- Clearly indicate existing tree lines, vegetation areas to remain
- Provide notes on the plan for areas to be undisturbed

_____ Soils - The boundaries of different soil types.

- Indicate soil boundaries of all soil types on the site. List K factor and soil survey classifications.
- Provide notes of soil properties (texture, etc.)

_____ Existing drainage patterns - The dividing lines and the direction of flow for the different drainage areas. Include the size (acreage) of each drainage area.

- Should be indicated by acres and show the direction of flow for all existing drainage areas.
- Indicates the need for basins, traps or other structural measures
- Helps to determine if controls are designed correctly
- Helps to determine if off-site drainage needs to be diverted
- Useful in planning to break up drainage areas into smaller more manageable areas during construction

_____ Profile of storm drainage systems – Proposed storm drainage components shall be provided in a profile.

- Pipe diameter, material, inverts, stationing, percent slope, proposed and existing grade, etc. should be included as part of the profile

_____ Critical erosion areas - Areas with potentially serious erosion problems.

- All critical, environmentally sensitive or prohibited areas should be denoted on the plan and notes provided to state reasons for critical nature
- Stream considerations; temporary crossings, other permits, location of stockpiles, trash & debris removal, fuel storage, etc.

_____ Site Development - Show all improvements such as buildings, parking lots, access roads, utility construction, etc.

- All improvements such as building, roads, temporary access roads, right-of-ways and temporary easements should be shown on the plan.
- Utility improvements on and off-site should be shown.

Location of practices - The locations of erosion and sediment controls and stormwater management practices used on the site. Use the standard symbols and abbreviations in Chapter 3 of the VESC handbook.

- The exact location of all practices including vegetation should be clearly shown on the plan.
- A legend denoting symbols, line uses and other special characters should be provided
-

ESC BMPs – The ESC Measures (ESC BMPs) shall be clearly labeled.

- Are the ESC Measures (ESC BMPs) labeled with an ID that can be used in the SWPPP?

Detail drawings - all structural practices used should be explained and illustrated with detail drawings.

- Details should be provided which are clearly dimensioned and reflected the ability to be “built” in the field according to the proper design criteria.
- Alternative E&S measures must have proper drawings to indicate how and where they are to be constructed.
- All plan drawings, elevations and cross section drawings should show scales used to prepare the drawings.
- Outlet protection schedules should be provided
- Sizes and materials should be shown for all pipes, flumes and slope drains.
- All details should list the specification number from the VESCH
- If more than one type of specification is being used, then details of all practices shall be provided
- See Variances below

Variances - Any structural practices used that are not referenced to the E&S handbook or local handbooks should be explained and illustrated with detail drawings.

- Details should be provided which are clearly dimensioned and reflected the ability to be “built” in the field according to the proper design criteria.
- Alternative E&S measures must have proper drawings to indicate how and where they are to be constructed.
- All plan drawings, elevations and cross section drawings should show scales used to prepare the drawings.
- Installation instructions should be provided
- Maintenance instructions/schedule should be provided
- If more than one type of specification is being used, then details of all practices shall be provided

_____ Off-site areas - Identify any off-site land-disturbing activities (e.g., borrow sites, waste areas, etc.). Show location of erosion controls. (Is there sufficient information to assure adequate protection and stabilization?)

- Are separate plans required for off-site borrow or disposal areas?
- How will off-site areas be stabilized?
- Are there any temporary easements to be disturbed during construction?
- Who has final responsibility for off-site areas?

_____ ESC Maintenance - A schedule of regular inspections and repair of erosion and sediment control structures should be set forth.

- Indicate who is responsible for maintenance and repair of all E&S measures on the project (RLD).
- Indicate who is the primary contact for emergencies, for notification of problems (owner), etc.
- Provide clean-out and maintenance specifications for all major structures such as basins, traps, silt fence etc.
- Require monitoring reports from the RLD if needed

_____ SWM Maintenance - A schedule of maintenance for permanent stormwater management measures (BMPs) should be provided.

- Should list who is responsible during construction and who will be responsible once the project is complete
- Should provide a schedule of inspections to be conducted
- List maintenance items to check and perform as well as precautions for large storm events
- Is the table from Appendix – L provided in the Plan? _____

_____ Permanent BMPs – The permanent BMPs (post-construction BMPs) shall be clearly labeled.

- Do the permanent BMP IDs match the SID requirements?

VirginiaTech



APPENDIX J

Post-Construction BMPs

BMP Post-Construction Maintenance Responsibility

BMP ID	BMP Description	Name	Title	Department	Phone No.	Email
		Anthony Watson	Assoc. Director Building Trades & Grounds	Facilities	540-231-6852	anwatson@vt.edu
		Anthony Watson	Assoc. Director Building Trades & Grounds	Facilities	540-231-6853	anwatson@vt.edu
		Anthony Watson	Assoc. Director Building Trades & Grounds	Facilities	540-231-6854	anwatson@vt.edu
	
	

Note: Add additional rows as needed to account for all post-construction BMP's installed as part of this project.

Site & Infrastructure Development Department (SID) will provide the post-construction BMP IDs. Please provide SID with the number of post-construction BMPs used on the site prior to submit the ESC/SWM Plan for review. The designer will need to add the BMP IDs provided by SID on the construction drawings and in the table above.

VirginiaTech



APPENDIX K

DESIGN PROFESSIONAL CERTIFICATION
OF
ESC MEASURES

VirginiaTech



APPENDIX L

PRE-APPROVED VARIANCES

Table of Contents

L.01 - Dewatering

- Dandy Dewatering Bag
- Dirtbag Dewatering Bag

L.02 - Diversion

- ACF Erosion Eel

L.03 - Inlet Protection

- ACF Grate Gator Sediment Containment
- ACF Gutterbuddy Curb Inlet Drain Filters
- ACF GutterEel Curb Inlet Drain Filters
- ACF SiltSack Sediment Capture Device
- Dandy Bag Inlet Protection System
- Dandy Curb Grateless Curb Inlet and Median Barrier Inlet Protection System
- Dandy Curb Bag Curb and Gutter Inlet/Grate Protection System
- Dandy Curb Sack Curb and Gutter Protection System
- Dandy Pop (Pop-up Dandy Bag) Inlet Protection System
- Dandy Sack Inlet Protection System
- Rapid Flow Drain Filter – Polystyrene Aggregate

L.04 - Silt Fence

- ACF Silt Fence

L.05 – Bio-soil Mixture


- Bio-soil Mixture

Dandy Dewatering Bag[®]




DANDY DEWATERING BAG™

TOP VIEW

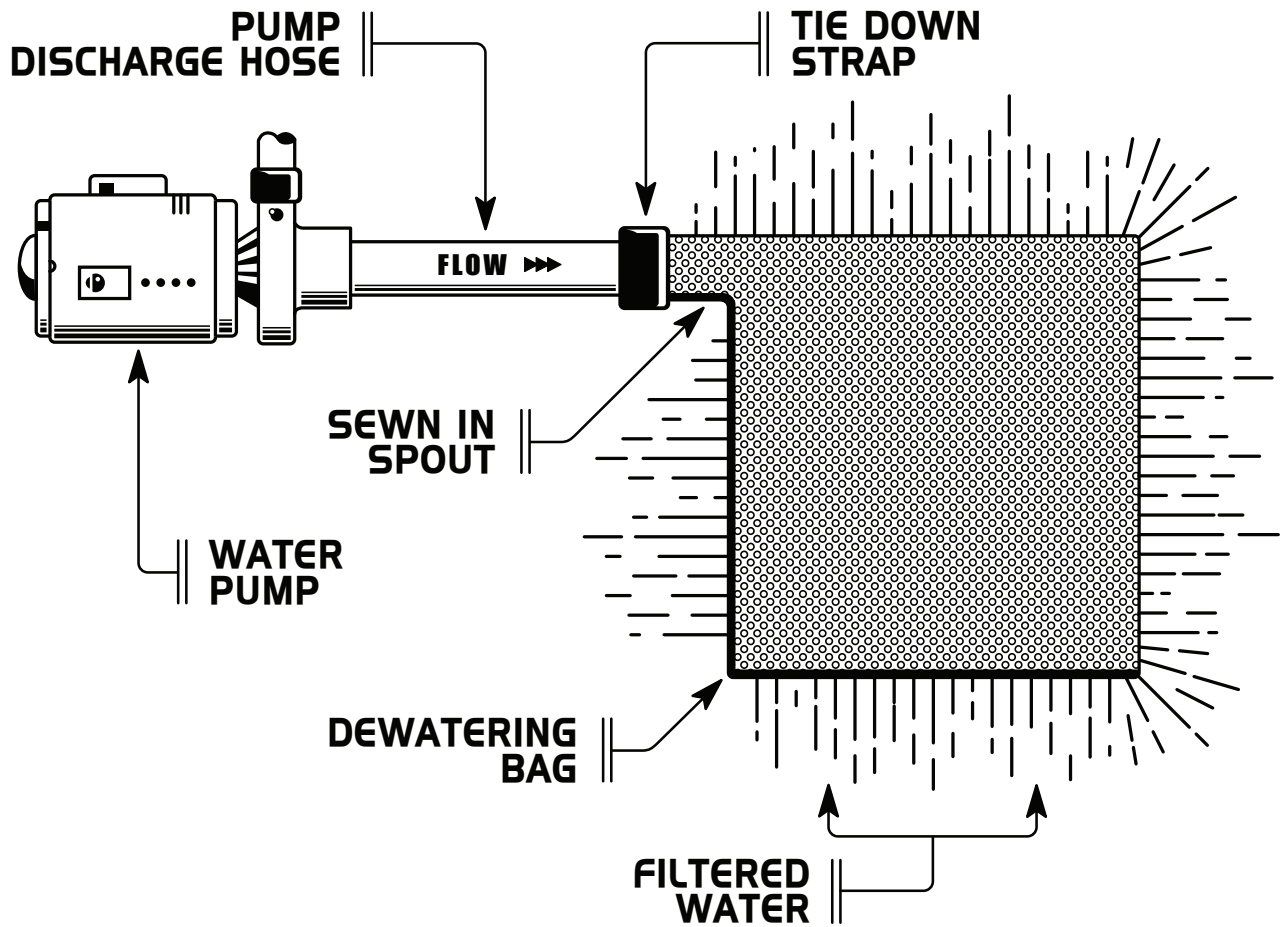

SIDE VIEW

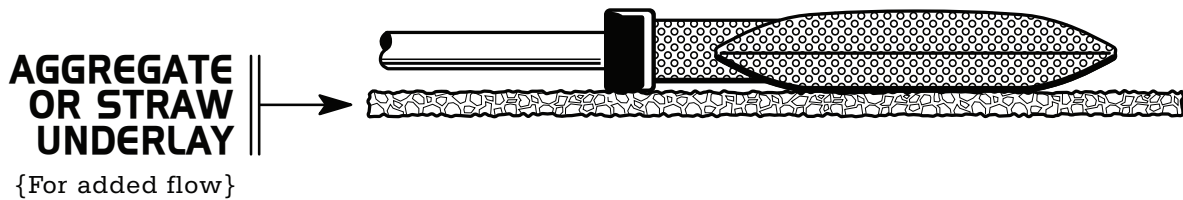

**DANDY DEWATERING BAG™
PUMPED WATER SEDIMENT CONTROL SYSTEM GUIDE
SPECIFICATIONS**

PRODUCT:

DANDY DEWATERING BAG™

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E Mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this consists of furnishing, installing, maintaining, and removal of the Dandy Dewatering Bag™. The purpose is to control sediment discharge in any dewatering or pumped water application.

2.0 Material:

2.1 The Dandy Dewatering Bag™ shall be a bag sewn of nonwoven fabric **in the U.S.A.** using a double needle machine and a high strength thread.

2.2 The Dandy Dewatering Bag™ shall have a spout opening large enough to accommodate at least a four (4) inch pump discharge hose with an attached strap to tie unit closed.

2.3 The Dandy Dewatering Bag™ Seams shall be a double stitched “J” type seam with an average wide width strength per ASTM D-4884 of 60lb/in for a 8 oz. fabric manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	MARV
Grab Tensile Strength	ASTM D 4632	kN (lbs)	0.9 (205)
Grab Tensile Elongation	ASTM D 4632	%	50
Puncture Strength	ASTM D 4833	kN (lbs)	0.58 (130)
Mullen Burst Strength	ASTM D 3786	kPa (psi)	2618 (380)
Trapezoid Tear Strength	ASTM D 4533	kN (lbs)	0.36 (80)
% Open Area	COE - 22125-86	%	N/A
Apparent Opening Size	ASTM D 4751	mm (US Std Sieve)	.0180 (80)

Permittivity	ASTM D 4491	sec ¹	1.2
Permeability	ASTM 4491	cm/sec	0.21
Water Flow Rate	ASTM 4491	l/min/m ² (gal/min/ft ²)	3866 (95)
Ultraviolet Resistance	ASTM D 4355	%	70
Color			Black

3.0 Installation:

- 3.1 Lifting straps (not included) should be placed under the unit to facilitate removal after use.
- 3.2 Unfold Dandy Dewatering Bag™ on a stabilized area over dense vegetation, straw, or gravel (if an increased drainage surface is needed) or as detailed in plans.
- 3.3 Insert discharge hose from pump into Dandy Dewatering Bag™ a minimum of six (6) inches and tightly secure with attached strap to prevent water from flowing out of the unit without being filtered.

4.0 Maintenance:

- 4.1 Replace the unit when ½ full of sediment or when sediment has reduced the flow rate of the pump discharge to an impractical rate.
- 4.2 Remove and dispose of the sediment in a manner satisfactory to the engineer/inspector or in one of the following ways:
 - A) Remove the unit and sediment from environmentally sensitive areas and waterways. At the approved disposal site, slit the unit; remove the sediment and grade smoothly into the existing topography. Dispose of unit no longer in use at an appropriate recycling or solid waste facility.
 - B) Bury unit on site; remove any visible fabric and seed.

5.0 Method of Measurement:

- 5.1 The quantity to be paid is for the actual number of Dandy Dewatering Bags™.

6.0 Basis of Payment:

6.1 The unit price shall include labor, equipment, and materials necessary to install, maintain, and remove the Dandy Dewatering Bag™.

6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Dewatering Bag™	EA	Pumped Water Sediment Control Unit (#_____UNITS)



Pumped Sediment Removal System

Whenever accumulated water must be pumped!

Protect the environment effectively and economically with Dirtbag®! Collect sand, silt and fines. Avoid silting streams, surrounding property and storm sewers. As more and more emphasis is put on saving our wetlands, regulations are becoming more stringent regarding the pumping of dirty water from holes around construction sites—such as foundations, pipe line construction, repairing municipal water/sewer lines, marine construction, utility, highway and site development areas. Dirtbag® applications are endless.

Use Recommendations

ACF Environmental manufactures Dirtbag® using a variety of woven and nonwoven geotextile fabrics. The fabric properties on the Specifications page affirm the strength of Dirtbag® and are a result of tests conducted at on-site laboratories at the geotextile factory. All test methods are ASTM or industry standards.

Each standard Dirtbag® has a fill spout large enough to accommodate a 4" discharge hose. Straps are attached to secure the hose and prevent pumped water from escaping without being filtered.

Strap the neck of Dirtbag® tightly to the discharge hose. To increase the efficiency of filtration, place the bag on an aggregate or haybale bed to maximize water flow through the surface area of the bag.



Dirtbag® is full when it no longer can efficiently filter sediment or pass water at a reasonable rate. Flow rates will vary depending on the size of Dirtbag®, the type and amount of sediment discharged into Dirtbag, the type of ground, rock or other substance under the bag. Under most circumstances Dirtbag® will accommodate flow rates of 750 gallons per minute. Use of excessive flow rates or overfilling Dirtbag® with sediment will cause ruptures of the bags or failure of the hose attachment straps.

Dirtbag must be monitored during use.

Easy To Use

First, Dirtbag® is easy to transport to the site. To install, simply unfold and insert up to 4" pump discharge the hose into the hand-sewn spout and secure with the attached straps. Pump dirty water into Dirtbag®. The bag collects sediment silt as the clean water gently filters out from all sides.

Compare Dirtbag® to the alternatives such as straw bale forts which are more cumbersome to transport, to build and to clean afterward. Best of all, Dirtbag® poses no threat to the environment when disposed properly.


Dirtbag® Features

- Designed and produced from a variety of fabrics to meet engineering specifications for flow rates, strength and permeability.
- Stabilized to provide resistance to ultra-violet degradation.
- Meets municipal, state and Corps of Engineers specifications.
- Available in 10' x 15', 12 ½' x 15' and 15' x 15' sizes. Custom sizes available.

Hillside Installation on Straw Underlayment



Typical Dirtbag® Construction

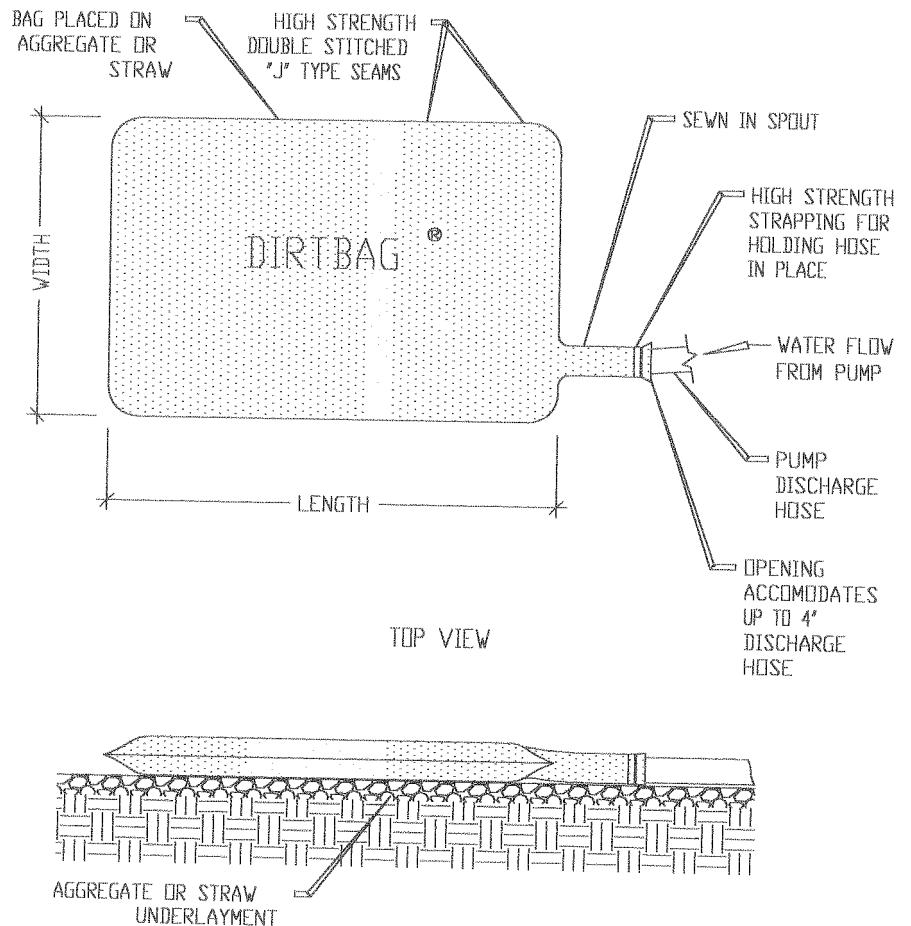

Dirtbag® Specification

Control of Sediment In Pumped Water

All properties are Minimum Average Roll Value (MARV) except the weight of the fabric which is given for information only. Depending on soil conditions and filtration requirements, additional geotextile options are available. Please call our engineering staff for solutions.

1.0 Description

1.1 This work shall consist of furnishing, placing and removing Dirtbag® pumped sediment control device as directed by the design engineer or as shown on the contract drawings. Dirtbag® pumped-silt control system is marketed by:

*ACF Environmental, Inc.
2831 Cardwell Road
Richmond, Virginia 23234
Phone: 800-448-3636 • Fax: 804-743-7779
www.acfenvironmental.com*

2.0 Materials

2.1 Dirtbag®

2.1.1 Dirtbag® shall be manufactured using a polypropylene nonwoven geotextile sewn into a bag with a double needle matching using a high strength thread.

2.1.2 Each standard Dirtbag® has a fill spout large enough to accommodate a 4" discharge hose. Straps are attached to secure the hose and prevent pumped water from escaping without being filtered.

2.1.3 Dirtbag® seams shall have an average wide width strength per ASTM D-4884 as follows:

Dirtbag® Style	Test Method	Test Method
Dirtbag® 53	ASTM D-4884	60 lbs./in
Dirtbag® 55	ASTM D-4884	100 lbs./in

Property	Test Method	Units	Test Results	
			Style 53	Style 55
Weight	ASTMD-3776	oz/yd	8	10
Grab Tensile	ASTMD-4632	lbs.	205	250
Puncture	ASTMD-4833	lbs.	110	150
Flow Rate	ASTMD-4491	gal/min/ft ²	110	85
Permittivity	ASTMD-4491	sec. ⁻¹	1.5	1.2
Mullen Burst	ASTMD-3786	lbs. in ²	350	460
UV Resistant	ASTMD-4355	%	70	70
AOS % Retained	ASTMD-4751	US Sieve	80	100

3.0 Construction Sequence

3.1.1 To install Dirtbag® on a slope so incoming water flows downhill through Dirtbag® without creating more erosion. Strap the neck of Dirtbag® tightly to the discharge hose. To increase the efficiency of filtration, place the bag on an aggregate or haybale bed to maximize water flow through the surface area of the bag.

3.1.2 Dirtbag® is full when it no longer can efficiently filter sediment or allow water to pass at a reasonable rate. Flow rates will vary depending on the size of Dirtbag®, the type and amount of sediment discharged into Dirtbag®, the type of ground, rock or other substance under the bag and the degree of the slope on which the bag lies. Under most circumstances Dirtbag® will accommodate flow rates of 750 gallons per minute. Use of excessive flow rates or overfilling Dirtbag® with sediment will cause the bag to rupture or failure of the hose attachment straps.

*Must be monitored during use.

3.1.3 Dispose Dirtbag® as directed by the site engineer. If allowed, Dirtbag® may be cut open and the contents seeded after removing visible fabric. Dirtbag® is strong enough to be lifted with optional straps if it must be hauled away. Off-site disposal may be facilitated by placing Dirtbag® in the back of a dump truck or flatbed prior to use and allowing the water to drain from the bag while in place, thereby eliminating the need to lift Dirtbag®.

4.0 Basis of Payment

4.1 The payment for any Dirtbag® used during construction is to be included in the bid of overall erosion and sediment control plan unless a unit price is requested.

*ACF Environmental is not liable for failures or misuse of the Dirtbag.



Above: Dirtbag® installation shown on inclined hillside for maximum flow.


Disposal

Dispose of Dirtbag® as directed by the site engineer. If allowed, Dirtbag® may be cut open and the contents seeded after removing visible fabric. Dirtbag® is strong enough to be lifted with optional straps if it must be hauled away. Off-site disposal may be facilitated by placing Dirtbag® in the back of a dump truck or flatbed prior to use and allowing the water to drain from the bag while in place, thereby eliminating the need to lift Dirtbag®.

Dirtbag® Features:

1. High strength double stitched "J" type seams.
2. Sewn in spout.
3. High strength strapping for holding hose in place.
4. Hose opening accommodate up to 4" discharge hose.

For optimal flow, install over straw or aggregate.

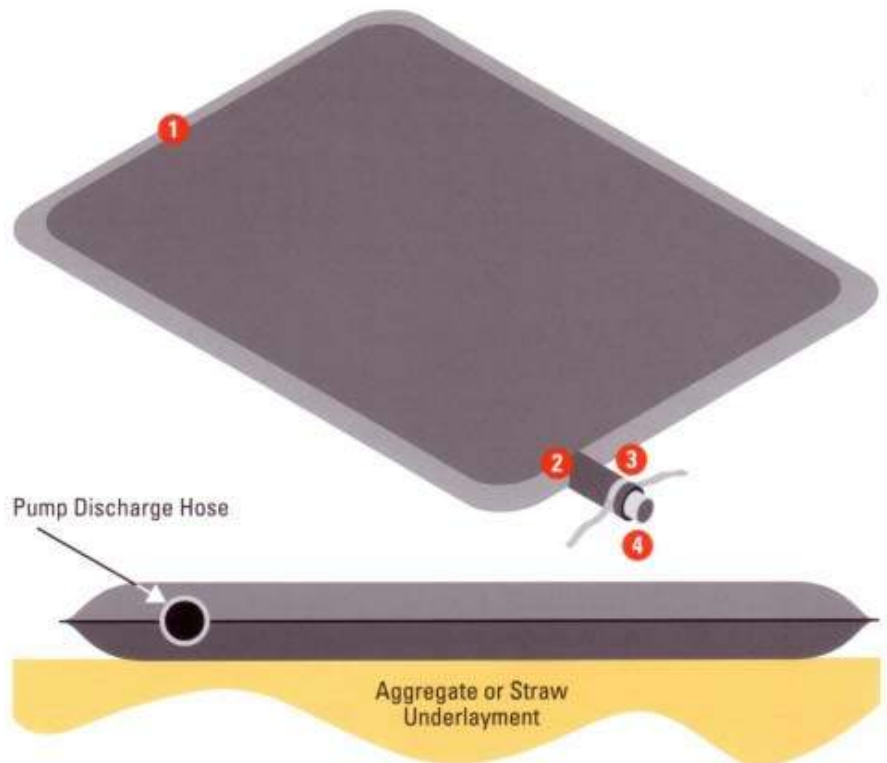

Customer Focused, Environmentally Committed

2831 Cardwell Road
 Richmond, Virginia 23234
 (800) 448-3636 • FAX (804) 743-7779
 www.acfenvironmental.com

ACF Environmental "Complete Source for Stormwater Solutions"

Distributed by:

EROSION EEL™

The Erosion EEL™, by its very nature, functions to help prevent physical degradation of the environment by enhancing water quality.



What Is The ErosionEEL™

The ErosionEEL™ is an environmentally friendly, low impact erosion and sediment control device.

Erosion EEL™ Advantages

- *Easy installation with no trenching required*
- *Replaces silt fence, rock check dams, temporary diversion berms, and storm/inlet drain protection*
- *May be placed over multiple surfaces including soil, asphalt, concrete, and surface rock*
- *DOT Approved in many states*
- *Durable, reusable, and easily moved, thereby making it very cost-effective compared to silt fence and other BMPs*
- *Increased flow rates through the filter material as compared to silt fence preventing localized flooding during storm events*

ErosionEEL™ is reusable within a project and can be moved to other project sites:

Minimizes the amount of new product manufacturing (involving extraction of natural resources, additional manufactured products into the environment).

At the end of EEL cycle, rubber material is cleaned and reused in new EELs that are produced.

Call ACF Environmental for more information.



Benefits and Features

- Three-dimensional Filter - Sediment retention roll/tube
Function: Suspended particle capture; flow control
- Woven polypropylene geotextile exterior
- Nominal 9.5" diameter
- Manufactured lengths = Nominal 10ft and 4.5ft
- Internal fill Material Mixture
Washed shredded rubber (metal removed) - Supplier: MTR AASHTO - specified hardwood chips (0.5" to 0.75" in size)

Environmental Compatibility

Synthetic Precipitation Leach Procedure (SPLP)

pH of 4.2 and pH 7.0 (modified SPLP)

Testing for metals, volatiles, surfactants, base/neutral extractables, acid extractables

Rubber Fill Material Results



No adverse levels of any constituents have been extracted (relative to human exposure and aquatic toxicity)

Synthetic Fibers (nylon, PP, PET)

No adverse levels of any constituents have been extracted (relative to human exposure and aquatic toxicity)

Performance

The test results for the ErosionEEL™ at the San Diego State University Soil Erosion Research Laboratory revealed that the EEL is very resilient under extreme rainfall intensities and slope conditions. The protocol used was designed to fail all BMPs in order to determine the performance limits. However, the ErosionEEL™ retained as high as 89% solids from a 33% barren slope under rainfall conditions at or exceeding the 1000 year storm event.

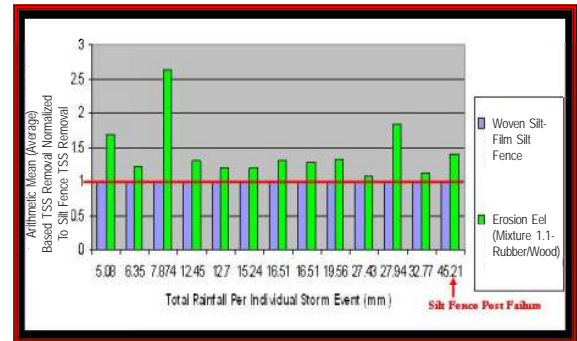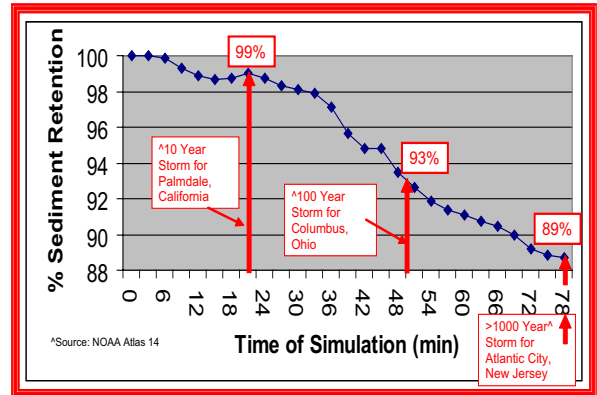

ACF Environmental

"Complete Source for Storm Water Solutions"









2831 Cardwell Road
Richmond, Virginia 23234
(800) 448-3636 • FAX (804) 743-7779
www.acfenvironmental.com

Distributed by:



(800) 644-9223
www.thebmpstore.com

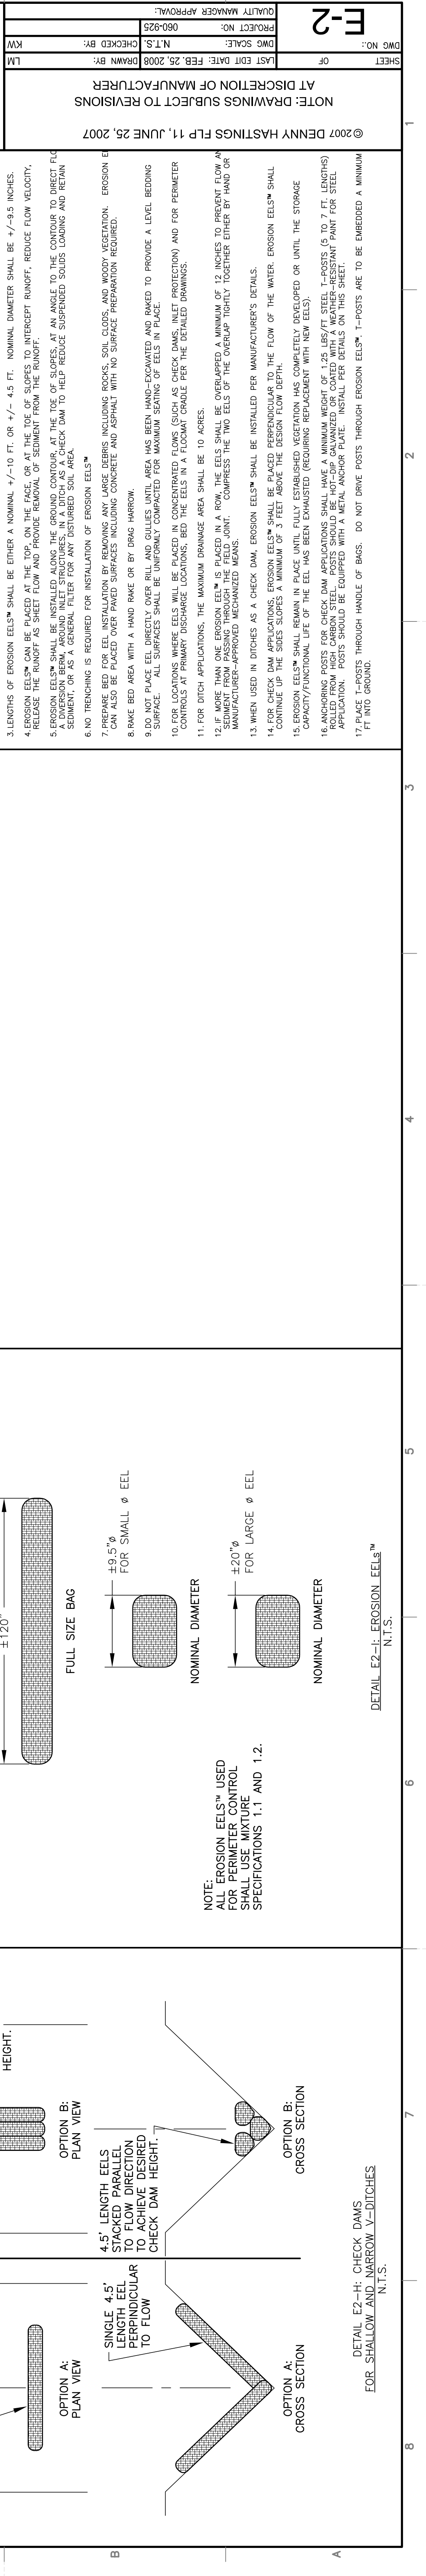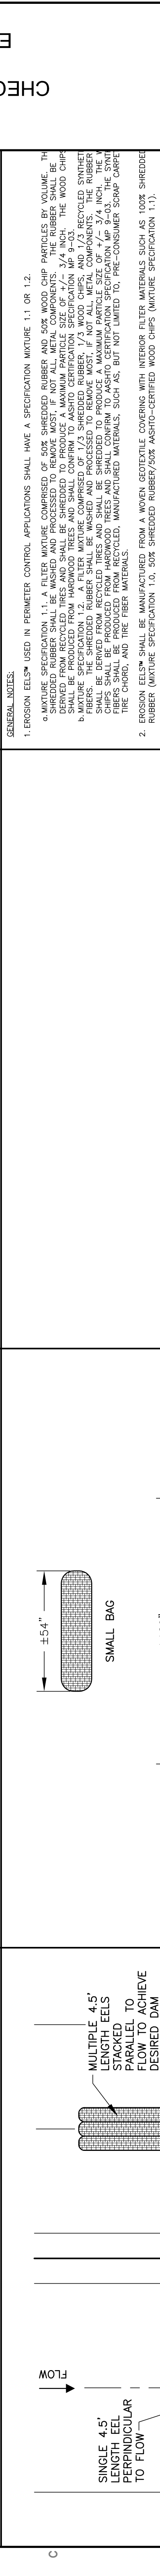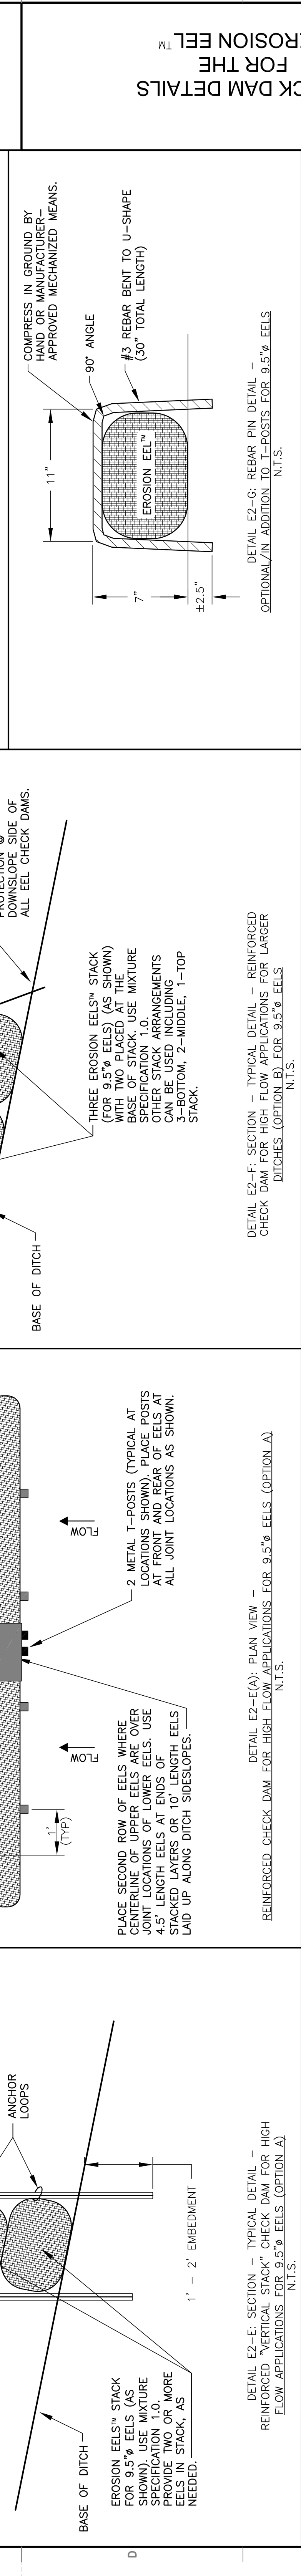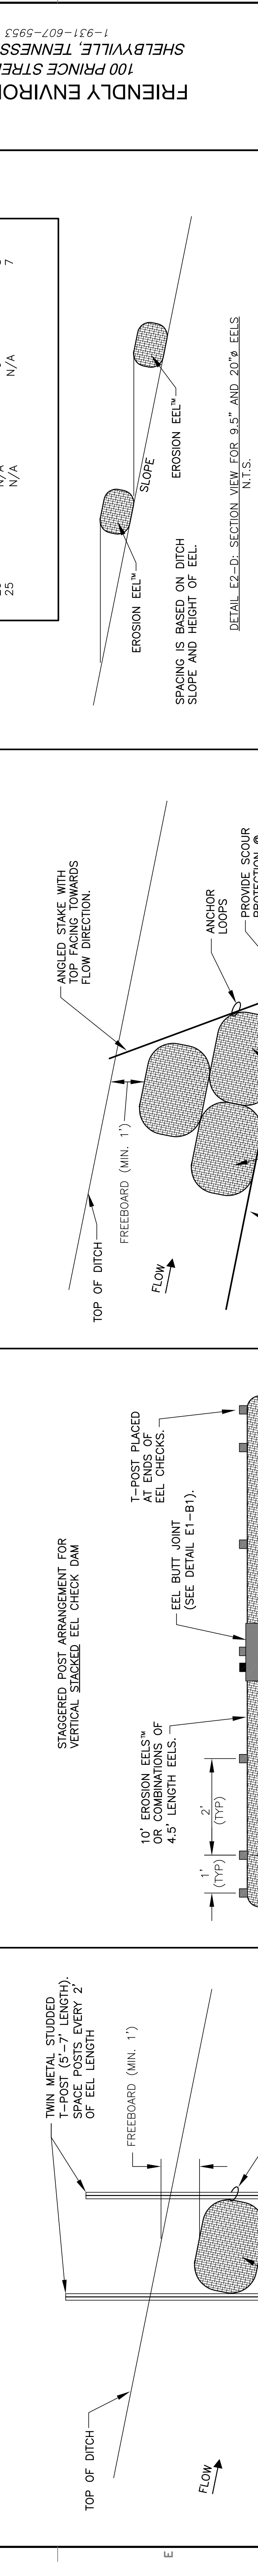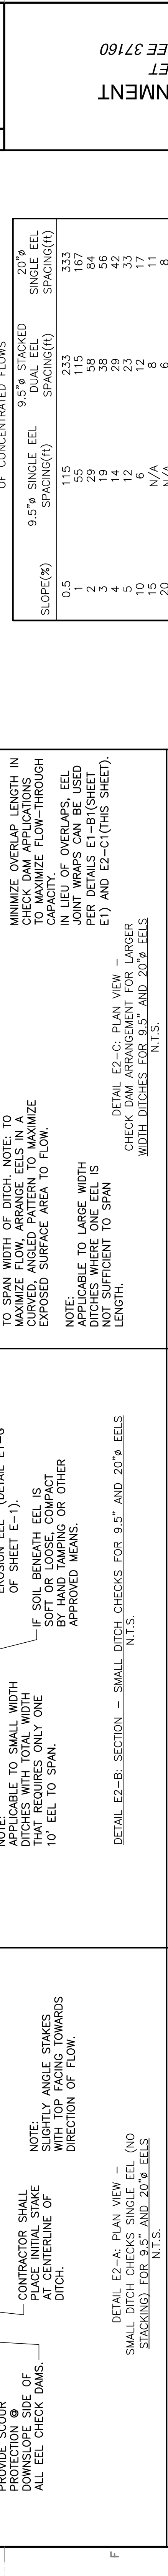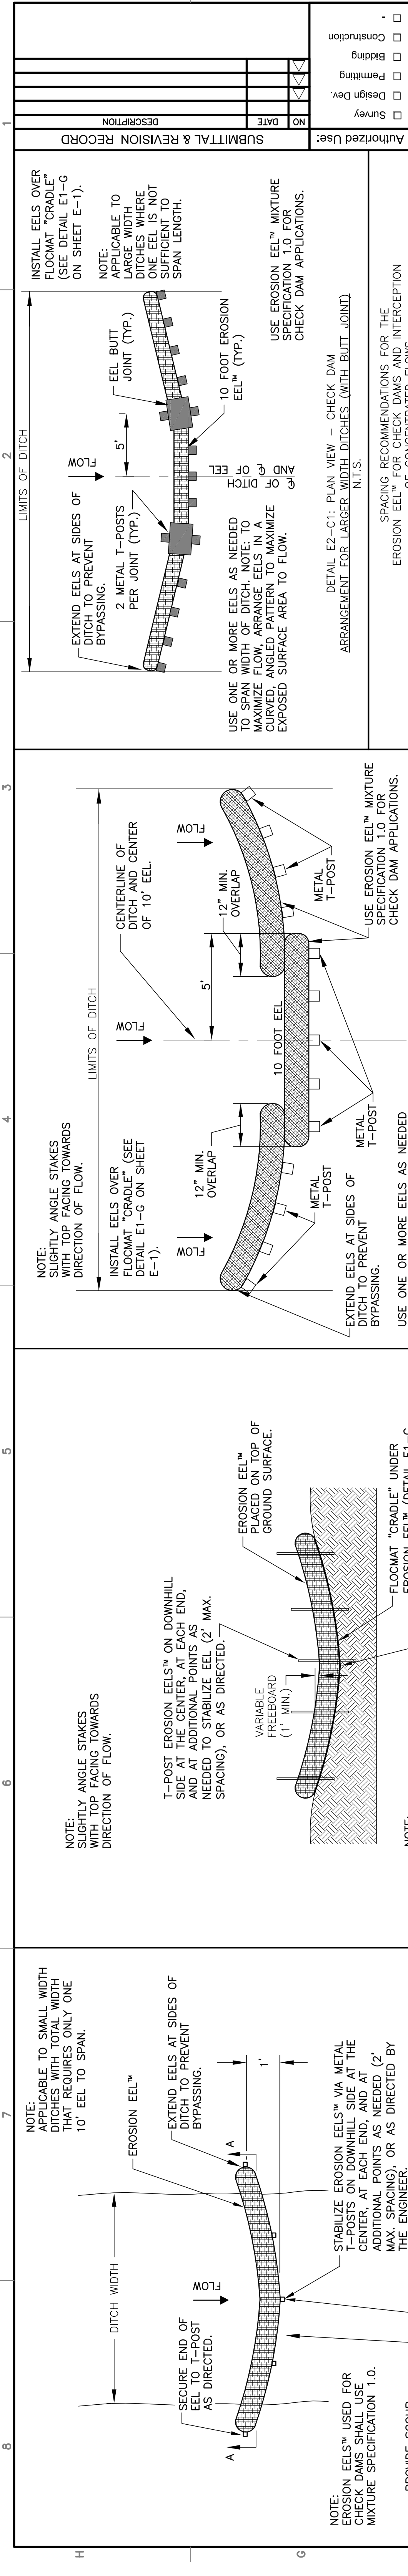

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NOTE: APPLICABLE TO SMALL WIDTH DITCHES WITH TOTAL WIDTH THAT REQUIRES ONLY ONE 10' EEL TO SPAN.

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION

NO.	DATE	DESCRIPTION



FRIENDLY ENVIRONMENT
100 Prince Street
Shelbyville, TN 37160
Phone: 1-866-H2O-EELS
Alternate Phone: (931) 639-0729
E-Mail: info@friendlyenvironmentUS.com

Installation Instructions for the Erosion Eel™

1. Erosion Eels can be placed at the top, on the face, or at the toe of slopes to intercept runoff, reduce flow velocity, releasing the runoff as sheet flow, and provide reduction/removal of suspended solids from the runoff.
2. Erosion Eels shall be installed along the ground contour, at the toe of slopes, at an angle to the contour to direct flow as a diversion berm, around inlet structures, in a ditch as a check dam to help reduce suspended solids loading and retain sediment, or as a general filter for any disturbed soil area.
3. No trenching is required for installation of Erosion Eels.
4. Prepare the bed for Eel installation by removing any large debris including rocks, soil clods, and woody vegetation (>1 inch in size). Erosion Eels can also be placed over paved surfaces including concrete and asphalt with no surface preparation required.
5. Rake bed area with a hand rake or by drag harrow.
6. All surfaces shall be uniformly and well-compacted for maximum seating and stability of the Eels in place.
7. Do not place Eel directly over rills and gullies until area has been hand excavated and raked to provide a level bedding surface in order for the Eels to seat uniformly with no bridging effects that would allow flow to bypass under the bag.
8. For locations where Eels will be placed in concentrated flows (such as check dams, inlet protection) and for perimeter controls at primary discharge locations, bed the Eels in a jute mesh (or FlocMat™) cradle.
9. If more than one erosion Eel is placed in a row, install the Eels by firmly butting the sewn end against tied end of the Eels together to form a butt joint. No wraps are required around the joints locations.
10. Eels shall be installed where the handles will be positioned at the very top of the bag.

11. Place anchoring posts for check dam applications behind (downstream of) the Eels.
12. Posts should be metal t-posts with a minimum weight of 1.25 lbs/ft steel 5 to 7 ft. lengths rolled from high carbon steel. Post should be hot dipped galvanized or coated with a weather-resistant paint. Post should have a metal anchor plate.
13. Do not drive the post through the erosion Eels. Install the Eels by bedding them in a jute cradle and placing them in contact with (e.g., butted against) the anchoring post.
14. T-post are to be embedded a minimum of 2 ft on most moderately sloped applications. Embed posts a minimum of 3 ft. into ground on slopes greater than 25%.



Sediment Containment



GrateGator Catch Basin

GrateGator Advantages



- *Lightweight*
- *Easy to use and reuse*
- *No stone or sand needed*
- *Flip top allows for easy maintenance*

GrateGator

GrateGator is an innovative new “above the grate” storm water filter designed to remove sediment and debris from storm water as it enters the catch basin. Manufactured with a durable, high flow multidimensional filter, the GrateGator has superior flow rates to alternative methods or products used in this application. With built in overflow protection, the GrateGator is efficient at filtering out contaminants while allowing bypass during extreme wet weather events. GrateGator can be cleaned and reused over and over for the life of the project.

The unit easily slides over the grate edges and has a low profile to prevent damage. The GrateGator eliminates the need for sand bags or stone bundles which create a source for storm water contamination if and when they fail or burst from vehicle damage.

Call ACF Environmental for more information.

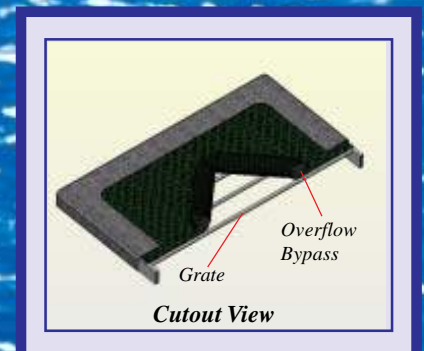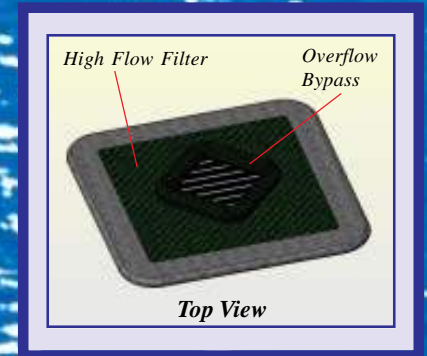

GrateGator Specification:

1.0 Description

1.1 This work shall consist of furnishing, placing, maintaining and removing the GrateGator sediment control device as directed by the engineer and as shown on the contract drawings. The GrateGator sediment control system manufactured by:

ACF Environmental, Inc.

2831 Cardwell Road

Richmond, Virginia 23234

Phone: 800-448-3636 • Fax: 804-743-7779

www.acfenvironmental.com

2.0 Materials

2.1 GrateGator

2.1.1 The GrateGator will be manufactured so the high flow filter portion of the unit covers the inlet grate. The installation sleeve is then tucked under the grate and the unit is held in place by the grate.

3.0 Construction Sequence

3.1 General

3.1.1 Install GrateGator so the green filter material covers the surface area of the grate and the installation sleeve is not visible at the surface.

3.1.2 The GrateGator should be cleaned if a visual inspection shows sediment and debris build up around the GrateGator.

3.1.3 To remove GrateGator, lift grate unit by access through GrateGator overflow bypass.


3.1.4 Clean as needed. Store out of direct sunlight.

3.1.5 Ponding is likely if sediment is not removed regularly. Inspection of GrateGator should be on a regular basis and immediately after wet weather events.


GrateGator

Installation and Maintenance:

- Remove grate.
- Place grate on its side.
- Slide installation sleeve over one side of the grate.
- Place grate on the opposite edge and slide GrateGator over remaining surface.
- Replace grate.
- Inspection after each wet weather event is recommended.
- Remove all sediment and debris from surface after each wet weather event.
- Remove GrateGator, clean out and replace.



GrateGator Jr. no overflow



ACF Environmental

“Complete Source for Stormwater Solutions”



2831 Cardwell Road
Richmond, Virginia 23234
(800) 448-3636 • FAX (804) 743-7779
www.acfenvironmental.com

Distributed by:



(800) 644-9223
www.thebmpstore.com



Curb Inlet Drain Filters

88.2% Reduction in Total Suspended Solids

87.4% Reduction in Hydrocarbons



Gutterbuddy™ Curb Inlet and Ditch Pavement Filters

Gutterbuddy™ Advantages

- Easy to transport, install and maintain
- Keeps out sand, asphalt millings and other fine sediment
- Available in regular and super flow
- Washable
- Reusable

Gutterbuddy™ Curb Inlet Filters

effectively prevent sediment, debris and other pollutants from entering storm water systems. The filtering action lets water freely flow through the fibrous material while stopping sediment and debris. Built-in overflows drain water even more quickly during extreme events.

Long lasting Gutterbuddy™ Curb Inlet Filters are 9" in diameter and can be purchased in 4', 6', 8', 10', 12', 14' and 16' lengths. These inlet filters are flexible enough to conform to any curb radius, allowing for quick and easy installation.

Gutterbuddy™ Ditch Pavement Filters

effectively prevent sediment, debris and other pollutants from entering storm water systems or other areas that ditch pavement is used to channel water runoff. Their filtering action lets water freely flow through the fibrous material while stopping sediment and debris. Each ditch pavement filter comes with a stake hole at each end and has bendable steel in the middle of the fabric that allows it to conform to all types of ditch pavement.

For more information about Gutterbuddy™ Curb Inlet and Drainage Ditch Filters, call your ACF Environmental or SI Geosolutions distributor.

PROBLEM:



Failed Inlet Protection

SOLUTION:



Gutterbuddy™ Curb Inlet Drain Filter




Gutterbuddy™ Specification

For Curb Gutter Storm Drains

1.0 Description

1.1 This work shall consist of furnishing, placing, maintaining and removing the Gutterbuddy™ sediment control device as directed by the engineer and as shown on the contract drawings. The Gutterbuddy™ sediment control system distributed by:

*ACF Environmental, Inc.
2831 Cardwell Road
Richmond, Virginia 23234
Phone: 800-448-3636 • Fax: 804-743-7779
www.acfenvironmental.com*

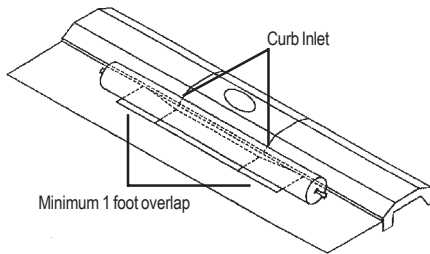

2.0 Materials

2.1 GUTTERBUDDY™

The Gutterbuddy™ shall be synthetic filter manufactured from recycled synthetic fibers.

2.1.1 The Gutterbuddy™ will be manufactured to be 9” in diameter and are available in 4’, 6’, 8’, 10’, 12’, 14’ and 16’ lengths and a minimum of twenty-four (24) inches longer than the curb inlet opening. This will allow for sufficient length to cover the inlet with twelve (12) inches beyond the inlet on both ends.

3.0 Construction Sequence

3.1 General

3.1.1 Install the Gutterbuddy™ in front of the curb inlet opening. Each end of the Gutterbuddy™ should overlap the curb inlet approximately 12”.

3.1.2 The Gutterbuddy™ should be cleaned if a visual inspection shows silt and debris build up around the Gutterbuddy™.

3.1.3 To remove the Gutterbuddy™, lift out of the opening.

3.1.4 The Gutterbuddy™ is reusable. Once the construction project is complete and it is no longer needed for sediment control, remove, clean and store out of the sunlight until needed on the next project.

3.1.5 Ponding is likely if sediment is not removed regularly. Inspection of Gutterbuddy™ should be on a regular basis and immediately after major rain events.

4.0 Basis of Payment

4.1 The payment for any Gutterbuddy™ used during the construction is to be included in the bid of the overall erosion and sediment control plan and priced by the linear foot.



ACF Environmental

“Complete Source for Storm Water Solutions”





(800) 644-9223
www.thebmpstore.com

Distributed by:



2831 Cardwell Road
Richmond, Virginia 23234
(800) 448-3636 • FAX (804) 743-7779
www.acfenvironmental.com

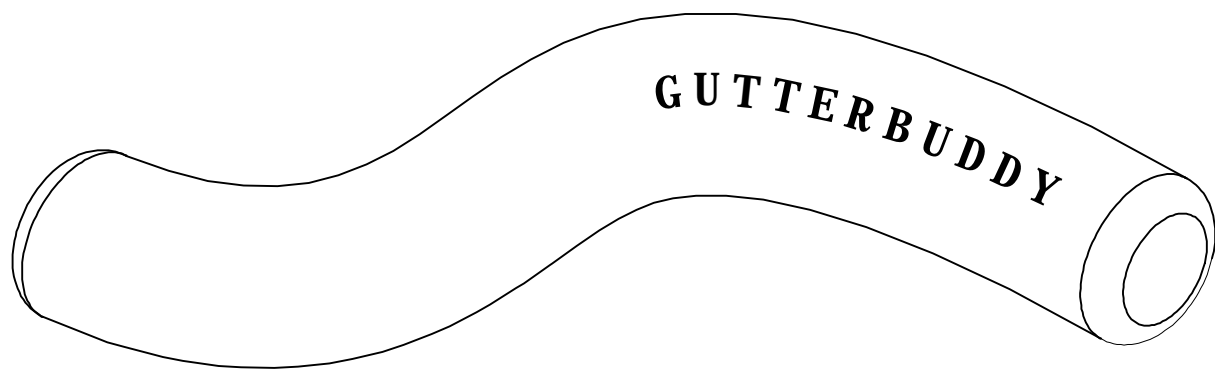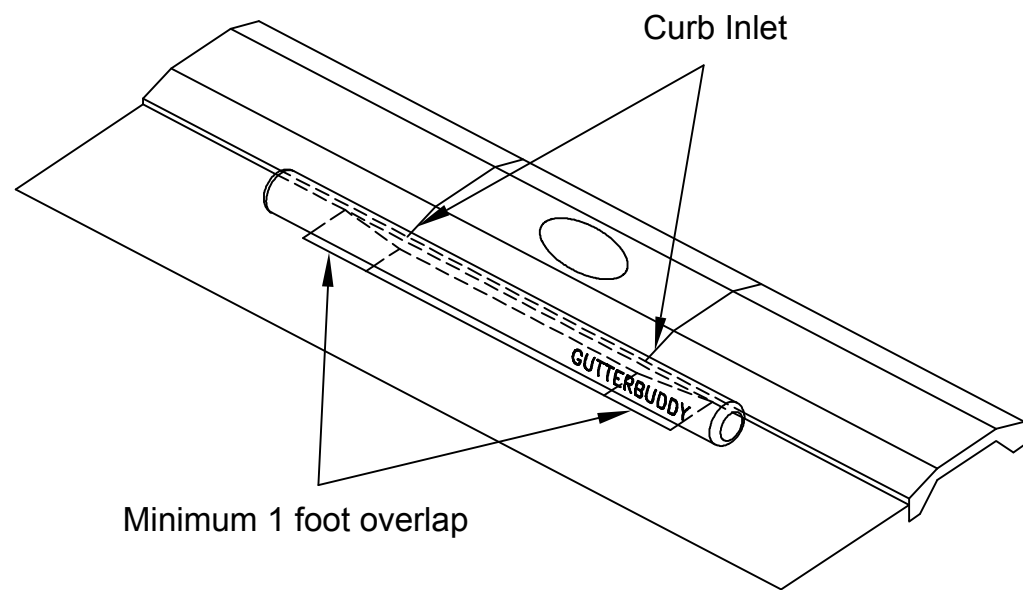

GUTTERBUDDY[®] Curb Inlet Drain Filters

PROJECT:

CITY:

DR. BY:

STATE:

DATE:

DR. NO:

GutterEEL™

NEW
from ACF!

The GutterEEL™, is used on any active construction site where soils have been disturbed. It is used to filter runoff from construction sites at stormwater inlets.



What Is The GutterEEL™

The GutterEEL™ is a highly effective curb inlet sediment control filter used to remove suspended soils, trash and debris from stormwater runoff. GutterEEL™ is manufactured with a high flow/high strength outer filter sleeve encasing 100% shredded tire filter media.

The GutterEEL™ is designed with a built in overflow weir to prevent ponding during heavy storm events. The weight of the unit holds it firmly in place close to the curb face and it's durability allows the unit to be cleaned and reused from job to job.

GutterEEL™ Advantages

- *Designed with high flow overflow weir for extreme wet weather events*
- *High flow/high strength outer filter*
- *Filter media composed of 100% recycled, shredded tires*
- *Easy to install, use, and reuse*

- *Weight of unit holds it securely to curb surface*

GutterEEL™ is easily cleaned and is reusable. This advanced technology provided by ACF Environmental is superior to traditional inlet protection methods such as stone or hay bales.

Call ACF Environmental or your local representative for more information.




GutterEEL™ Specification

1.0 Description

1.1 This work shall consist of furnishing, placing, maintaining and removing the GutterEEL™ sediment control device as directed by the engineer and as shown on the contract drawings. The GutterEEL™ sediment control system is distributed by:

ACF Environmental, Inc.
 2831 Cardwell Road
 Richmond, Virginia 23234
 Phone: 800-448-3636 • Fax: 804-743-7779
 www.acfenvironmental.com

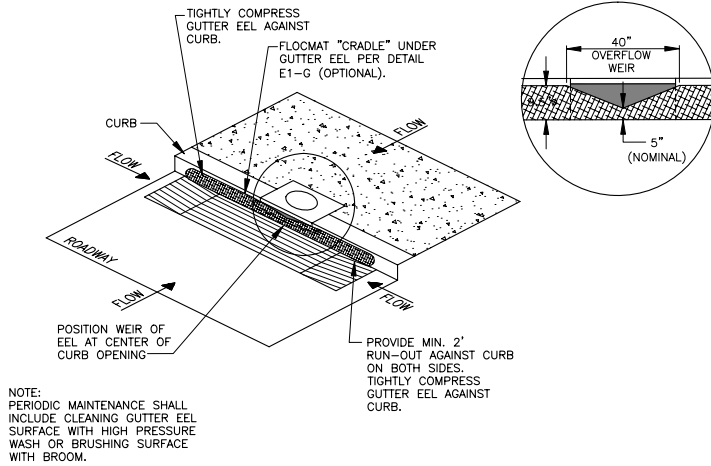

- 3.1.3 The GutterEEL™ should be cleaned if a visual inspection shows silt and debris build up in front of the unit.
- 3.1.4 The GutterEEL™ is reusable. Once the construction project is complete and it is no longer needed for sediment control, remove, clean and store out of the sunlight.
- 3.1.5 Ponding is possible if sediment is not removed regularly. Inspection of GutterEEL™ should be on a regular basis and immediately after major storm events.

Fabric Properties

Mechanical Properties	Test Method	Unit	Minimum Average Roll Value	
			MD	CD
Wide Width Tensile Strength	ASTM D 4595	kN/m (lbs/in)	40.273 (230)	39.398 (225)
Grab Tensile Strength	ASTM D 4632	kN (lbs)	1.78 (400)	1.491 (335)
Grab Tensile Elongation	ASTM D 4632	%	20	15
Trapezoid Tear Strength	ASTM D 4533	kN (lbs)	0.645 (145)	0.556 (125)
Mullen Burst Strength	ASTM D 3786	kPa (psi)	4478.5 (650)	
Puncture Strength	ASTM D 4833	kN (lbs)	0.556 (125)	
Apparent Opening Size (AOS)	ASTM D 4751	mm (U.S. Sieve)	0.60 (30)	
Percent Open Area	COE-22125	%	8	
Permittivity	ASTM D 4491	sec ⁻¹	1.5	
Permeability	ASTM D 4491	cm/sec	0.13	
Flow Rate	ASTM D 4491	l/min/m ² (gal/min/ft ²)	4685.1 (115)	
UV Resistance (at 500 hours)	ASTM D 4355	% strength retained	90	

Physical Properties	Test Method	Unit	Typical Value
Mass/Unit Area	ASTM D 5261	g/m ² (oz/yd ²)	271.2 (8.0)
Thickness	ASTM D 5199	mm (mils)	0.889 (35)
Roll Dimensions (width x length)	--	m (ft)	3.8 (12.5) x 91 (300)
Roll Area	--	m ² (yd ²)	348 (417)
Estimated Roll Weight	---	kg (lbs)	100 (221)

2.0 Materials

2.1 GutterEEL™

The GutterEEL™ shall be a synthetic filter manufactured from recycled shredded tires.

2.1.1 The GutterEEL™ will be manufactured to be 9" diameter with overflow weir in the center of the unit and is available in 6' and 9' lengths.

3.0 Construction Sequence

3.1 General

3.1.1 Install the GutterEEL™ in front of the curb inlet opening. Each end of the GutterEEL™ should overlap the curb inlet approximately 12".

3.1.2 Overflow weir should be centered on curb inlet. If more than 1 unit is required, units should be placed with each end flush against each other.

Clean Water Hydraulic Flow Rates

Flow through tube at maximum head at the invert of the overflow weir is 14 gpm/ft (53 liters per minute) length.

Flow through the trapezoidal weir is given as follows:

Flow Depth (inches)	Approximate Flow Through Weir Only (in gallons per minute for single weir opening)	Approximate Total Flow Range (in gallons per minute) for single weir plus flow through 9ft long Gutter EEL bag
1	10	135
2	50	175
3	135	260
4	250	375
5	500	625

ACF Environmental

"Complete Source for Stormwater Solutions"



2831 Cardwell Road
 Richmond, Virginia 23234
 (800) 448-3636 • FAX (804) 743-7779
 www.acfenvironmental.com

Distributed by:



(800) 644-9223
 www.thebmpstore.com

ACF Environmental

2831 Cardwell Road
Richmond, VA 23234
Sales: 1-800-448-3636
Corporate: 1-800-223-9021
Fax: 1-804-271-3074
www.acfenvironmental.com

Specification Sheet for the Gutter Eel

Product Description:

The Gutter Eel is a highly effective sediment-control product used at construction sites to prevent suspended soils from contaminating area streams and wetlands during storm events. It is a sediment tube filled with an effective filter ballast material, consisting of 100% shredded, recycled tire rubber.

Applications:

The Gutter Eel is used on any active construction site where soils have been disturbed. The Eel is used to filter runoff from construction sites at stormwater inlets.

Product Dimensions and Weights:

The Gutter Eel comes as a weighted sediment tube filter with a diameter of 9.5-inches (24-cm) on the ends, tapering to 5 inches (12.7-cm) diameter at the center. Manufactured lengths for the Gutter Eel are 6 feet (1.8 m) and 9 feet (2.7 m). The Gutter Eel has a built-in triangular overflow weir to evacuate excess flow during high-intensity storm events.

The unit weight per ft for the Gutter Eel is approximately 13 lbs/ft (19.4 kg/m).

Interior Filter Material:

Shredded, recycled used tire rubber particles. Greater than 98% of metal is removed from shredded rubber filtrate material. The rubber is washed during manufacturing.

Interior Filter Material Particle Size Gradation:

½ inch to ¾ inch particle size for the Gutter Eel.

Updated: June 4, 2008

1

Proud Member of



International Erosion Control Association



Geotextile Bag Specifications:

Mechanical Properties	Test Method	Unit	Minimum Average Roll Value	
			MD	CD
Wide Width Tensile Strength	ASTM D 4595	kN/m (lbs/in)	40.273 (230)	39.398 (225)
Grab Tensile Strength	ASTM D 4632	kN (lbs)	1.78 (400)	1.491 (335)
Grab Tensile Elongation	ASTM D 4632	%	20	15
Trapezoid Tear Strength	ASTM D 4533	kN (lbs)	0.645 (145)	0.556 (125)
Mullen Burst Strength	ASTM D 3786	kPa (psi)	4478.5 (650)	
Puncture Strength	ASTM D 4833	kN (lbs)	0.556 (125)	
Apparent Opening Size (AOS)	ASTM D 4751	mm (U.S. Sieve)	0.60 (30)	
Percent Open Area	COE-22125	%	8	
Permittivity	ASTM D 4491	sec ⁻¹	1.5	
Permeability	ASTM D 4491	cm/sec	0.13	
Flow Rate	ASTM D 4491	l/min/m ² (gal/min/ft ²)	4685.1 (115)	
UV Resistance (at 500 hours)	ASTM D 4355	% strength retained	90	

Physical Properties	Test Method	Unit	Typical Value
Mass/Unit Area	ASTM D 5261	g/m ² (oz/yd ²)	271.2 (8.0)
Thickness	ASTM D 5199	mm (mils)	0.889 (35)
Roll Dimensions (width x length)	--	m (ft)	3.8 (12.5) x 91 (300)
Roll Area	--	m ² (yd ²)	348 (417)
Estimated Roll Weight	---	kg (lbs)	100 (221)

Clean Water Hydraulic Flow Rates:

Flow through tube at maximum head at the invert of the overflow weir is 14 gpm/ft (53 liters per minute) length.

Flow through the trapezoidal weir is give as follows:

Flow Depth (inches)	Approximate Flow Through Weir Only (in gallons per minute for single weir opening)	Approximate Total Flow Range (in gallons per minute) for single weir plus flow through 9 ft long Gutter Eel bag
1	10	135
2	50	175
3	135	260
4	250	375
5	500	625

Installation Requirements:

Each Eel is designed with high-strength handles. One can move the Eels either manually (e.g., two individuals holding onto the handles at either ends of the Eel, or one person dragging the Eel by one of the end handles) or it can be moved mechanically using any number of different types of construction equipment. **Place the Gutter Eel along the opening of the inlet, maintaining open freeboard for the overflow weir. A minimum 12 inches of overlap on each end of the curb opening is required.**

Refer to the installation drawings provided by the distributor for more detailed installation requirements.

Storage Requirements:


It is recommended to keep the Eels stored either indoors or, if stored outside, keep the Eels covered to minimize UV exposure to prolong the geotextile life.

Expected Life:

Assuming there is no physical damage inflicted on the Eel from construction activities or vandalism, the service life of the Eel is estimated to be, on the average, approximately 2 years. This is based on the internal pore storage space within the Eel to trap particles under varied construction conditions. The overall maximum life is anticipated to be around 3 years.

Disclaimer/Warranty

Seller makes no warranty, expressed or implied, concerning the product furnished hereunder other than at the time of delivery it shall be of the quality and specification stated herein. Any implied warranty of fitness for a particular purpose is expressly excluded, and, to the extent that it is contrary to the foregoing sentence, any implied warranty of merchantability is expressly excluded. Any recommendations made by the Manufacturer/Seller concerning the use or application of said product are believed reliable and the Manufacturer /Seller makes no warranty of results to be obtained. If the product does not meet current Manufacturer-published specifications, and the customer gives notice to the Manufacturer/Seller before installing the product, then the Manufacturer/Seller will replace the product without charge or refund the purchase price.

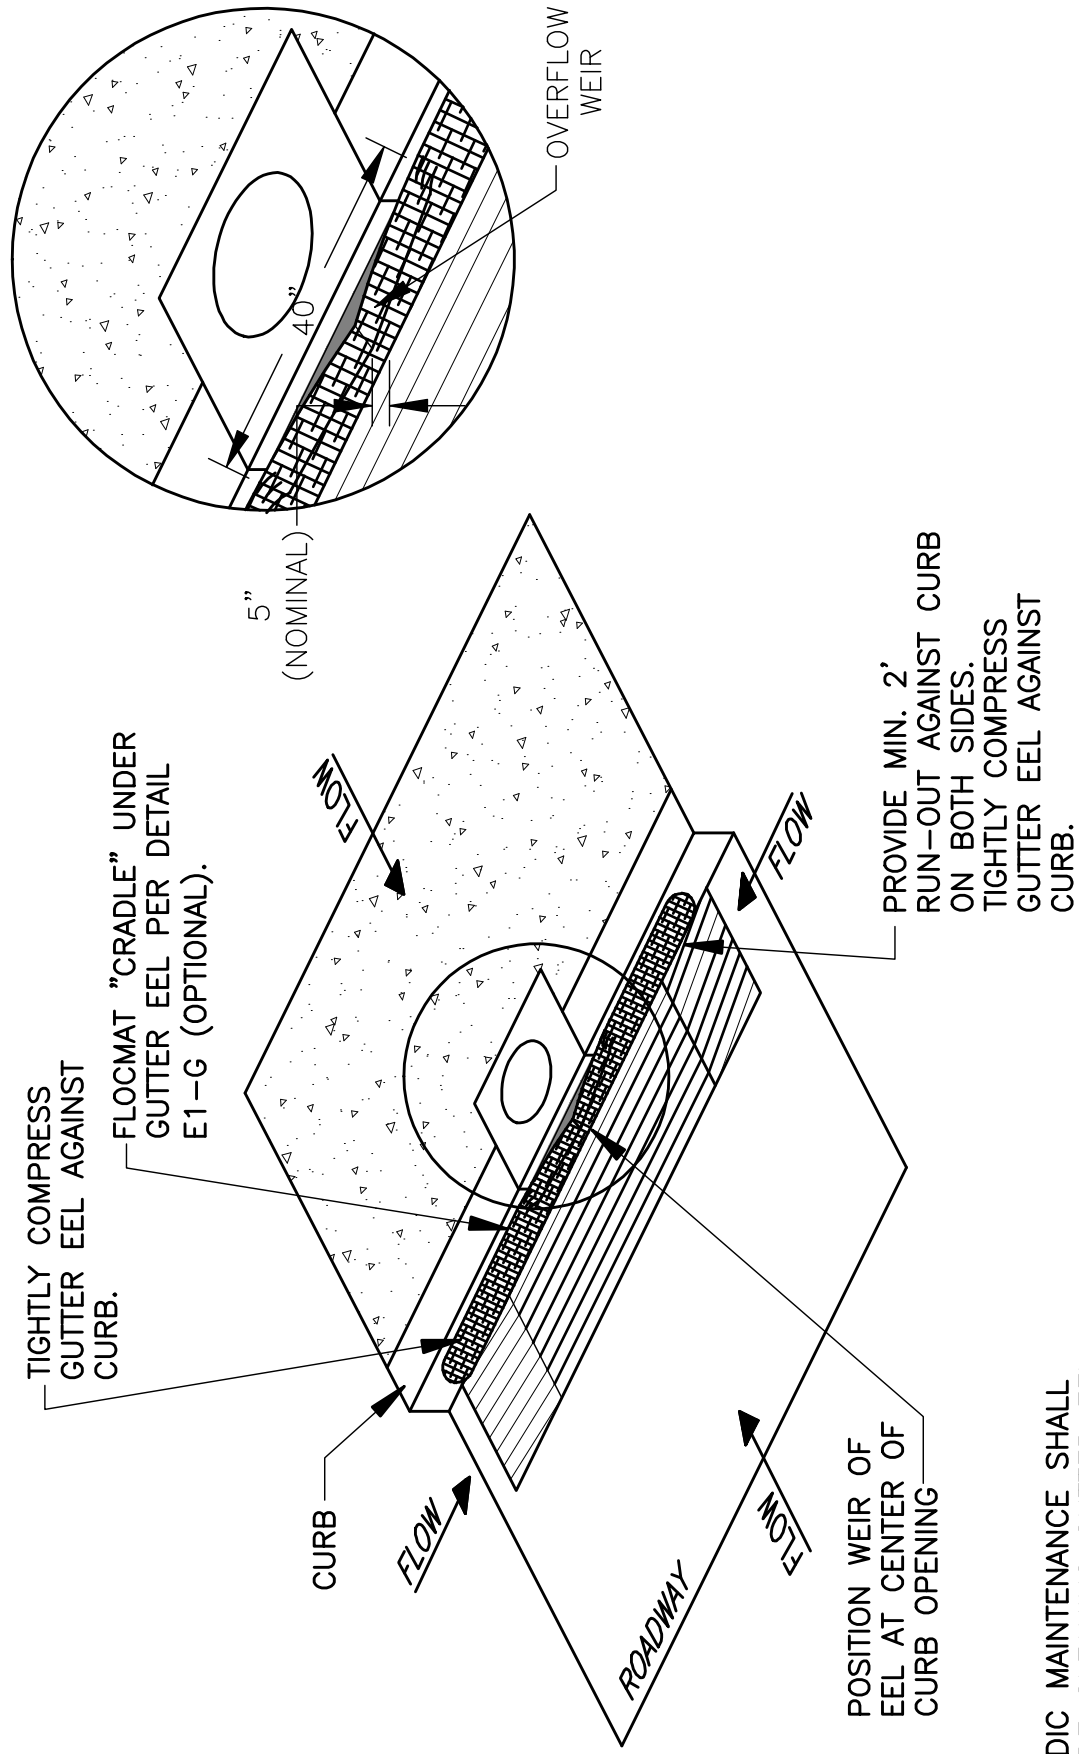

PROVIDE MIN. 2' RUN-OUT AGAINST CURB ON BOTH SIDES. TIGHTLY COMPRESS GUTTER EEL AGAINST CURB.

NOTE: PERIODIC MAINTENANCE SHALL INCLUDE CLEANING GUTTER EEL SURFACE WITH HIGH PRESSURE WASH OR BRUSHING SURFACE WITH BROOM.

ISOMETRIC DETAIL E3-C: SMALL CURB INLET SEDIMENT TRAP - GUTTER EEL N.T.S.

Silt Sack



SILTSACK®

(U.S. Patent #5,575,925)

Catch Basin Sediment Capture Device

Keeping catch basins free of silt!

Now Available
in High Visibility
Yellow

Versatile

Available in 2 styles to meet your needs:

- High flow
- Regular flow

And It's Simple

- Remove drain grate
- Insert Siltsack
- Replace grate to hold Siltsack in position
- Siltsack traps silt
- Remove filled Siltsack easily
- Clean and reuse or simply discard and replace

Are you looking for a cost-effective, easy way to stop silt and sediment from entering catch basins on construction site? Siltsack is the simple and economical solution to prevent clogging of catch basins.

Siltsack is a sediment control device used to prevent silt and sediment from entering your drainage system by catching the silt and sediment while allowing water to pass through freely. Siltsack can be used as a primary or secondary sediment control device to prevent failure of your drainage system due to clogging. It must be maintained on a regular basis to function properly.

Siltsack is available in both high-flow or regular flow. A modified Siltsack is also available with a curb opening deflector attached to prevent sediment and debris from entering through curb openings. Constructed with properties shown on the Specifications page, Siltsack is a quality product designed to save time and money.



Routine inspection of a Siltsack's collected sediment level is important to prevent "ponding" around storm drains. We recommend the following maintenance schedule:


- Each Siltsack should be inspected after every major rain event.
- If there have been no major events, Siltsack should be inspected every 2-3 weeks.
- The yellow restraint cord should be visible at all times. If the cord is covered with sediment, the Siltsack should be emptied.

Typical Siltsack® Construction




installed Siltsack held in place by grate.

Type A

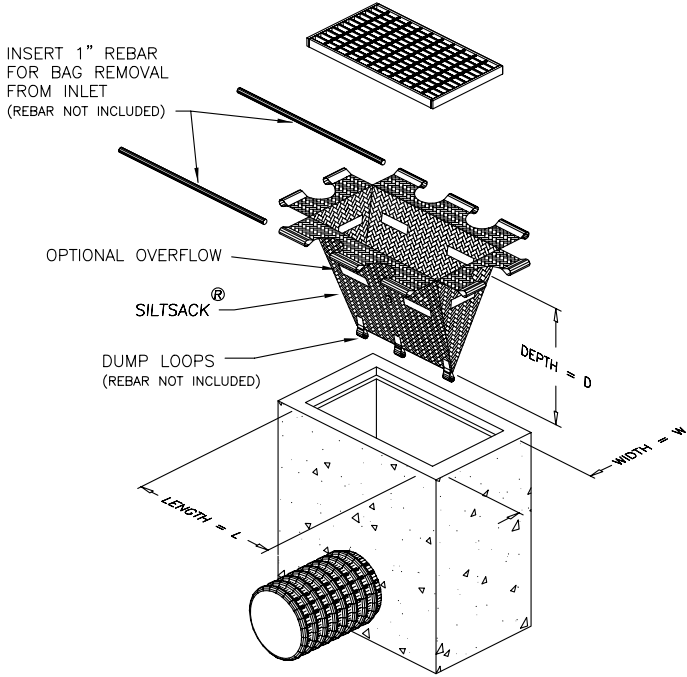

Type B

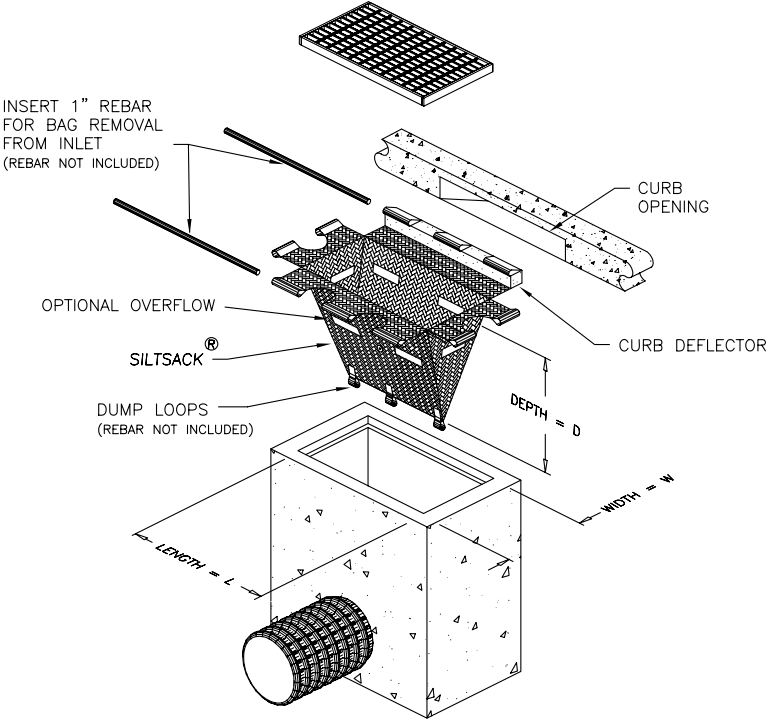

Sediment captured by Siltsack® can easily be removed from the site.

Siltsack® Specification

Control of Sediment Entering Catch Basins

(Storm Water Management)

1.0 Description

1.1 This work shall consist of furnishing, installing, maintaining, and removing Siltsack sediment control device as directed by the engineer or as shown on the site drawings. Siltsack sediment control device is manufactured by:

ACF Environmental, Inc.
 2831 Cardwell Road, Richmond, Virginia 23234
 Phone: 800-448-3636 • Fax: 804-743-7779
 www.acfenvironmental.com

2.0 Materials

2.1 Siltsack®

- 2.1.1** Siltsack shall be manufactured from a specially designed woven polypropylene geotextile and sewn by a double needle machine, using a high strength nylon thread.
- 2.1.2** Siltsack will be manufactured to fit the opening of the catch basin or drop inlet. Siltsack will have the following features: two dump straps attached at the bottom to facilitate the emptying of Siltsack; Siltsack shall have lifting loops as an integral part of the system to be used to lift Siltsack from the basin; Siltsack shall have a restraint cord approximately halfway up the sack to keep the sides away from the catch basin walls, this yellow cord is also a visual means of indicating when the sack should be emptied. Once the cord is covered with sediment, Siltsack should be emptied, cleaned and placed back into the basin.
- 2.1.3** Siltsack seams shall have a certified average wide width strength per ASTM D-4884 standards as follows:

Siltsack Style	Test Method	Test Method
Regular Flow	ASTM D-4884	165.0 lbs./in
Hi-Flow	ASTM D-4884	114.6 lbs./in

Siltsack Regular Flow

Property	Test Method	Units	Test Results
Grab Tensile	ASTM D-4632	lbs.	315x300
Grab Elongation	ASTM D-4632	%	15x15
Puncture	ASTM D-4833	lbs.	125
Mullen Burst	ASTM D-3786	P.S.I.	650
Trapezoid Tear	ASTM D-4533	lbs.	120x150
UV Resistance	ASTM D-4355	%	90
Apparent Opening	ASTM D-4751	US Sieve	40
Flow Rate	ASTM D-4491	Gal/Min/Ft ²	40
Permittivity	ASTM D-4491	sec ⁻¹	0.55

or SILTSACK® High Flow

Property	Specification	Units	Test Results
Material	Polypropylene		
Weight	5.6 oz/sq yd		
Color	Black		
Grab Tensile Strength	390lbs (530N)	lbs.	255x275
Grab Elongation (Max %)	30%	%	20x15
Traezoid Tear	120 lbs (250N) Min	lbs.	40x50
Puncture	140 lbs (250N) Min	lbs.	135
Mullen Burst	600 psi	P.S.I.	420
Coefficient of Permeability	0.04 in/sec		
Permittivity	0.3 gal/min/sq ft	sec ⁻¹	1.5
Water Flow Rate	152 gal/min/sq ft	gal/min/ft ²	200
AOS	0.212mm	US Seive	40
UV Resistance Strength	90%		
Fabric Width	72"		

All properties are Minimum Average Roll Values (MARV)

3.0 Construction Sequence

3.1 General

- 3.1.1** To install Siltsack in the catch basin, remove the grate and place the sack in the opening. Hold approximately six inches of the sack outside the frame. This is the area of the lifting straps. Replace the grate to hold the sack in place.
- 3.1.2** When the restraint cord is no longer visible, Siltsack is full and should be emptied.
- 3.1.3** To remove Siltsack, take two pieces of 1" diameter rebar and place through the lifting loops on each side of the sack to facilitate the lifting of Siltsack.
- 3.1.4** To empty Siltsack, place unit where the contents will be collected. Place the rebar through the lift straps (connected to the bottom of the sack) and lift. This will lift Siltsack from the bottom and empty the contents. Clean out and rinse. Return Siltsack to its original shape and place back in the basin.
- 3.1.5** Siltsack is reusable. Once the construction cycle is complete, remove Siltsack from the basin and clean. Siltsack should be stored out of sunlight until next use.

4.0 Basis of Payment

- 4.1** Payment for all Siltsacks used during construction is to be included in the bid price for the overall erosion and sediment control plan unless unit price is requested. Maintenance of Siltsack also to be included in this price.

**Silt sack is covered by U.S. Patent No. 5,575,925.*

Installation and Maintenance



Remove grate from catch basin.



Slide Siltsack® over one side of grate.



Slide Siltsack® over opposite side of grate.



Replace Siltsack® and grate inlet into recess.



Installed Siltsack®.



To remove Siltsack®, clean area around grate and slide rebar through Siltsack® pockets.



Slowly remove Siltsack® from inlet.



Removed Siltsack® is now ready for cleanout.



To clean Siltsack® attach rebar through empty loops at bottom and lift to empty.




2831 Cardwell Road
Richmond, Virginia 23234
(800) 448-3636 • FAX (804) 743-7779
www.acfenvironmental.com

ACF Environmental
“Complete Source for Stormwater Solutions”

Distributed by:



(800) 644-9223
www.thebmpstore.com

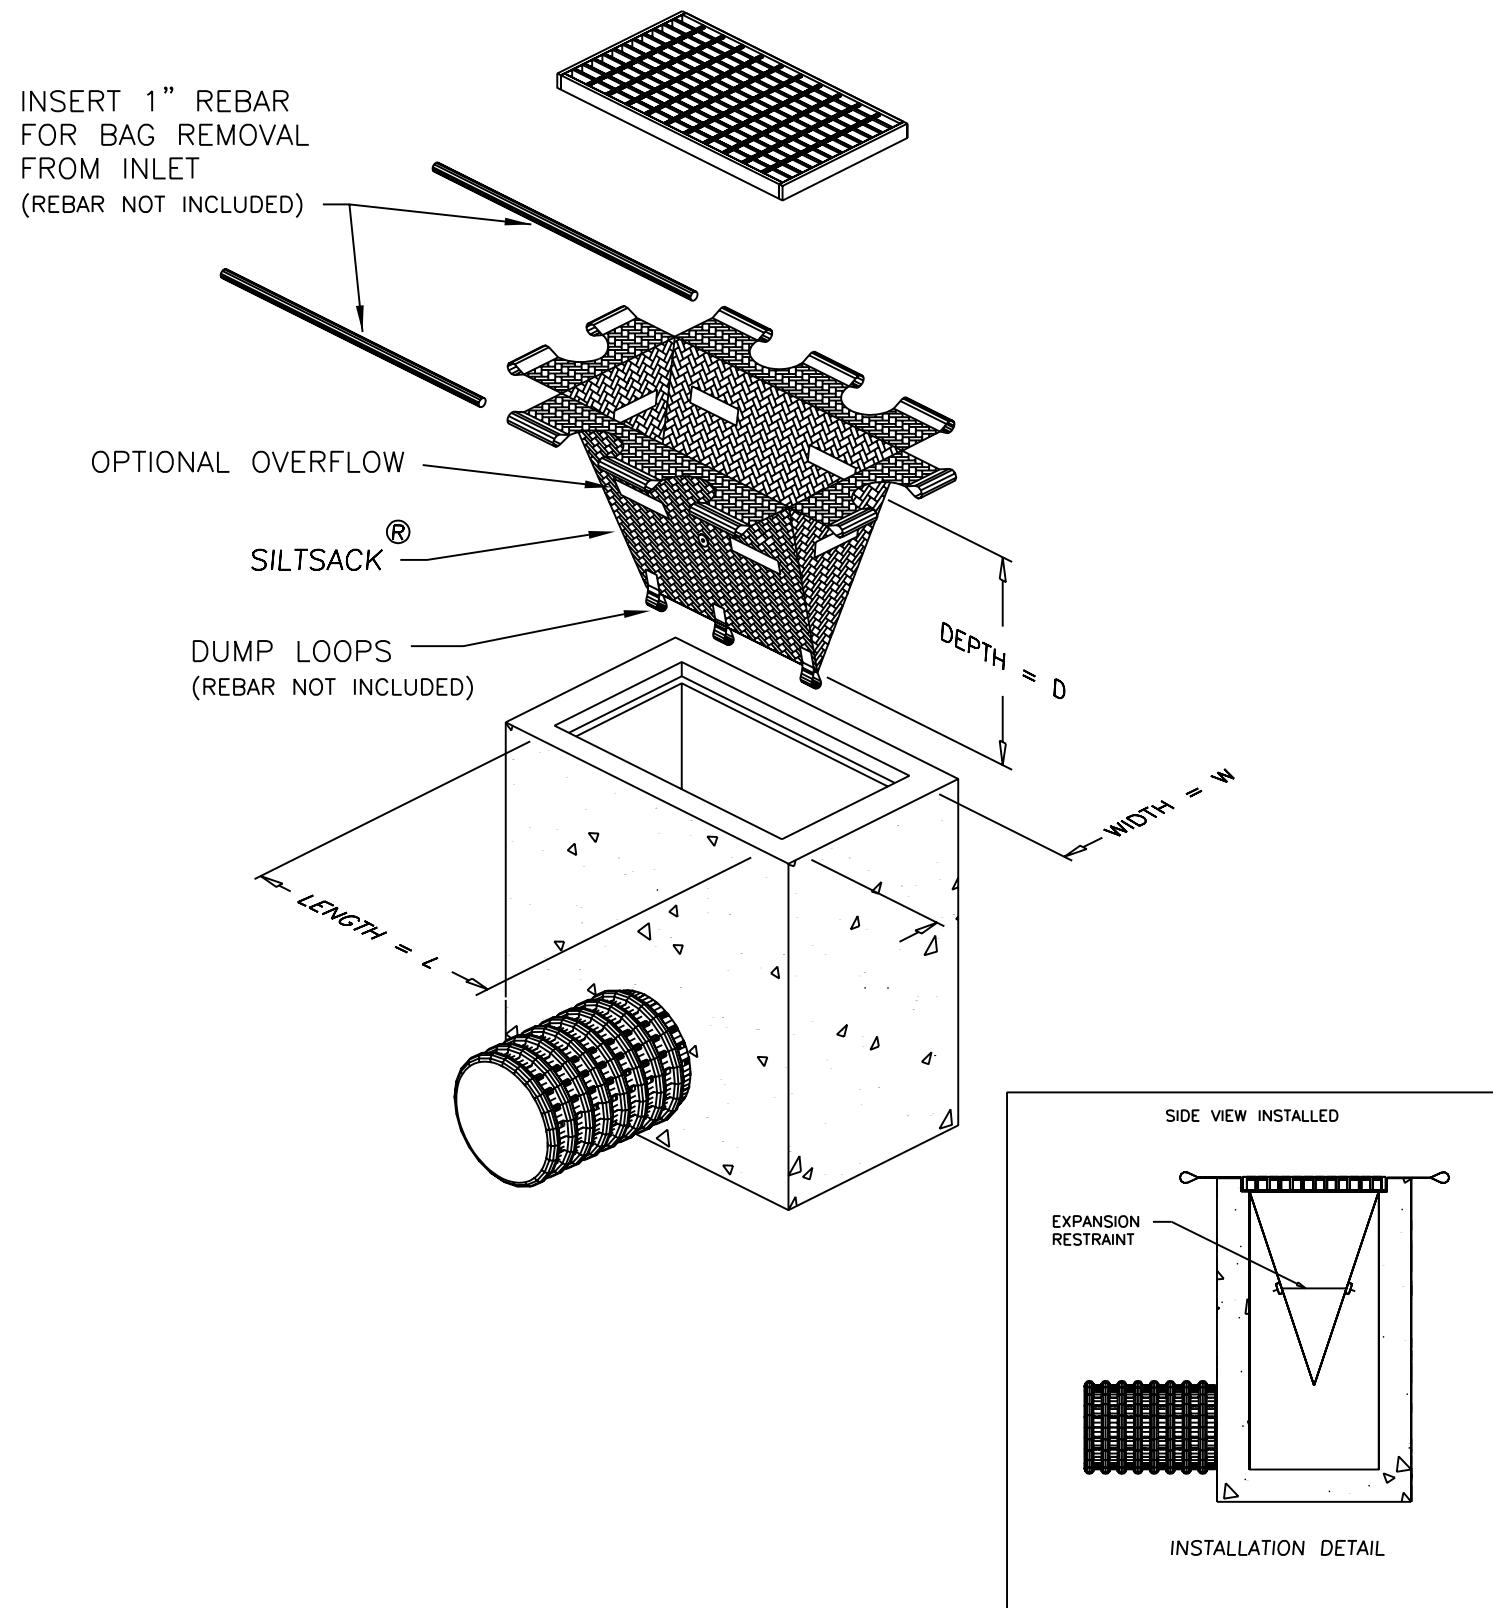

DETAIL OF INLET SEDIMENT CONTROL DEVICE
TYPE A – WITHOUT CURB DEFLECTOR

SILTSACK®
SPECIFICATIONS

NOTE: THE SILTSACK® WILL BE MANUFACTURED FROM A WOVEN POLYPROPYLENE FABRIC THAT MEETS OR EXCEEDS THE FOLLOWING SPECIFICATIONS.

REGULAR FLOW SILTSACK®

(FOR AREAS OF LOW TO MODERATE PRECIPITATION AND RUN-OFF)

PROPERTIES	TEST METHOD	UNITS
GRAB TENSILE STRENGTH	ASTM D-4632	300 LBS
GRAB TENSILE ELONGATION	ASTM D-4632	20 %
PUNCTURE	ASTM D-4833	120 LBS
MULLEN BURST	ASTM D-3786	800 PSI
TRAPEZOID TEAR	ASTM D-4533	120 LBS
UV RESISTANCE	ASTM D-4355	80 %
APPARENT OPENING SIZE	ASTM D-4751	40 US SIEVE
FLOW RATE	ASTM D-4491	40 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491	0.55 SEC -1

HI-FLOW SILTSACK®


(FOR AREAS OF MODERATE TO HEAVY PRECIPITATION AND RUN-OFF)

PROPERTIES	TEST METHOD	UNITS
GRAB TENSILE STRENGTH	ASTM D-4632	265 LBS
GRAB TENSILE ELONGATION	ASTM D-4632	20 %
PUNCTURE	ASTM D-4833	135 LBS
MULLEN BURST	ASTM D-3786	420 PSI
TRAPEZOID TEAR	ASTM D-4533	45 LBS
UV RESISTANCE	ASTM D-4355	90 %
APPARENT OPENING SIZE	ASTM D-4751	20 US SIEVE
FLOW RATE	ASTM D-4491	200 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491	1.5 SEC -1

OIL-ABSORBANT SILTSACK®

(FOR AREAS WHERE THERE IS A CONCERN FOR OIL RUN-OFF OR SPILLS)

DEPENDING ON YOUR PARTICULAR APPLICATION, THE SILTSACK CAN BE MADE FROM EITHER ONE OF THE ABOVE FABRICS WITH AN OIL-ABSORBANT PILLOW INSERT OR, MADE COMPLETELY FROM AN OIL-ABSORBANT SILTSACK WITH A WOVEN PILLOW INSERT.

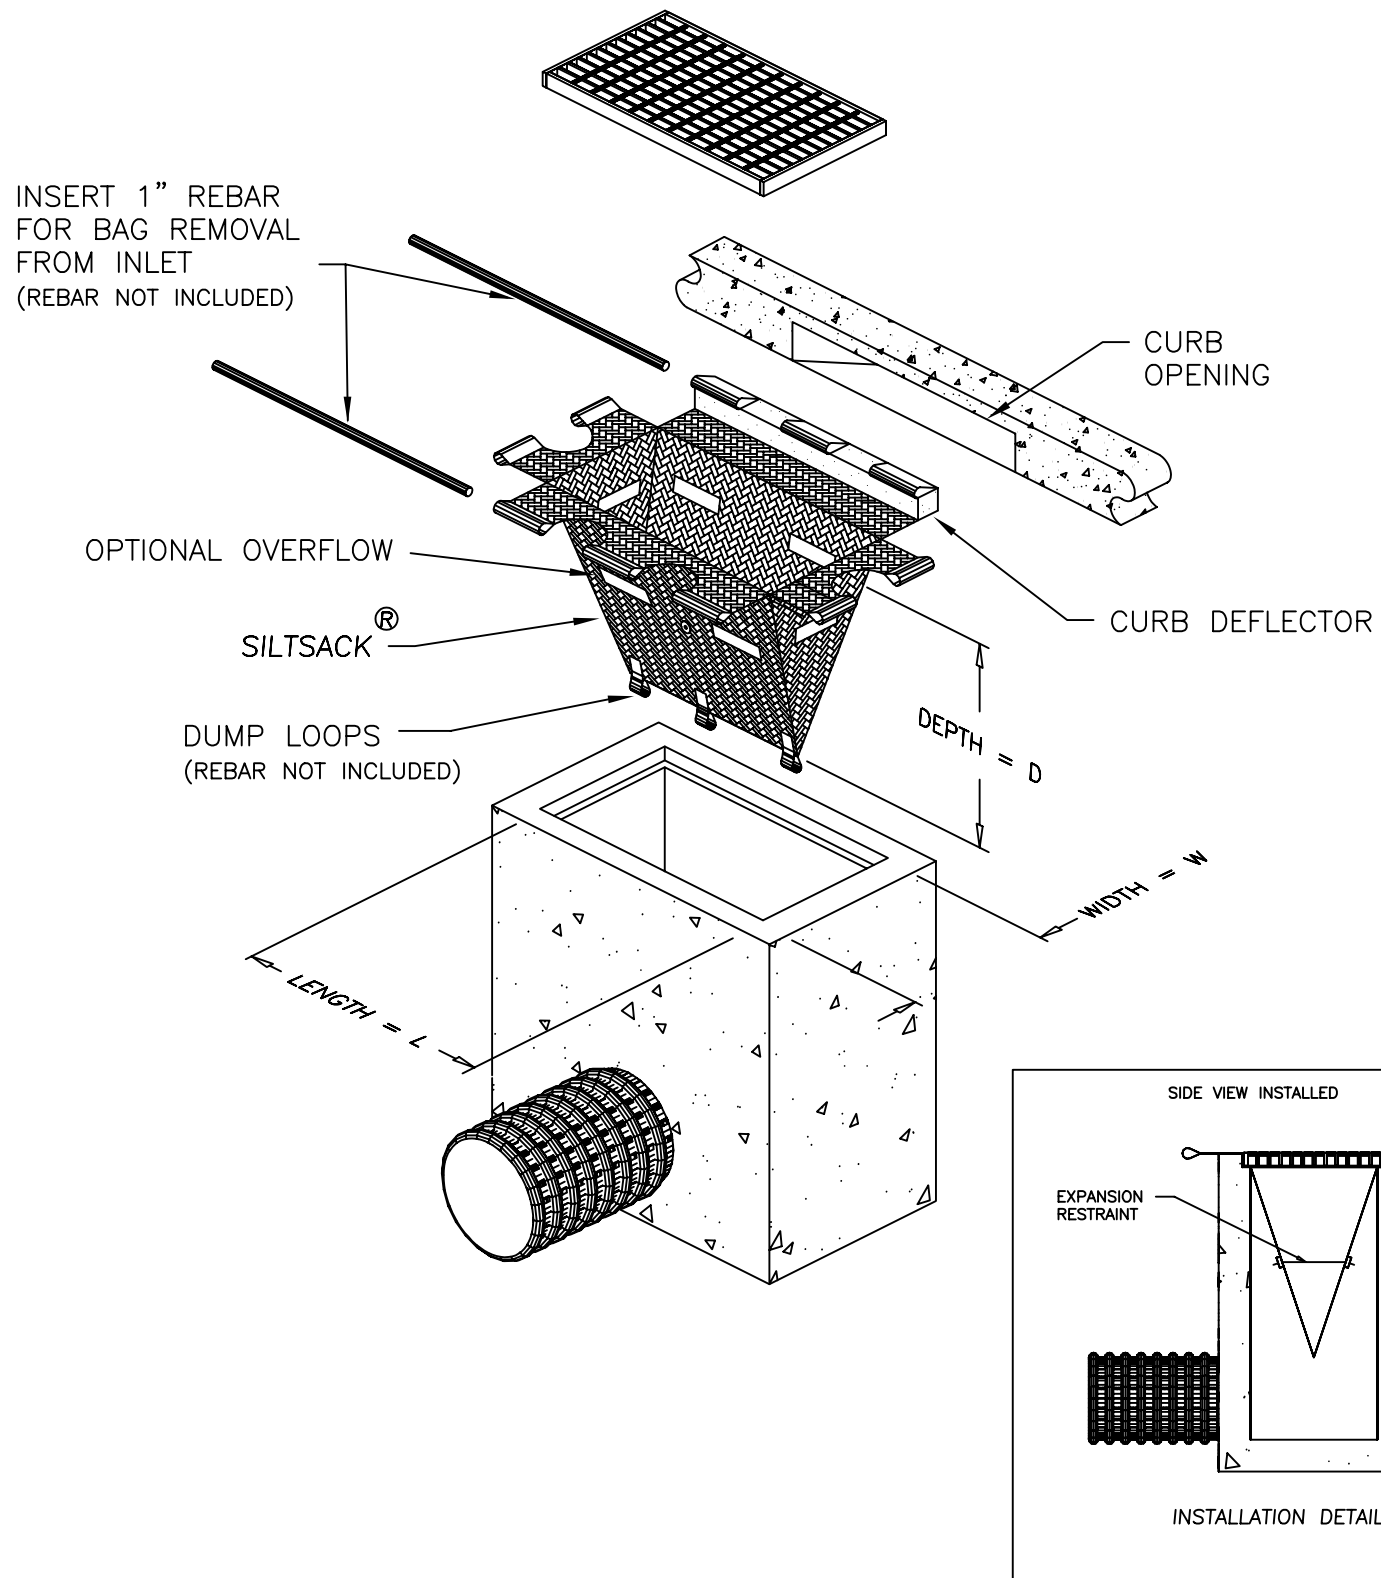

SILTSACK® SPECIFICATIONS

NOTE: THE SILTSACK® WILL BE MANUFACTURED FROM A WOVEN POLYPROPYLENE FABRIC THAT MEETS OR EXCEEDS THE FOLLOWING SPECIFICATIONS.

REGULAR FLOW SILTSACK®

(FOR AREAS OF LOW TO MODERATE PRECIPITATION AND RUN-OFF)

PROPERTIES	TEST METHOD	UNITS
GRAB TENSILE STRENGTH	ASTM D-4632	300 LBS
GRAB TENSILE ELONGATION	ASTM D-4632	20 %
PUNCTURE	ASTM D-4833	120 LBS
MULLEN BURST	ASTM D-3786	800 PSI
TRAPEZOID TEAR	ASTM D-4533	120 LBS
UV RESISTANCE	ASTM D-4355	80 %
APPARENT OPENING SIZE	ASTM D-4751	40 US SIEVE
FLOW RATE	ASTM D-4491	40 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491	0.55 SEC -1

HI-FLOW SILTSACK®

(FOR AREAS OF MODERATE TO HEAVY PRECIPITATION AND RUN-OFF)


PROPERTIES	TEST METHOD	UNITS
GRAB TENSILE STRENGTH	ASTM D-4632	265 LBS
GRAB TENSILE ELONGATION	ASTM D-4632	20 %
PUNCTURE	ASTM D-4833	135 LBS
MULLEN BURST	ASTM D-3786	420 PSI
TRAPEZOID TEAR	ASTM D-4533	45 LBS
UV RESISTANCE	ASTM D-4355	90 %
APPARENT OPENING SIZE	ASTM D-4751	20 US SIEVE
FLOW RATE	ASTM D-4491	200 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491	1.5 SEC -1

OIL-ABSORBANT SILTSACK®

(FOR AREAS WHERE THERE IS A CONCERN FOR OIL RUN-OFF OR SPILLS)

DEPENDING ON YOUR PARTICULAR APPLICATION, THE SILTSACK CAN BE MADE FROM EITHER ONE OF THE ABOVE FABRICS WITH AN OIL-ABSORBANT PILLOW INSERT OR, MADE COMPLETELY FROM AN OIL-ABSORBANT SILTSACK WITH A WOVEN PILLOW INSERT.

DETAIL OF INLET SEDIMENT CONTROL DEVICE
TYPE B – WITH CURB DEFLECTOR

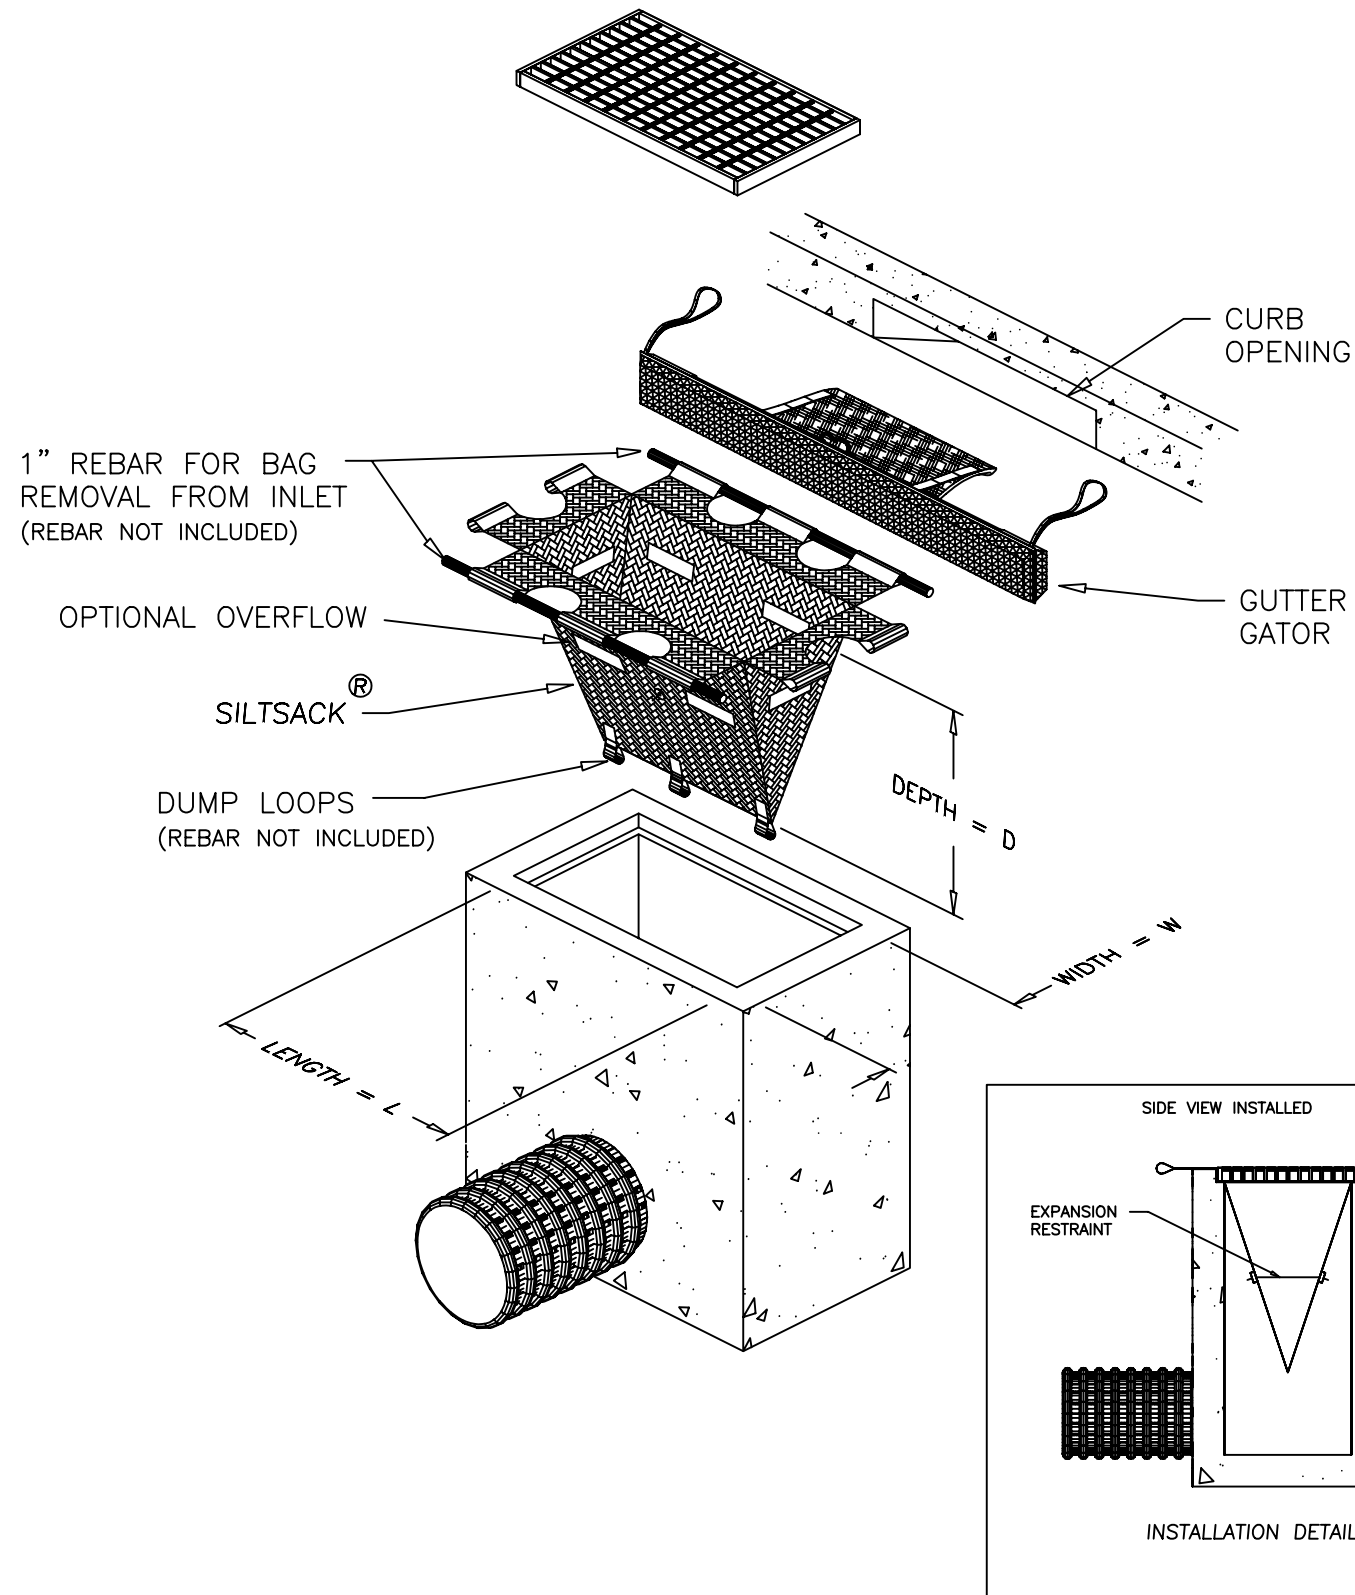

SILTSACK® GUTTER GATOR® COMBINATION
SPECIFICATIONS

NOTE: THE SILTSACK® WILL BE MANUFACTURED FROM A WOVEN POLYPROPYLENE FABRIC THAT MEETS OR EXCEEDS THE FOLLOWING SPECIFICATIONS.

REGULAR FLOW SILTSACK®

(FOR AREAS OF LOW TO MODERATE PRECIPITATION AND RUN-OFF)

PROPERTIES	TEST METHOD	UNITS	
GRAB TENSILE STRENGTH	ASTM D-4632		300 LBS
GRAB TENSILE ELONGATION	ASTM D-4632		20 %
PUNCTURE	ASTM D-4833		120 LBS
MULLEN BURST	ASTM D-3786		800 PSI
TRAPEZOID TEAR	ASTM D-4533		120 LBS
UV RESISTANCE	ASTM D-4355		80 %
APPARENT OPENING SIZE	ASTM D-4751		40 US SIEVE
FLOW RATE	ASTM D-4491		40 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491		0.55 SEC -1

HI-FLOW SILTSACK®

(FOR AREAS OF MODERATE TO HEAVY PRECIPITATION AND RUN-OFF)

PROPERTIES	TEST METHOD	UNITS	
GRAB TENSILE STRENGTH	ASTM D-4632		265 LBS
GRAB TENSILE ELONGATION	ASTM D-4632		20 %
PUNCTURE	ASTM D-4833		135 LBS
MULLEN BURST	ASTM D-3786		420 PSI
TRAPEZOID TEAR	ASTM D-4533		45 LBS
UV RESISTANCE	ASTM D-4355		90 %
APPARENT OPENING SIZE	ASTM D-4751		20 US SIEVE
FLOW RATE	ASTM D-4491		200 GAL/MIN/SQ FT
PERMITTIVITY	ASTM D-4491		1.5 SEC -1

OIL-ABSORBANT SILTSACK®

(FOR AREAS WHERE THERE IS A CONCERN FOR OIL RUN-OFF OR SPILLS)



DEPENDING ON YOUR PARTICULAR APPLICATION, THE SILTSACK CAN BE MADE FROM EITHER ONE OF THE ABOVE FABRICS WITH AN OIL-ABSORBANT PILLOW INSERT OR, MADE COMPLETELY FROM AN OIL-ABSORBANT SILTSACK WITH A WOVEN PILLOW INSERT.

DETAIL OF INLET SEDIMENT CONTROL DEVICE
WITH GUTTER GATOR

Dandy Bag



> DANDY BAG® <

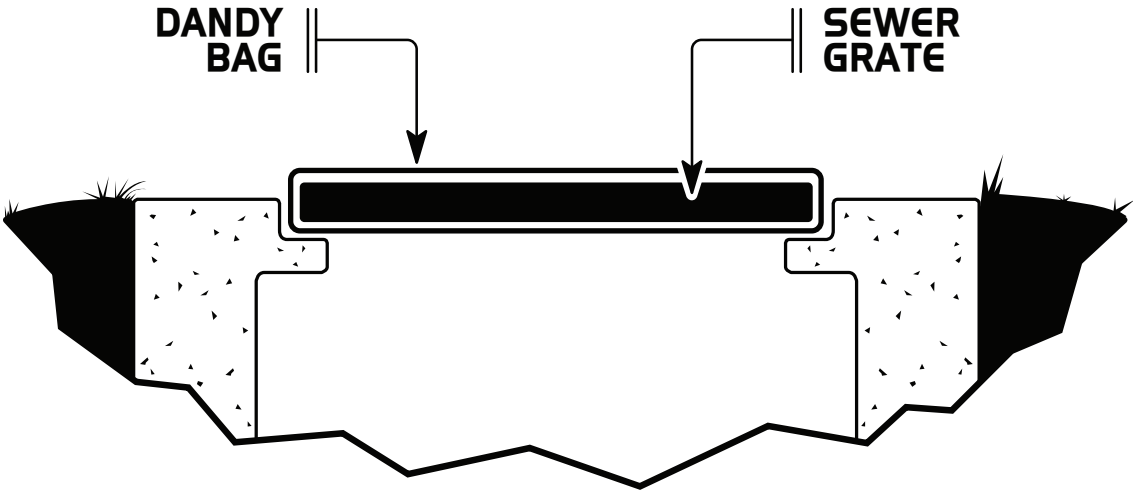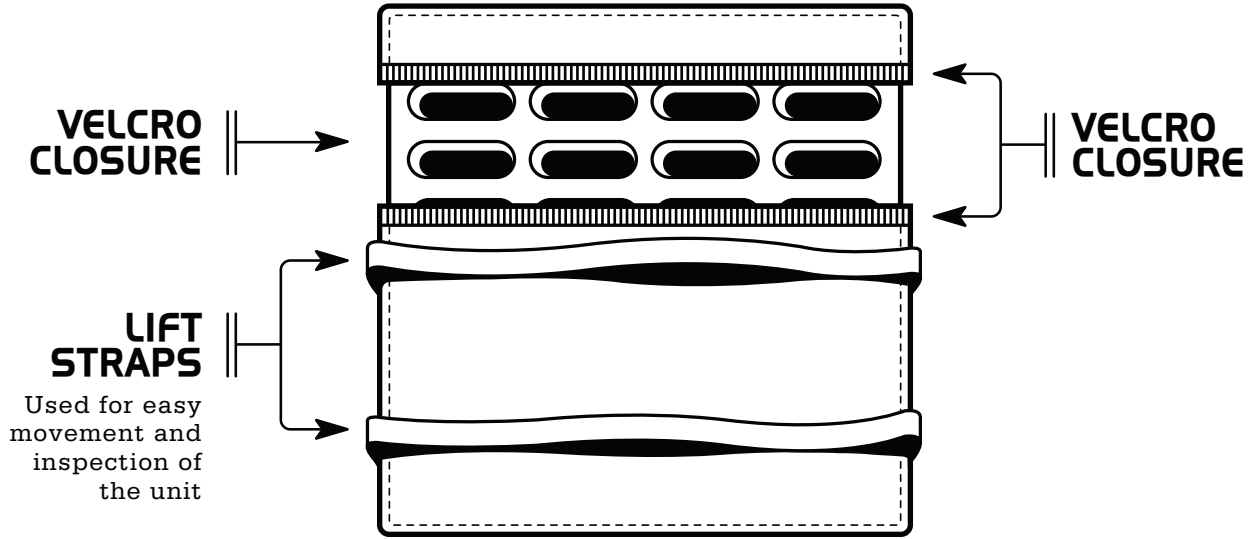

DANDY BAG®

INLET PROTECTION SYSTEM GUIDE SPECIFICATION

PRODUCT:

DANDY BAG®

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Bag® inlet protection system. The purpose is to keep silt, sediment and construction debris out of the storm water system.

2.0 Material:

2.1 The Dandy Bag® inlet protection unit shall be a **sewn in the U.S.A.** geotextile fabric unit fitted to the individual grate(s) and completely enclosing the grate(s).

2.2 The Dandy Bag® shall have lifting devices to allow manual inspection of the storm water system.

2.3 The Dandy Bag® unit shall utilize an orange monofilament fabric manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 X 300
Elongation	ASTM D 4632	%	40% X 25%
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5
Permeability	ASTM 4491	cm/sec	0.25
Water Flow Rate	ASTM 4491	gal/min/ft ²	250
Ultraviolet Resistance	ASTM D 4355	%	70
Color			Orange ¹

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 Installation:

- 3.1 Place the empty Dandy Bag® over the grate as the grate stands on end.
- 3.2 *For oil and sediment model; to install or replace absorbent, place absorbent pillow in pouch, on the bottom (below-grade side) of the unit.*
- 3.3 Tuck the enclosure flap inside to completely enclose the grate.
- 3.4 Holding the lifting devices, insert the grate into the inlet being careful not to damage the Dandy Bag® unit.

4.0 Maintenance:

- 4.1 The contractor shall remove all accumulated sediment and debris from surface and vicinity of unit after each rain event or as directed by engineer/inspector. Dispose of unit no longer in use at an appropriate recycling or solid waste facility.
- 4.2 *For oil and sediment model; remove and replace absorbent when near saturation.*

5.0 Method of Measurement:

- 5.1 The quantity to be paid is for the actual number of Dandy Bag® inlet protection units installed

6.0 Basis of Payment:


- 6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the Dandy Bag® inlet protection units.
- 6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Bag®	EA	Inlet Protection Unit (# _____ Inlet)

Dandy Curb



▶ **DANDY CURB™** ◀

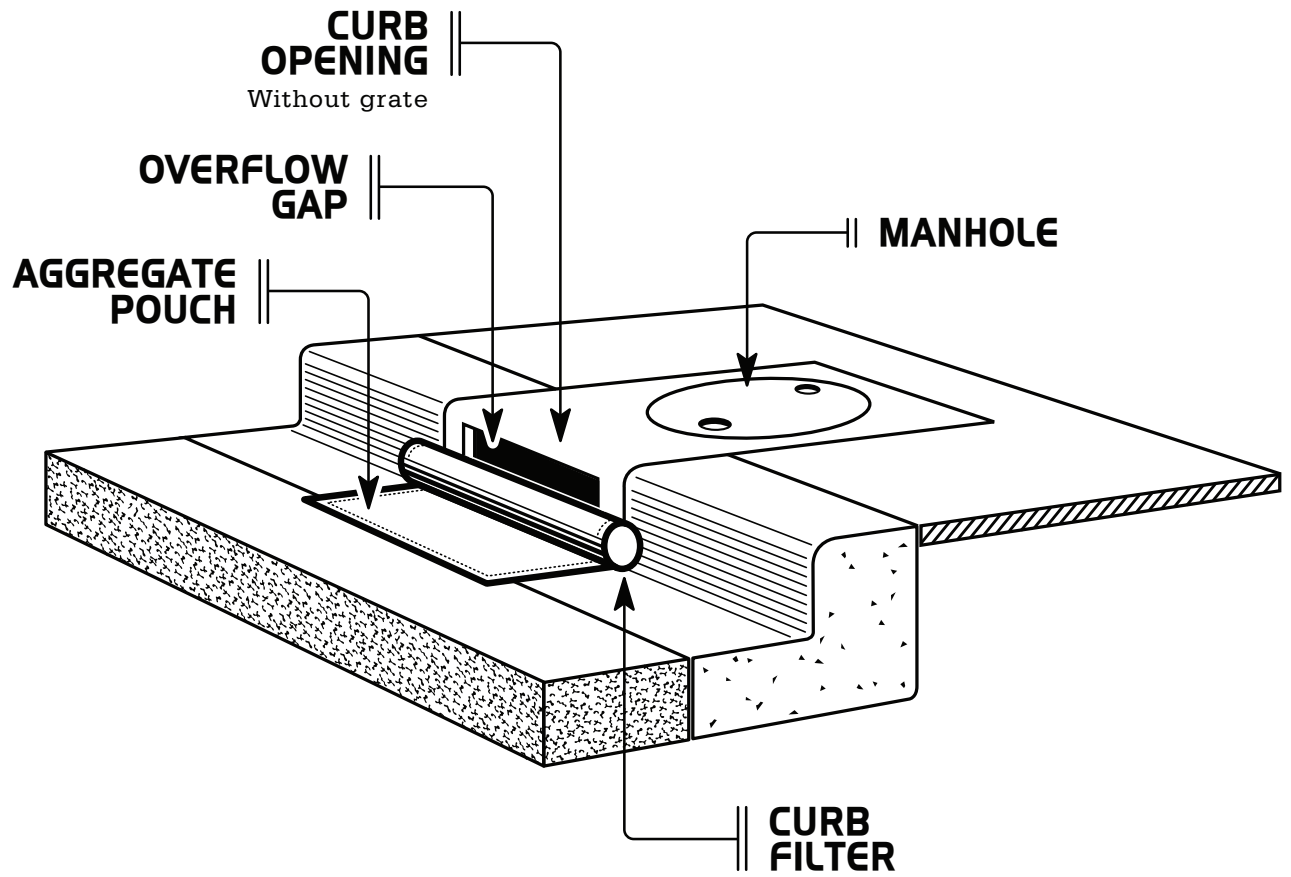

DANDY CURB®
GRATELESS CURB INLET AND MEDIAN BARRIER INLET
PROTECTION SYSTEM GUIDE SPECIFICATION

PRODUCT:

DANDY CURB®

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Curb® inlet protection system for inlets and median barrier inlets without grates. The purpose is to keep silt, sediment and construction debris out of the storm system.

2.0 Material:

2.1 The Dandy Curb® inlet protection system shall be a **sewn in the U.S.A.** fabric unit enclosing a porous structure in the form of a cylindrical tube placed in front of and extending beyond the inlet opening on both sides.

2.2 The Dandy Curb® inlet protection system shall have a pouch on the street side of the sewn unit for aggregate or other material to hold the unit in place.

2.3 The Dandy Curb® unit shall utilize an orange monofilament fabric that is manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 x 300
Grab Tensile Elongation	ASTM D 4632	%	40 x 25
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5
Permeability	ASTM 4491	cm/sec	0.25
Water Flow Rate	ASTM 4491	gal/min/ft ²	250
Ultraviolet Resistance	ASTM D 4355	%	70

Color			Orange ¹
-------	--	--	---------------------

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 Installation:

3.1 Place Dandy Curb® inlet protection unit on ground with aggregate pouch on street side near inlet it will be installed on.

3.2 *For oil and sediment model, to install or replace absorbent, place absorbent sock in pouch.*

3.3 Fill pouch with aggregate such as #5-7, 8's or similar to a level (at least ½ full) that will keep unit in place during a rain event and create a seal between the Dandy Curb® and the surface of the street. Reseal Velcro access.

3.4 Center the unit against curb or median inlet opening so that the curb side of the unit creates a seal with the curb or median barrier and inlet structure. There will be approximately twelve (12) inches of the inlet protection unit overhanging on each side of the opening. If the unit is not installed in this manner, it will not function properly.

4.0 Maintenance:

4.1 The contractor shall remove all accumulated sediment and debris from surface and vicinity of unit after each rain event or as directed by engineer/inspector. Dispose of unit no longer in use at an appropriate recycling or solid waste facility.

4.2 *For oil and sediment model; remove and replace absorbent when near saturation.*

5.0 Method of Measurement:

5.1 The quantity to be paid is for the actual number of Dandy Curb® inlet protection units installed.

6.0 Basis of payment:


6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the True Dam® inlet protection units.

6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Curb®	EA	Inlet Protection Unit (#_____Inlet)



▶ **DANDY CURB BAG™** ◀

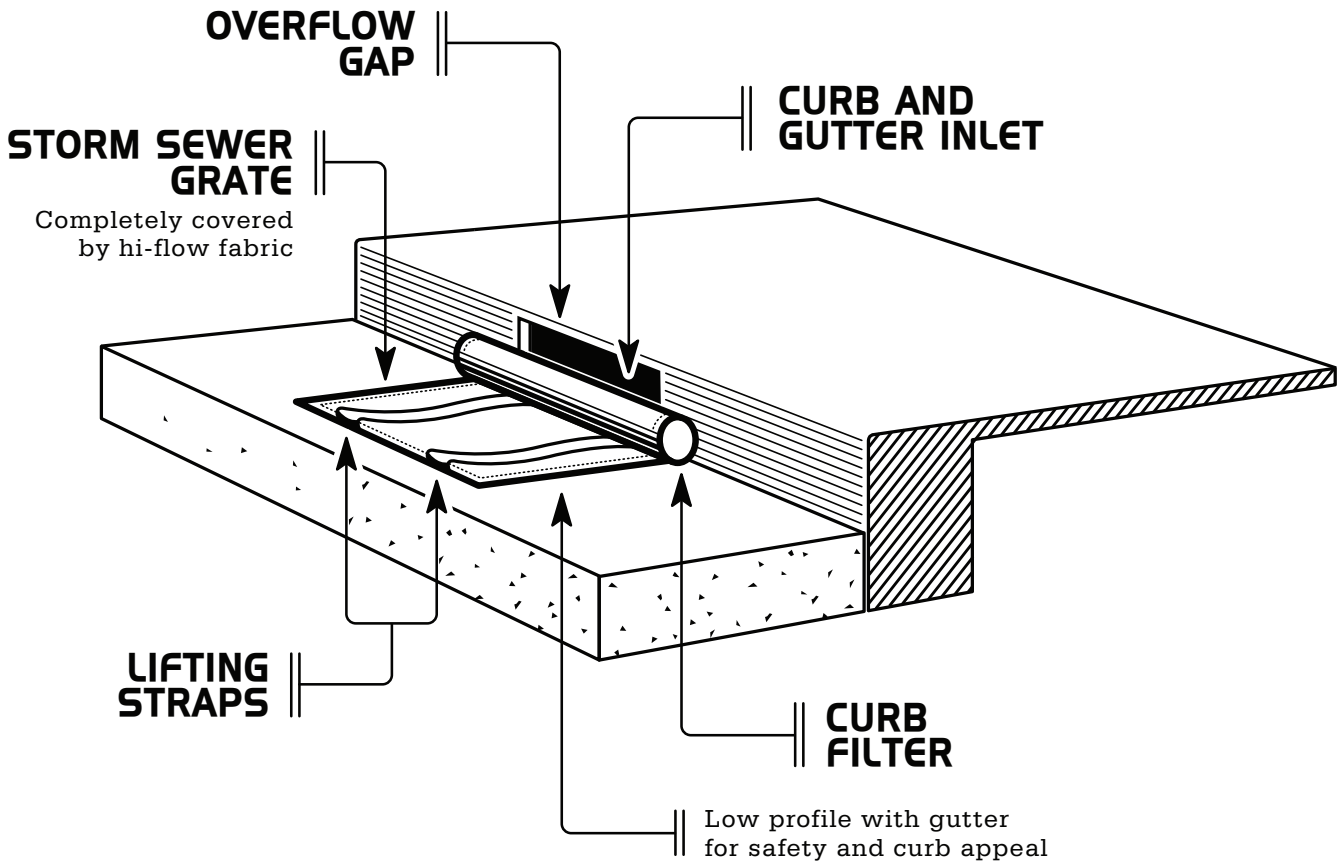

DANDY CURB BAG® CURB AND GUTTER INLET/GRATE PROTECTION SYSTEM GUIDE SPECIFICATION

PRODUCT:

DANDY CURB BAG®

MANUFACTURER:

Dandy Products, Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E-mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Curb Bag® curb and gutter inlet protection system. The purpose is to keep silt, sediment and construction debris out of the storm water system.

2.0 Material:

2.1 The Dandy Curb Bag® curb and gutter inlet protection unit shall be a **sewn in the U.S.A.** geotextile fabric unit enclosing a porous structure in the form of a cylindrical tube placed in front of and extending beyond the inlet opening on both sides and have a geotextile fabric envelope fitted to the individual grate(s) on the street side of the sewn unit for grate(s) to be inserted and to completely enclose the grate(s).

2.2 The Dandy Curb Bag® shall have lifting devices to allow manual inspection of the storm water system.

2.3 The Dandy Curb Bag® unit shall utilize an orange monofilament fabric that is manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 x 300
Grab Tensile Elongation	ASTM D 4632	%	40 x 25
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5

Permeability	ASTM 4491	cm/sec	0.25
Water Flow Rate	ASTM 4491	gal/min/ft ²	250
Ultraviolet Resistance	ASTM D 4355	%	70
Color			Orange ¹

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 Installation:

3.1 Place the empty Dandy Curb Bag® unit over the grate as the grate stands on end.

3.2 *For oil and sediment model; to install or replace absorbent, place absorbent pillow in pouch, on the bottom (below-grade side) of the unit.*

3.3 Tuck the enclosure flap inside to completely enclose the grate.

3.4 Holding the lifting devices, being careful not to damage the sewn fabric unit, insert the grate into its frame, street side edge first, then lower back edge with cylindrical tube into place. The cylindrical tube should be partially blocking the curb hood opening when installed properly.

4.0 Maintenance:

4.1 The contractor shall remove all accumulated sediment and debris from surface and vicinity of unit after each rain event or as directed by engineer/inspector. Dispose of unit no longer in use at an appropriate recycling or solid waste facility.

4.2 *For oil and sediment model; remove and replace absorbent when near saturation.*

5.0 Method of Measurement:

5.1 The quantity to be paid is for the actual number of Dandy Curb Bag® inlet protection units installed

6.0 Basis of payment:

6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the Dandy Curb Bag® inlet protection units.


6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Curb Bag®	EA	Curb Inlet Protection Unit (#_____Inlet)

Dandy Curb Sack



▶ **DANDY CURB SACK™** ◀

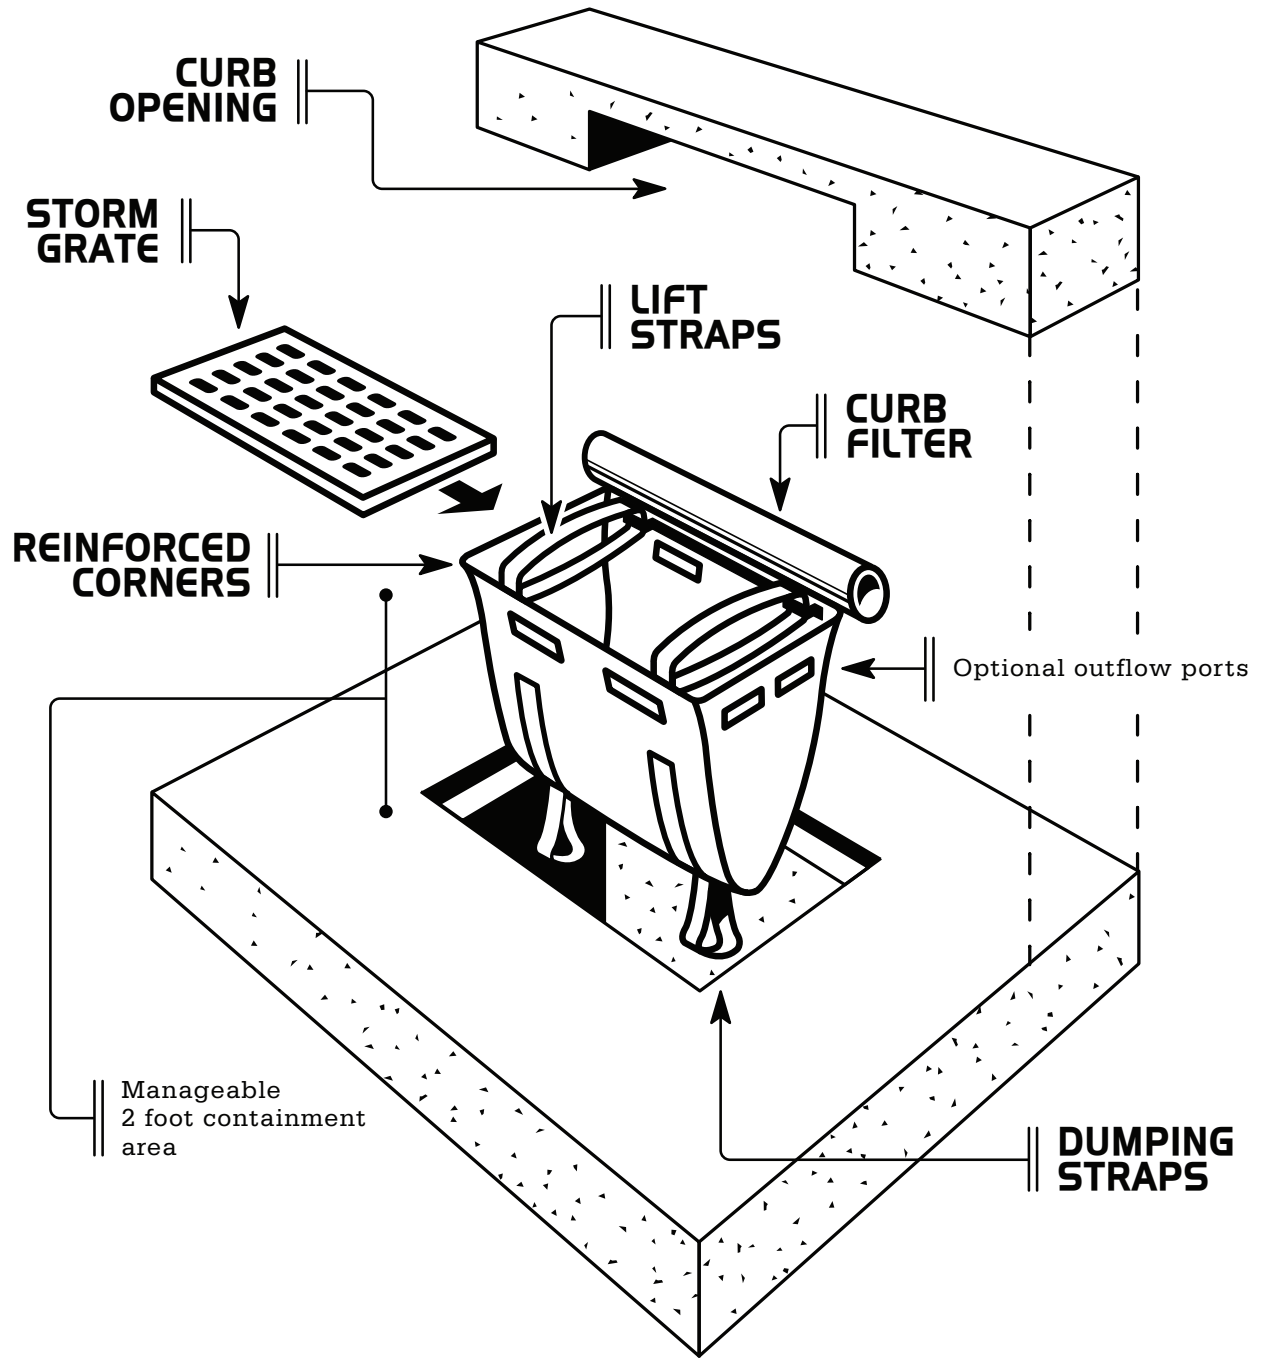

DANDY CURB SACK®
CURB AND GUTTER INLET PROTECTION SYSTEM GUIDE
SPECIFICATION

PRODUCT:

DANDY CURB SACK®

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Curb Sack® curb and gutter inlet protection system. The purpose is to keep silt, sediment and construction debris out of the storm water system.

2.0 Material:

2.1 The Dandy Curb Sack® curb and gutter inlet protection unit shall be a sewn geotextile fabric unit **made in the U.S.A.** enclosing a porous structure in the form of a cylindrical tub placed in front and extending beyond the inlet opening on both sides and have a geotextile fabric sack attached designed to fit the opening of the catch basin or drop inlet and to hang underneath the grate and into the catch basin.

2.2 The Dandy Curb Sack® shall have lifting straps to allow removal of the unit and manual inspection of the storm water system.

2.3 The Dandy Curb Sack® unit shall utilize an orange monofilament fabric that is manufactured in the U.S.A with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 x 300
Grab Tensile Elongation	ASTM D 4632	%	40 x 25
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5
Permeability	ASTM 4491	cm/sec	0.25

Water Flow Rate	ASTM 4491	gal/min/ft ²	250
Ultraviolet Resistance	ASTM D 4355	%	70
Color			Orange ¹

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 **Installation:**

3.1 Remove the grate from the catch basin.

3.2 *For Oil and Sediment Model; to install or replace absorbent, place absorbent pillow in unit, on the bottom (below-grade side) of the unit.*

3.3 Stand the grate on end. Move the top lifting straps out of the way and place the grate into the Dandy Curb Sack® unit so that the grate is below the top straps and above the lower straps. The grate should be cradled between the upper and lower straps.

3.4 Holding the lifting devices, insert the grate into the inlet, then lower back edge with cylindrical tube into place, being careful that the grate remains in place and being careful not to damage the Dandy Curb Sack® unit. The cylindrical tube should partially block the curb hood opening when installed properly.

4.0 **Maintenance:**

4.1 Remove all accumulated sediment and debris from vicinity of unit after each storm event.

4.2 After each storm event and at regular intervals, look into the Dandy Curb Sack® unit. If the unit is more than 1/3 full of accumulated sediment, the unit must be emptied.

4.3 To empty the unit, using the lifting straps lift the unit out of the inlet and remove the grate. Transport the unit to an appropriate location for removal of the contents. Holding the dumping straps on the outside at the bottom of the unit, turn the unit upside down, emptying the contents. Reinstall unit as above.

4.4 *For Oil and Sediment Model; remove and replace absorbent when near saturation.*

4.5 Dispose of unit and/or absorbent in accord with applicable Federal, state and local environmental laws and regulations.

5.0 **Method of Measurement:**

5.1 The quantity to be paid is for the actual number of Dandy Curb Sack® inlet protection units installed

6.0 Basis of payment:

6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the Dandy Curb Sack® inlet protection units.


6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Curb Sack®	EA	Inlet Protection Unit (# _____ Inlet)

Dandy Pop



> **DANDY POP™** <

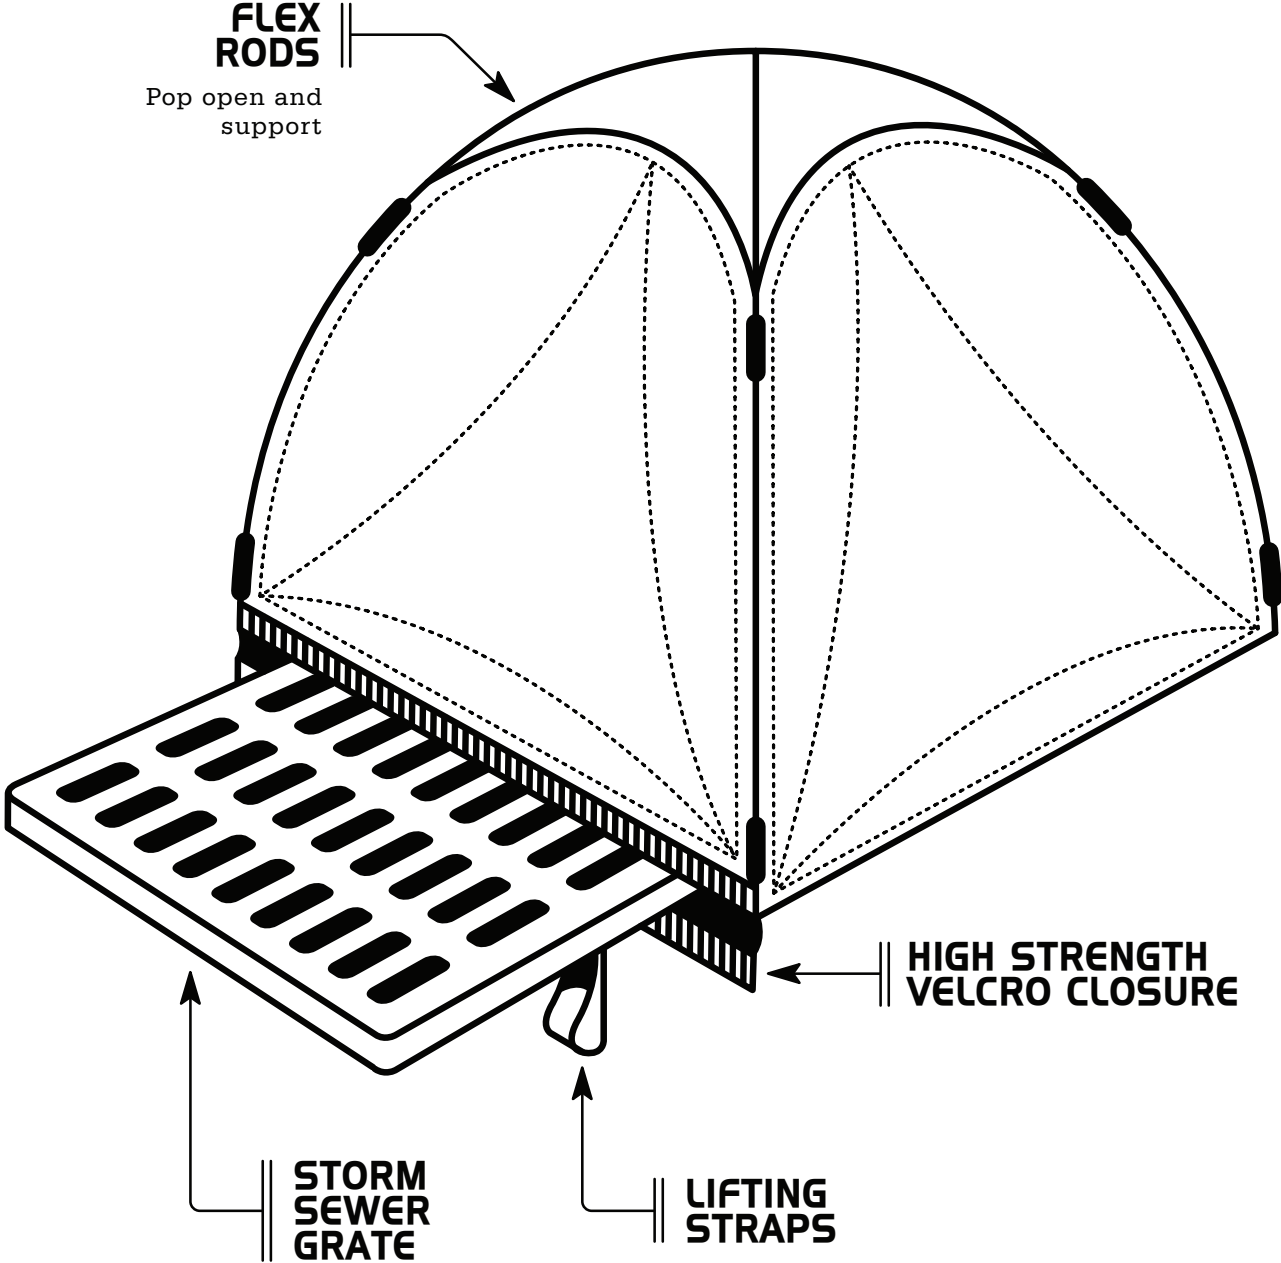

**FLEX
RODS**

Pop open and
support

**STORM
SEWER
GRATE**

**LIFTING
STRAPS**

**HIGH STRENGTH
VELCRO CLOSURE**

DANDY POP® (POP-UP DANDY BAG®) INLET PROTECTION SYSTEM GUIDE SPECIFICATION

PRODUCT: DANDY POP®

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Pop® inlet protection system. The purpose is to keep silt, sediment and construction debris out of the storm water system.

2.0 Material:

2.1 The Dandy Pop® inlet protection unit shall be a **sewn in the U.S.A.** geotextile fabric dome unit with a fully-covered support frame. The unit shall enclose the grate.

2.2 The Dandy Pop® shall unfold for installation to a height of approximately 24” (twenty-four inches).

2.3 The Dandy Pop® shall have lifting devises sewn to the bottom of the unit to assist in installation and to allow manual inspection of the storm water system.

2.4 The Dandy Pop® shall utilize an orange monofilament fabric that is manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 x300
Grab Tensile Elongation	ASTM D 4632	%	40 x 25
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5
Permeability	ASTM 4491	cm/sec	0.25
Water Flow Rate	ASTM 4491	gal/min/ft ²	250

Ultraviolet Resistance	ASTM D 4355	%	70
Color			Orange ¹

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 Installation:

- 3.1 Pop open the Dandy Pop[®] near the inlet.
- 3.2 Stand the grate on end and slide the Dandy Pop[®] over the grate.
- 3.3 For oil and sediment model; to install or replace absorbent, place absorbent pillow in pouch, on the bottom (below-grade side) of the unit. As desired, or required, attach absorbent pillow to provided tether loop.
- 3.4 Turn the grate 180° on end (turn twice) so that the opening is facing up.
- 3.5 Pull up slack and seal velcro[®] to enclose the grate.
- 3.6 Lay the grate flat, and holding the lifting devices, insert the grate into the inlet making sure that the grate seats completely in the frame.

4.0 Maintenance:

- 4.1 The contractor shall remove all accumulated sediment and debris from panels and surface and vicinity of unit after each rain event or as directed by engineer/inspector. Dispose of unit no longer in use at an appropriate recycling or solid waste facility.
- 4.2 *For oil and sediment model; remove and replace absorbent when near saturation.*

5.0 Method of Measurement:

- 5.1 The quantity to be paid is for the actual number of Dandy Pop[®] inlet protection units installed

6.0 Basis of payment:


- 6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the Dandy Pop[®] inlet protection units.
- 6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Pop [®]	EA	Inlet Protection Units (# _____ INLET)

Dandy Sack



DANDY SACK™

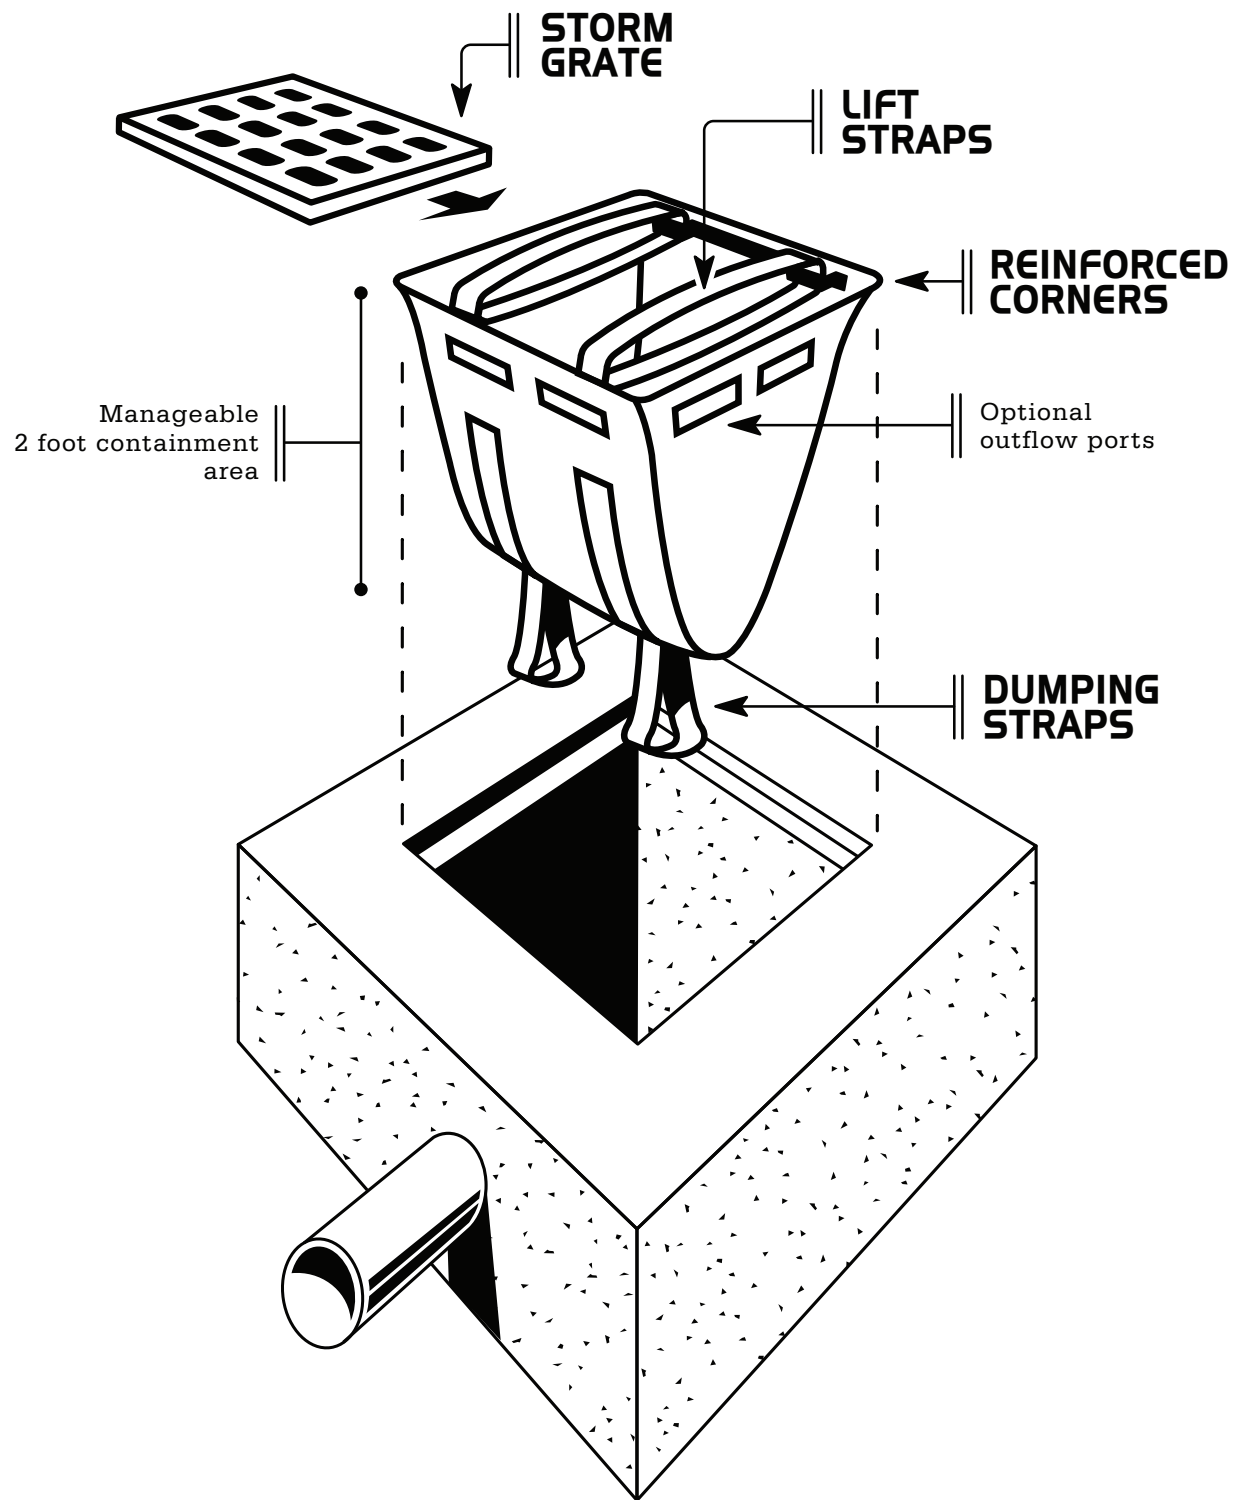

DANDY SACK®

INLET PROTECTION SYSTEM GUIDE SPECIFICATION

PRODUCT:

DANDY SACK®

MANUFACTURER:

Dandy Products Inc.
P.O. Box 1980
Westerville, Ohio 43086
Phone: 800-591-2284
Fax: 740-881-2791
E mail dlc@dandyproducts.com
Web www.dandyproducts.com

1.0 Description:

1.1 Work covered under this item consists of installing a Dandy Sack® inlet protection system. The purpose is to keep silt, sediment and construction debris out of the storm water system.

2.0 Material:

2.1 The Dandy Sack® inlet protection unit shall be a **sewn in the U.S.A.** geotextile fabric unit.

2.2 The Dandy Sack® shall have lifting straps to allow removal of the unit and manual inspection of the storm water system.

2.3 The Dandy Sack® unit shall utilize an orange monofilament fabric that is manufactured in the U.S.A. with the following characteristics:

PROPERTY	TEST METHOD	UNITS	TEST RESULTS
Grab Tensile Strength	ASTM D 4632	lbs	450 x 300
Grab Tensile Elongation	ASTM D 4632	%	40 x 25
Puncture Strength	ASTM D 4833	lbs	130
Mullen Burst Strength	ASTM D 3786	psi	600
Trapezoid Tear Strength	ASTM D 4533	lbs	165 x 150
% Open Area (POA)	COE - 22125-86	%	28
Apparent Opening Size	ASTM D 4751	US Std Sieve	30
Permittivity	ASTM D 4491	sec ¹	3.5
Permeability	ASTM 4491	cm/sec	0.25
Water Flow Rate	ASTM 4491	gal/min/ft ²	250
Ultraviolet Resistance	ASTM D 4355	%	70
Color			Orange ¹

¹The color orange is a trademark of Dandy Products, Inc.

The property values listed above are effective October 2010 and are subject to change without notice.

3.0 Installation:

3.1 Remove the grate from the catch basin.

3.2 *For Oil and Sediment Model; to install or replace absorbent, place absorbent pillow in unit, on the bottom (below-grade side) of the unit.*

3.3 Stand the grate on end. Move the top lifting straps out of the way and place the grate into the Dandy Sack® unit so that the grate is below the top straps and above the lower straps. The grate should be cradled between the upper and lower straps.

3.4 Holding the lifting devices, insert the grate into the inlet, being careful that the grate remains in place and being careful not to damage the Dandy Sack® unit.

4.0 Maintenance:

4.1 Remove all accumulated sediment and debris from vicinity of unit after each storm event.

4.2 After each storm event and at regular intervals, look into the Dandy Sack® unit. If the unit is more than 1/3 full of accumulated sediment, the unit must be emptied.

4.3 To empty the unit, using the lifting straps lift the unit out of the inlet and remove the grate. Transport the unit to an appropriate location for removal of the contents. Holding the dumping straps on the outside at the bottom of the unit, turn the unit upside down, emptying the contents. Reinstall unit as above.

4.4 *For Oil and Sediment Model; remove and replace absorbent when near saturation.*

4.5 Dispose of unit and/or absorbent in accord with applicable Federal, state and local environmental laws and regulations.

5.0 Method of Measurement:

5.1 The quantity to be paid is for the actual number of Dandy Sack® inlet protection units installed

6.0 Basis of Payment:

6.1 The unit price shall include labor, equipment, and materials necessary to complete the work and maintain the Dandy Sack® inlet protection units.

6.2 Payment for the completed work will be made at the contract prices for:

<u>ITEM</u>	<u>UNIT</u>	<u>DESCRIPTION</u>
Dandy Sack®	EA	Inlet Protection



Rapid Flow Curb Inlet Protection
with Polystyrene Aggregate

Product Specifications For Polystyrene Aggregate

Manufacturer for: Rapid Flow

Product Item Number: AG21

Product Description: Polystyrene Drainage Aggregate, Recycled

Physical Properties:

Color: Varying Light Colors including, but not limited to gray, beige, pink, and green.

Cell Structure: Fine to Medium

Density of Finished Product: .40 to .65 pounds per cubic foot.

Shape: Cubical in form, with annotated protuberances for increased surface area and increased flow characteristics. See Picture below.

Standards Testing:

ASTM C127-88
Law Engineering,
Proj. No. 50161-8-2142-01-831.

ASTM D2221-84
Gh Packaging & Product Testing and
Consulting
Project No. J#08189C4

ASTM C29-91a
ASTM C127-88


Void Space: 50.0 %

Bulk Dry Specific Gravity: .025

Flow Rate:
3.53 GPM PS Bead
2.61 GPM Gravel

Permanent Set

Load	Deformation (inches)
2psi	.0365
3psi	.542
4psi	.948
5psi	1.051

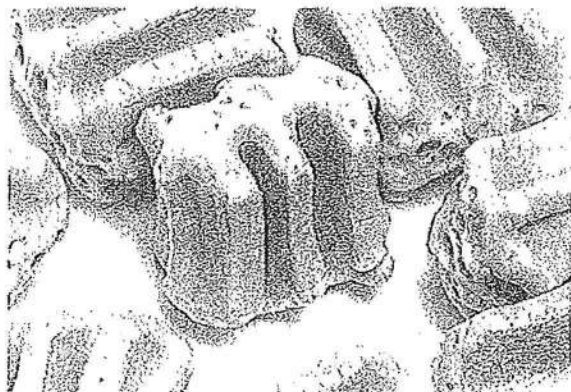


Polystyrene Drainage Beads Figure 1.

RAPID-FLOW DRAIN FILTER

(N.T.S.)

U.S. Patent No. 7,300,574

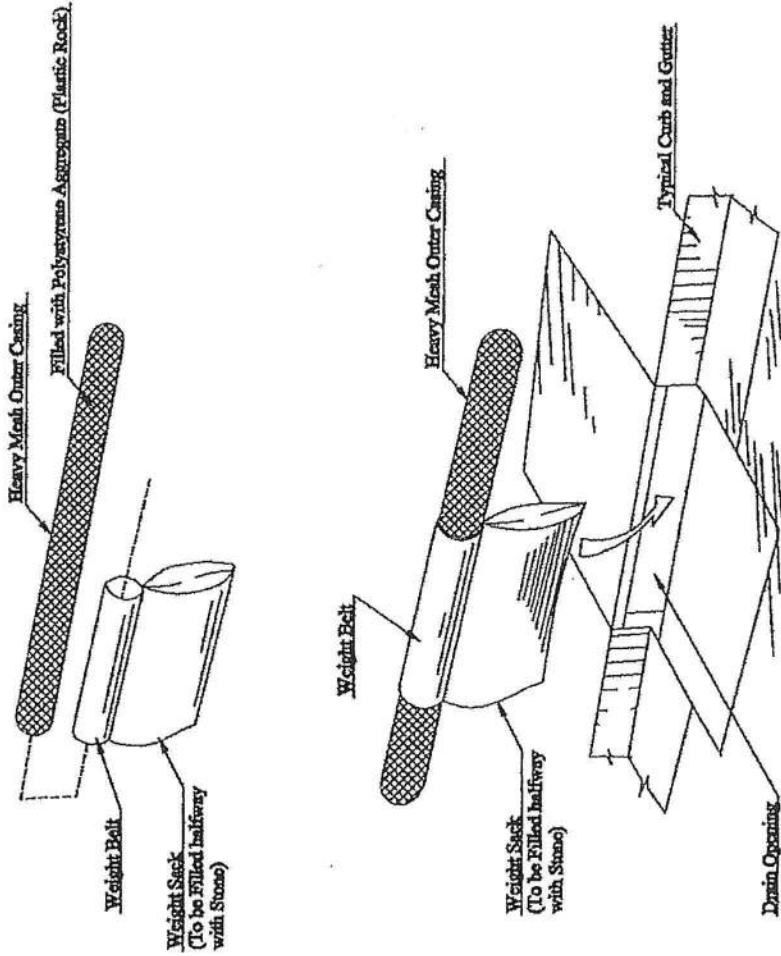

Installation Instructions

1. Fill provided weight belt with half bag of stone.
2. Place filled weight belt across over the Rapid Flow Bag, spacing them according to size of drain.
3. Place Rapid Flow Bag with weight belt in front of drain opening, allowing the weight belt to drop into the back of the drain opening.
4. Adjust Rapid Flow Bag so that the weight belt is evenly spaced, and there are at least 6" of Rapid Flow Bag beyond the drain opening on each side.
5. If you are in a low-flow area, make sure to add an Over Flow Filter in the middle of the Rapid Flow Bag.
6. After stone event, simply remove the Rapid Flow Bag, remove sufficient mesh belt up around the outside of the drain, then use the Rapid Flow Bag and repeat.

Maintenance Instructions

1. After a major stone event, remove mesh belt or debris build-up from over the Rapid Flow Bag and surrounding area.
2. Periodically, or after a major stone event, remove Rapid Flow Drain Filter from drain and hose-off with water to remove sufficient maintenance from joints to prevent back into drain through the Rapid Flow Bag.

EROSION CONTROL PRODUCTS, INC.

4001 Van Dyke Ct.
 Monroe, NC 28110
 Contact: Matt Hallett (National Sales Manager)
 Phone: 704-821-3042
 Fax: 704-821-5239
 Email: erosion-control@products.biz

Limited Warranty
 Erosion Control Products, Inc. warrants that the Rapid Flow Drain Filter will perform as described in the product literature for a period of 12 months from the date of purchase. This warranty is void if the product is used in an application not intended by the manufacturer.

Bio-soil Mixture (BSM-1)

Rockydale Quarries Bioretention Soil Mix Submittal of November 5, 2010


Analysis performed by A&L Eastern Laboratories, Inc.; Date of Report – November 4, 2010

Report of three soil samples submitted for two Virginia Tech Projects: ICTAS II and Materials Management.

Of the three samples, BIOMIX 2 most closely adheres to BMP Clearinghouse Guidelines. DCR has approved BIOMIX 2 for use at the above named projects.

SUMMARY OF BIOMIX 2:

Parameter	Required (units) [BMP Clearinghouse]	Actual (Soil Mixture)	% Different	Notes/Comments
Sand	85% - 88%	88.4%	0.4% Over	Silica Sand
Soil Fines	8% - 12%	11.6% (Silt=5.6%; Clay=6.0%)	Within Range	Sandy Loam Texture
Mix Organic Matter	3% - 5%	2.7%	0.3% below	
P-Index	Recommended Range 10 - 30 (7-23 ppm)	30 ppm	7 ppm over	
Cation exchange capacity (CEC)	>10 preferred	11.7 (meq/100g)	> 10 as preferred	
Topsoil Clay Content	NA	NA	NA	
Topsoil pH	NA	Entire Mix pH = 7.9	NA	Entire Mix
Topsoil Organic Content	NA	NA	NA	



ROCKYDALE QUARRIES CORPORATION

P.O. BOX 8425 • ROANOKE, VIRGINIA 24014-0425 • TELEPHONE (540) 774-1696 • FAX (540) 774-9114

November 5, 2010

Mr. Shane Hubbard

Hubbard Excavating & Hauling

2805 Blacksburg Road

Troutville, VA 24175

Re: Bioretention Soil for the Virginia Tech Materials Management Facility

Dear Shane,

Please review the soil chemical and soil texture analyses that have been submitted to you. A & L Eastern Laboratories have tested our sand and compost blends to find the correct ratio that will meet the VA DCR Stormwater Design Specification # 9. Please note that the sample Bio-Mix # 3 is the correct blend needed to meet the Virginia BMP Clearinghouse Standard.

Rockydale will blend in our bioretention soil, quartz silica concrete sand that is certified to be ASTM C-33 specification. This sand is shipped from the B. V. Hedrick Gravel and Sand Company in Lilesville, NC.

Rockydale will blend leaf compost into our bioretention soil. Rockydale has been composting leaves since August, 2003, with the approval of the Virginia Department of Environmental Quality. Rockydale is certifying that we will blend the sand and leaf compost to the ratios as required in the "VA Stormwater Management Handbook, Option B." This design specification # 9 is an acceptable BMP Clearinghouse Standard.

If you are in need of any additional information, please contact me.

Sincerely,

John Basham

Sales Manager



A&L Eastern Laboratories, Inc.

7821 Whitepine Road Richmond, Virginia 23237 (804) 743-9401 Fax (804) 271-8446

www.aalstarn.com

Client:
ROCKYDALE QUARRIES CORP
POB 8425
ROANOKE VA 24014-0425

Grower:
BIOMIX 1,2,3

Farm:

TEXTURE ANALYSIS

Report No : 10-307-0625
Cust No : 71708
Date Printed : 11/05/2010
Page : 1 of 1
Submitted By : JOHN BASHAM
Date Received : 11/03/2010

<u>Lab No</u>	<u>Field ID</u>	<u>Sample Identification</u>	<u>Percent Sand</u>	<u>Percent Silt</u>	<u>Percent Clay</u>	<u>Textural Classification</u>
15706		1 BIOMIX	86.4	5.6	8.0	Loamy Sand
15707		2 BIOMIX	88.4	5.6	6.0	Loamy Sand
15708		3 BIOMIX	88.4	5.6	6.0	Loamy Sand

Report Number: 10-307-0625
 Account Number: 71708



www.aalabstem.com

Send To: ROCKYDALE QUARRIES CORP
 POB 8425
 ROANOKE VA 24014-0425

Grower: BIOMIX 1,2,3

Submitted By: JOHN BASHAM
 Farm ID:

A&L Eastern Laboratories, Inc.
 7621 Whiteline Road Richmond, Virginia 23237 (804) 743-9401 Fax: (804) 771-6448

SOIL ANALYSIS REPORT

Analytical Method(s):
 Mehlich 3

Date Of Report: 11/05/2010

Date Of Analysis: 11/04/2010

Sample ID Field ID	Lab Number	Organic Matter		Phosphorus		Potassium		Magnesium		Calcium		Sodium		pH	Buffer Index	Acidity meq/100g	C.E.C
		%	Rate lbs/A	Method 3 ppm	Reserve ppm	K ppm	Rate	Mg ppm	Rate	Ca ppm	Rate	Na ppm	Rate				
1 BIOMIX	15706	2.6	M 91	21	L	72	L	261	H	1051	M			7.6		0.0	7.6
2 BIOMIX	15707	2.7	M 87	30	L	112	M	407	H	1613	M			7.9		0.0	11.7
3 BIOMIX	5708	4.4	M 117	39	M	163	H	494	H	2001	M			7.7		0.0	14.5

Sample ID Field ID	Percent Base Saturation						Nitrate NO ₃ ppm	Sulfur S ppm	Zinc Zn ppm	Manganese Mn ppm	Iron Fe ppm	Copper Cu ppm	Boron B ppm	Soil Salts meq/cm	Chloride Cl ppm	Ammonium ppm
	K %	Mg %	Ca %	Na %	H %	NO ₃ ppm										
1 BIOMIX	2.4	28.6	69.1		0.0									0.14	VL	
2 BIOMIX	2.5	29.0	68.9		0.0									0.14	VL	
3 BIOMIX	2.9	28.4	69.0		0.0									0.34	VL	

Values on this report represent the plant available nutrients in the soil. Rating after each value: VL (Very Low), L (Low), M (Medium), H (High), VH (Very High). ENR - Estimated Nitrogen Release. C.E.C. - Cation Exchange Capacity.

Explanation of symbols: % (percent), ppm (parts per million), lbs/A (pounds per acre), meq/cm (milliequivalents per centimeter), meq/100g (milliequivalent per 100 grams). Conversions: ppm x 2 = lbs/A, Soluble Salts meq/cm x 640 = ppm.

This report applies to sample(s) tested. Samples are reserved a maximum of thirty days after testing.

Analyses prepared by: A&L Eastern Laboratories, Inc.

by:

Paucic McGroary

VIRGINIA DCR STORMWATER
DESIGN SPECIFICATION No. 9(Portions of
SPEC. No. 9)**BIORETENTION**VERSION 1.8
April 13, 2010**SECTION 1: DESCRIPTION**

Individual bioretention areas can serve highly impervious drainage areas less than two (2) acres in size. Surface runoff is directed into a shallow landscaped depression that incorporates many of the pollutant removal mechanisms that operate in forested ecosystems. The primary component of a bioretention practice is the filter bed, which has a mixture of sand, soil, and organic material as the filtering media with a surface mulch layer. During storms, runoff temporarily ponds 6 to 12 inches above the mulch layer and then rapidly filters through the bed. Normally, the filtered runoff is collected in an underdrain and returned to the storm drain system. The underdrain consists of a perforated pipe in a gravel layer installed along the bottom of the filter bed. A bioretention facility with an underdrain system is commonly referred to as a *Bioretention Filter*.

Bioretention can also be designed to infiltrate runoff into native soils. This can be done at sites with permeable soils, a low groundwater table, and a low risk of groundwater contamination. This design features the use of a "partial exfiltration" system that promotes greater groundwater recharge. Underdrains are only installed beneath a portion of the filter bed, above a stone "sump" layer, or eliminated altogether, thereby increasing stormwater infiltration. A bioretention facility without an underdrain system, or with a storage sump in the bottom is commonly referred to as a *Bioretention Basin*.

Small-scale or Micro-Bioretention used on an individual residential lot is commonly referred to as a *Rain Garden*.

Maximum Ponding Depth = 6 inches	
Filter Media Depth minimum = 18 inches; Recommended maximum = 36 inches	Filter Media Depth minimum = 24 inches; Recommended maximum = 36 inches
Media: mixed on-site or supplied by vendor	Media: supplied by vendor
All Designs: Media mix tested for an acceptable phosphorus index (P-Index) of between 10 and 30, OR Between 7 and 21 mg/kg of P in the soil media	
Sub-soil testing: not needed if an underdrain is used; Min infiltration rate > 1 inch/hour in order to remove the underdrain requirement.	Sub-soil testing: one per practice; Min infiltration rate > 1/2 inch/hour; Min infiltration rate > 1 inch/hour in order to remove the underdrain requirement.
Underdrain: corrugated HDPE or equivalent.	Underdrain: corrugated HDPE or equivalent, with a minimum 6-inch stone sump below the invert; OR none, if soil infiltration requirements are met
Clean-outs: not needed	
Inflow: sheetflow or roof leader	
Pretreatment: external (leaf screens, grass filter strip, energy dissipater, etc.).	Pretreatment: external <i>plus</i> a grass filter strip
Vegetation: turf, herbaceous, or shrubs (min = 1 out of those 3 choices).	Vegetation: turf, herbaceous, shrubs, or trees (min = 2 out of those 4 choices).
Building setbacks: 10 feet down-gradient; 25 feet up-gradient	
<p>¹ Consult Appendix 9-A for design criteria for Urban_Bioretention Practices.</p> <p>² Micro-Bioretention (Rain Gardens) can be located at individual downspout locations to treat up to 1,000 sq. ft. of impervious cover (100% IC); the surface area is sized as 5% of the roof area (Level 1) or 6% of the roof area (Level 2), with the remaining Level 1 and Level 2 design criteria as provided in Table 9.2. If the Rain Garden is located so as to capture multiple rooftops, driveways, and adjacent pervious areas, the sizing rules within Table 9.2 should apply.</p>	



Table 9.3. Bioretention Filter and Basin Design Criteria

Level 1 Design (RR 40 TP: 25)	Level 2 Design (RR: 80 TP: 50)
Sizing (Section 6.1):	Sizing (Section 6.1):
Surface Area (sq. ft.) = $(T_v - \text{the volume reduced by an upstream BMP}) / \text{Storage Depth}^1$	Surface Area (sq. ft.) = $[(1.25)(T_v) - \text{the volume reduced by an upstream BMP}] / \text{Storage Depth}^1$
Recommended maximum contributing drainage area = 2.5 acres	
Maximum Ponding Depth = 6 to 12 inches ²	Maximum Ponding Depth = 6 to 12 inches ²
Filter Media Depth minimum = 24 inches; recommended maximum = 6 feet	Filter Media Depth minimum = 36 inches; recommended maximum = 6 feet
Media & Surface Cover (Section 6.6) = supplied by vendor; tested for acceptable phosphorus index (P-Index) of between 10 and 30, OR Between 7 and 21 mg/kg of P in the soil media	
Sub-soil Testing (Section 6.2): not needed if an underdrain used; Min infiltration rate > 1/2 inch/hour in order to remove the underdrain requirement.	Sub-soil Testing (Section 6.2): one per 1,000 sq. ft. of filter surface; Min infiltration rate > 1/2 inch/hour in order to remove the underdrain requirement.
Underdrain (Section 6.7) = Schedule 40 PVC with clean-outs	Underdrain & Underground Storage Layer (Section 6.7) = Schedule 40 PVC with clean outs, and a minimum 12-inch stone sump below the invert; OR , none, if soil infiltration requirements are met (Section 6.2)
Inflow: sheetflow, curb cuts, trench drains, concentrated flow, or the equivalent	
Geometry (Section 6.3): Length of shortest flow path/Overall length = 0.3; OR , other design methods used to prevent short-circuiting; a one-cell design (not including the pre-treatment cell).	Geometry (Section 6.3): Length of shortest flow path/Overall length = 0.8; OR , other design methods used to prevent short-circuiting; a two-cell design (not including the pretreatment cell).

Pre-treatment (Section 6.4): a pretreatment cell, grass filter strip, gravel diaphragm, gravel flow spreader, or another approved (manufactured) pre-treatment structure.	Pre-treatment (Section 6.4): a pretreatment cell <i>plus</i> one of the following: a grass filter strip, gravel diaphragm, gravel flow spreader, or another approved (manufactured) pre-treatment structure.
Conveyance & Overflow (Section 6.5)	Conveyance & Overflow (Section 6.5)
Planting Plan (Section 6.8): a planting template to include turf, herbaceous vegetation, shrubs, and/or trees to achieve surface area coverage of at least 75% within 2 years.	Planting Plan (Section 6.8): a planting template to include turf, herbaceous vegetation, shrubs, and/or trees to achieve surface area coverage of at least 90% within 2 years. If using turf, must combine with other types of vegetation ¹ .
Building Setbacks ³ (Section 5): 0 to 0.5 acre CDA = 10 feet if down-gradient from building or level (coastal plain); 50 feet if up-gradient. 0.5 to 2.5 acre CDA = 25 feet if down-gradient from building or level (coastal plain); 100 feet if up-gradient. (Refer to additional setback criteria in Section 5)	
Deeded Maintenance O&M Plan (Section 8)	
<p>¹ Storage depth is the sum of the Void Ratio (V_r) of the soil media and gravel layers multiplied by their respective depths, plus the surface ponding depth. Refer to Section 6.1.</p> <p>² A ponding depth of 6 inches is preferred. Ponding depths greater than 6 inches will require a specific planting plan to ensure appropriate plant selection (Section 6.8).</p> <p>³ These are recommendations for simple building foundations. If an in-ground basement or other special conditions exist, the design should be reviewed by a licensed engineer. Also, a special footing or drainage design may be used to justify a reduction of the setbacks noted above.</p>	

SECTION 3: TYPICAL DETAILS

Figures 9.2 through 9.5 provide some typical details for several bioretention configurations. Also see additional details in Appendix 9-B of this design specification.

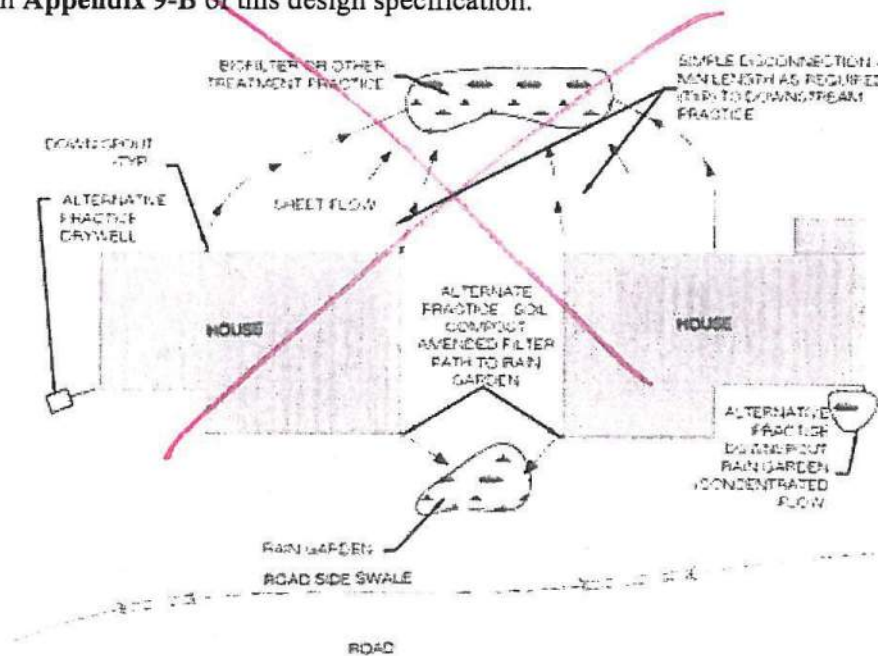


Figure 9.2. Residential Rooftop Treatment - Plan View:
 (a) Simple Disconnection to downstream Raingarden;
 (b) Disconnection - Alternative Practice: Raingarden;
 (c) Disconnection - Alternative Practice: Compost

✓ 6.6. Filter Media and Surface Cover

The filter media and surface cover are the two most important elements of a bioretention facility in terms of long-term performance. The following are key factors to consider in determining an acceptable soil media mixture.

- **General Filter Media Composition.** The recommended bioretention soil mixture is generally classified as a loamy sand on the USDA Texture Triangle, with the following composition:
 - 85% to 88% sand;
 - 8% to 12% soil fines; and
 - 3% to 5% organic matter.

It may be advisable to start with an open-graded coarse sand material and proportionately mix in topsoil that will likely contain anywhere from 30% to 50% soil fines (sandy loam, loamy sand) to achieve the desired ratio of sand and fines. An additional 3% to 5% organic matter can then be added. (The exact composition of organic matter and topsoil material will vary, making particle size distribution and recipe for the total soil media mixture difficult to define in advance of evaluating the available material.)

- **P-Index.** The P-Index provides a measure of soil phosphorus content and the risk of that phosphorus moving through the soil media. The risk of phosphorus movement through a soil is influenced by several soil physical properties: texture, structure, total pore space, pore-size, pore distribution, and organic matter. A soil with a lot of fines will hold phosphorus while also limiting the movement of water. A soil that is sandy will have a high permeability, and will therefore be less likely to hold phosphorus within the soil matrix.

A primary factor in interpreting the desired P-Index of a soil is the bulk density. Saxton et. al. (1986) estimated generalized bulk densities and soil-water characteristics from soil texture. The expected bulk density of the loamy sand soil composition described above should be in the range of 1.6 to 1.7 g/cu. cm. Therefore, *the recommended range for bioretention soil P-index of between 10 and 30 corresponds to a phosphorus content range (mg of P to kg of soil) within the soil media of 7 mg/kg to 23 mg/kg.*

- **Cation Exchange Capacity (CEC).** The CEC of a soil refers to the total amount of positively charged elements that a soil can hold; it is expressed in milliequivalents per 100 grams (meq/100g) of soil. For agricultural purposes, these elements are the basic cations of calcium (Ca^{+2}), magnesium (Mg^{+2}), potassium (K^{+1}) and sodium (Na^{+1}) and the acidic cations of hydrogen (H^{+1}) and aluminum (Al^{+3}). The CEC of the soil is determined in part by the amount of clay and/or humus or organic matter present. *Soils with CECs exceeding 10 are preferred for pollutant removal.* Increasing the organic matter content of any soil will help to increase the CEC, since it also holds cations like the clays.

- ***Infiltration Rate.*** The bioretention soil media should have a minimum infiltration rate of 1 to 2 inches per hour (a proper soil mix will have an initial infiltration rate that is significantly higher).
- ***Depth.*** The standard minimum filter bed depth ranges from 24 and 36 inches for Level 1 and Level 2 designs, respectively, (18 to 24 inches for rain gardens or micro-bioretention). If trees are included in the bioretention planting plan, tree planting holes in the filter bed must be at least 4 feet deep to provide enough soil volume for the root structure of mature trees. Use turf, perennials or shrubs instead of trees to landscape shallower filter beds.
- ***Filter Media for Tree Planting Areas.*** A more organic filter media is recommended within the planting holes for trees, with a ratio of 50% sand, 30% topsoil and 20% acceptable leaf compost.
- ***Mulch.*** A 2 to 3 inch layer of mulch on the surface of the filter bed enhances plant survival, suppresses weed growth, and pre-treats runoff before it reaches the filter media. Shredded, aged hardwood bark mulch makes a very good surface cover, as it retains a significant amount of nitrogen and typically will not float away.
- ***Alternative to Mulch Cover.*** In some situations, designers may consider alternative surface covers such as turf, native groundcover, erosion control matting (coir or jute matting), river stone, or pea gravel. The decision regarding the type of surface cover to use should be based on function, cost and maintenance. Stone or gravel are not recommended in parking lot applications, since they increase soil temperature and have low water holding capacity.
- ***Media for Turf Cover.*** One adaptation is to design the filter media primarily as a sand filter with organic content only at the top. Leaf compost tilled into the top layers will provide organic content for the vegetative cover. If grass is the only vegetation, the ratio of compost may be reduced.

- Designers should also remember that planting holes for trees need must be at least 4 feet deep to provide enough soil volume for the root structure of mature trees. This applies even if the remaining soil media layer is shallower than 4 feet.
- If trees are used, plant shade-tolerant ground covers within the drip line.
- Maintenance is an important consideration in selecting plant species. Plant selection differs if the area will be frequently mowed, pruned, and weeded, in contrast to a site which will receive minimum annual maintenance.
- If the bioretention area is to be used for snow storage or is to accept snowmelt runoff, it should be planted with salt-tolerant, herbaceous perennials.

6.9. Bioretention Material Specifications

Table 9.6 outlines the standard material specifications used to construct bioretention areas.

Table 9.6. Bioretention Material Specifications

Material	Specification	Notes
Filter Media Composition	Filter Media to contain: <ul style="list-style-type: none"> • 85%-88% sand • 8%-12% soil fines • 3%-5% organic matter in the form of leaf compost 	The volume of filter media based on 110% of the plan volume, to account for settling or compaction.
Filter Media Testing	P-Index range = 10-30, <i>OR</i> Between 7 and 21 mg/kg of P in the soil media. CECs greater than 10	The media must be procured from approved filter media vendors.
Mulch Layer	Use aged, shredded hardwood bark mulch	Lay a 2 to 3 inch layer on the surface of the filter bed.
Alternative Surface Cover	Use river stone or pea gravel, coir and jute matting, or turf cover.	Lay a 2 to 3 inch layer of to suppress weed growth.
Top Soil For Turf Cover	Loamy sand or sandy loam texture, with less than 5% clay content, pH corrected to between 6 and 7, and an organic matter content of at least 2%.	3 inch surface depth. <i>ADJACENT TO Biofilter (TURF NOT IN CELL)</i>
Geotextile/Liner	Use a non-woven geotextile fabric with a flow rate of > 110 gal./min./sq. ft. (e.g., Geotex 351 or equivalent)	Apply only to the sides and above the underdrain. For hotspots and certain karst sites only, use an appropriate liner on bottom.
Choking Layer	Lay a 2 to 4 inch layer of sand over a 2 inch layer of choker stone (typically #8 or #89 washed gravel), which is laid over the underdrain stone.	
Stone Jacket for Underdrain and/or Storage Layer	1 inch stone should be double-washed and clean and free of all fines (e.g., VDOT #57 stone).	12 inches for the underdrain; 12 to 18 inches for the stone storage layer, if needed
Underdrains, Cleanouts, and Observation Wells	Use 6 inch rigid schedule 40 PVC pipe (or equivalent corrugated HDPE for micro-bioretention), with 3/8-inch perforations at 6 inches on center; position each underdrain on a 1% or 2% slope located no more than 20 feet from the next pipe.	Lay the perforated pipe under the length of the bioretention cell, and install non-perforated pipe as needed to connect with the storm drain system. Install T's and Y's as needed, depending on the underdrain configuration. Extend cleanout pipes to the surface with vented caps at the Ts and Ys.
Plant Materials	Plant one tree per 250 square feet (15 feet on-center, minimum 1 inch caliper).	Establish plant materials as specified in the landscaping plan and the recommended plant list.

	<p>Shrubs a minimum of 30 inches high planted a minimum of 10 feet on-center. Plant ground cover plugs at 12 to 18 inches on-center; Plant container-grown plants at 18 to 24 inches on-center, depending on the initial plant size and how large it will grow.</p>	<p>In general, plant spacing must be sufficient to ensure the plant material achieves 80% cover in the proposed planting areas within a 3-year period. If seed mixes are used, they should be from a qualified supplier, should be appropriate for stormwater basin applications, and should consist of native species (unless the seeding is to establish maintained turf).</p>
--	--	---

SECTION 7: REGIONAL & SPECIAL CASE DESIGN ADAPTATIONS

7.1 Karst Terrain

Karst regions are found in much of the Ridge and Valley province of Virginia, which complicates both land development and stormwater design. While bioretention areas produce less deep ponding than conventional stormwater practices (e.g., ponds and wetlands), Level 2 bioretention designs (i.e., infiltration) are not recommended in any area with a moderate or high risk of sinkhole formation (Hyland, 2005). On the other hand, Level 1 designs that meet separation distance requirements (3 feet) and possess an impermeable bottom liner and an underdrain should work well. In general, micro-bioretention and bioretention basins with contributing drainage areas not exceeding 20,000 square feet are preferred (compared to bioretention with larger drainage areas), in order to prevent possible sinkhole formation. However, it may be advisable to increase standard setbacks to buildings.

7.2 Coastal Plain

The flat terrain, low hydraulic head, and high water table of many coastal plain sites can constrain the application of deeper bioretention areas (particularly Level 2 designs). In such settings, the following design adaptations may be helpful:

- A linear approach to bioretention, using multiple cells leading to the ditch system, helps conserve hydraulic head.
- The minimum depth of the filter bed may be 18 to 24 inches. It is useful to limit surface ponding to 6 to 9 inches and avoid the need for additional depth by establishing a turf cover rather than using mulch. The shallower media depth and the turf cover generally comply with the Dry Swale specification, and therefore will be credited with a slightly lower pollutant removal (See Stormwater Design Specification No. 10: Dry Swales).
- The minimum depth to the seasonally high water table from the invert of the system can be 1 foot, as long as the bioretention area is equipped with a large-diameter underdrain (e.g., 6 inches) that is only partially efficient at dewatering the bed.
- It is important to maintain at least a 0.5% slope in the underdrain to ensure positive drainage.
- The underdrain should be tied into the ditch or conveyance system.
- The mix of plant species selected should reflect coastal plain plant communities and should be more wet-footed and salt-tolerant than those used in typical Piedmont applications.

While these design criteria permit bioretention to be used on a wider range of coastal plain sites, it is important not to avoid using bioretention on marginal sites. Other stormwater practices, such as wet swales, ditch wetland restoration, and smaller linear wetlands, are often preferred alternatives for coastal plain sites.

Appendix C – Illicit Discharge Annual Report Summary

Summary of Illicit Discharges 2017

Illicit Discharge Location	Date of Incident	Narrative
Hydraulic Line Leak – Barger Street	7/11/2016	On July 11, 2016, VT SID received a report of a hydraulic line leak from a piece of equipment located on Barger Street near the Virginia Tech Rescue Squad Building. The Environmental Health and Safety Office responded and assisted with the clean-up efforts. Closure Date: 7/11/2016
Water Main Break – Plantation Road (Central Branch)	7/27/2016	A water main break occurred on July 27, 2016 along Plantation Road on the Virginia Tech campus. Discharge from the water main break entered the Central Branch of Stroubles Creek. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 7/27/2016
Water Main Break – CMMID Facility (Central Branch)	8/24/2016	A water main break occurred on August 24, 2016 at the CMMID Facility located on Prices Fork Road. Discharge from the water main break entered the Central Branch of Stroubles Creek. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 8/24/2016
Water Main Break – Beamer Way/Southgate Drive (Vet Med Pond)	8/29/2016	A water main break occurred on August 29, 2016 along Beamer Way and Southgate Drive on the Virginia Tech campus. Discharge from the water main break entered Stroubles Creek via the Vet Med Retention Pond. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 8/29/2016
Water Main Break – Visitor’s Center (Central Branch)	9/15/2016	A water main break occurred on September 15, 2016 at the Virginia Tech Visitor’s Center on Prices Fork Road. Discharge from the water main break entered the Central Branch of Stroubles Creek. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 9/15/2016
Water Main Break – Parking Lot Below Sterrett Facilities Complex (Vet Med Pond)	9/26/2016	A water main break occurred on September 26, 2016 in a parking lot below the Sterrett Facilities Complex on the Virginia Tech campus. Discharge from the water main break entered Stroubles Creek via the Vet Med Retention Pond. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 9/26/2016
Water Main Break – Food Science Building (Vet Med Pond)	10/5/2016	A water main break occurred on October 5, 2016 at the Food Science Building on the Virginia Tech Campus. Discharge from the water main break entered Stroubles Creek via the Vet Med Retention Pond. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 10/5/2016
Day Tank Overflow – VT Central Steam Plant	10/27/2016	A white, milky substance was discovered in Stroubles Creek on October 31, 2016. The substance is thought to be from operator error that resulted in spilled chemicals from an overfilled day tank at the VT Central Steam Plant. The spilled chemicals entered floor drains which lead to the sanitary sewer system, although further investigation is needed. The VT Central Steam Plant has implemented several improvements to prevent this from occurring in the future. The VT EHS Department was made of aware of the incident and has reported it to the VA DEQ. Closure Date: on-going

Summary of Illicit Discharges 2017

<p>Water Main Break – Fleet Services Building (Vet Med Pond)</p>	<p>11/11/2016</p>	<p>A water main break occurred on November 11, 2016 at the Fleet Services Building on the Virginia Tech Campus. Discharge from the water main break entered Stroubles Creek via the Vet Med Retention Pond. VT personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 11/11/2016</p>
<p>Town of Blacksburg Water Main Break (Webb Branch)</p>	<p>12/21/2016</p>	<p>A water main break occurred in the Town of Blacksburg on December 21, 2016. The town immediately notified the Site & Infrastructure Development Office when the discharge entered Virginia Tech property. Town of Blacksburg crews responded to the discharge. Closure Date: 12/21/2016</p>
<p>Water Main Break – Visitor’s Center (Central Branch)</p>	<p>2/24/2017</p>	<p>A water main break occurred on February 24, 2017 at the Visitor’s Center on Virginia Tech Campus. Discharge from the water main break entered Stroubles Creek via the Central Branch. VT Personnel from Mechanical Utilities responded quickly and made necessary repairs. Closure Date: 2/24/2017</p>
<p>Fuel Spill – Virginia Tech Montgomery Executive Airport (VTMEA) (unnamed tributary to Slate Branch)</p>	<p>5/8/2017</p>	<p>A fuel spill was discovered at VTMEA on May 8, 2017. Fuel from the spill entered a nearby Extended Detention Basin and then an unnamed tributary of Slate Branch. VT EHS was notified as soon as the spill was discovered and a company was employed to investigate, mitigate, and clean up the spill. VT EHS reported the spill to the VA DEQ. All necessary fuel system repairs were completed on July 13, 2017. Closure Date: 7/13/2017</p>

Appendix D – Stormwater Management Facilities

BMP Number	BMP Name	BMP Status	BMP Type	BMP Location	Latitude	Longitude	Pervious Drainage Area (Acres)	Impervious Drainage Areas (Acres)	Total Acres	Date Added (MM/YYYY)	Sixth Order HUC	Impaired Water	Operator-owned or Privately-owned?	Maintenance Agreement (Y/N)	Date of Last Inspection
BMP_0001	Lane Stadium - Extended Detention Basin	Existing	Extended Detention	Virginia Tech Lane Stadium 285 Spring Road Blacksburg, VA 24061	37-13-8 N	80-25-1 W	1.06	0.05	1.11	06/2010	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0002	Chicken Hill Underground Detention Basin	Existing	Underground Stormwater Detention Facility	Corner of Southgate Road and Tech Center Drive (adjacent to Chicken Hill Parking Lot) Blacksburg, VA 24061	37-13-1.9 N	80-25-5.65 W	3.35	7.15	10.5	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0004	Vet Med - Retention Pond	Existing	Retention Pond	Virginia Tech Campus Corner of Duckpond Road and Southgate Drive Blacksburg, VA 24061	37-12-59 N	80-25-32 W	312.2	119.5	431.7	06/2005	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0005	Vet Med - Detention Pond	Existing	Detention Pond	Virginia Tech Campus Corner of Southgate Drive and Route 460 Blacksburg, VA 24061	37-12-57 N	80-25-50 W	457.5	148.3	605.8	06/2005	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0007	Smithfield Lot Bioretention Pretreatment	Existing	Bioretention Pretreatment	Virginia Tech Campus Smithfield Road (Smithfield Parking Lot) Blacksburg, VA 24061	37-13-22 N	80-25-46 W	0.36	1.03	1.39	06/2010	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0008	Smithfield Lot Bioretention	Existing	Bioretention	Virginia Tech Campus Smithfield Road (Smithfield Parking Lot) Blacksburg, VA 24061	37-13-22 N	80-25-46 W	0.49	1.04	1.53	07/2007	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0009	Smithfield Lot Extended Detention 1	Existing	Extended Detention	Virginia Tech Campus Smithfield Road (Smithfield Parking Lot) Blacksburg, VA 24061	37-13-24 N	80-25-46 W	0.09	0.16	0.25	07/2007	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0010	Smithfield Lot Extended Detention 2	Existing	Extended Detention	Virginia Tech Campus Smithfield Road (Smithfield Parking Lot) Blacksburg, VA 24061	37-13-25 N	80-25-45 W	0.22	0.27	0.49	07/2007	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0011	Duck Pond Overflow Lot - Extended Detention	Existing	Extended Detention	Virginia Tech Campus Oak Lane (adjacent to Duck Pond Overflow Lot) Blacksburg, VA 24061	37-13-22 N	80-25-50 W	0.43	1.83	2.26	06/2005	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0013	Oak Lane (SPH) - Extended Detention Basin	Existing	Extended Detention	Virginia Tech Campus Oak Lane (Center of Oak Lane Community) Blacksburg, VA 24061	37-13-29 N	80-26-17 W	6.89	4.31	11.2	06/2005	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0014	Alumni Pond	Existing	Enhanced Extended Detention	Virginia Tech Campus Corner of Duck Pond Drive and West Campus Drive Blacksburg, VA 24061	37-13-42 N	80-25-41 W	15.8	28.0	43.8	01/2012	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0015	Grove Lane Extended Detention	Existing	Extended Detention	Virginia Tech Campus Duck Pond Drive Blacksburg, VA 20461	37-13-22 N	80-25-39 W	33.5	28.2	61.7	06/2005	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0016	Life Sciences - Green Roof Extension 1	Existing	Green Roof	Virginia Tech Life Sciences I Facility 970 Washington Street SW Blacksburg, VA 24061	37-13-16 N	80-25-28 W	0.11	0.22	0.33	06/2010	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0017	Life Sciences - Green Roof Extension 2	Existing	Green Roof	Virginia Tech Life Sciences I Facility 970 Washington Street SW Blacksburg, VA 24061	37-13-14 N	80-25-28 W	0.06	0.19	0.25	06/2010	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0018	Payne (NR) - Underground Detention Basin	Existing	Underground Detention	Virginia Tech Campus Between Slusher Wing and Dietrick Dining Hall Blacksburg, VA 24062	37-13-31 N	80-25-16 W	3.16	2.13	5.29	06/2005	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0019	Henderson Hall Bioretention Filter	Existing	Bioretention Filter	Virginia Tech Henderson Hall 195 Alumni Mall Blacksburg, VA 24061	37-13-49 N	80-25-00 W	0.84	0.42	1.26	07/2011	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0020	New Hall West 1	Existing	Bioretention Filter	Virginia Tech Campus New Hall West 190 West Campus Drive Blacksburg, VA 24061	37-13-19.173 N	80-25-21.899 W	0.05	0.11	0.16	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0021	New Hall West 2	Existing	Bioretention Filter	Virginia Tech Campus New Hall West 190 West Campus Drive Blacksburg, VA 24061	37-13-20.632 N	80-25-19.96 W	0.1	0.16	0.26	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0022	Horse Exhibit - Livestock Arena	Existing	Extended Detention	Virginia Tech Campus Alphin Stuart Livestock Teaching Arena 500 Plantation Road Blacksburg, VA	37-13-13 N	80-26-26 W	4.93	0.87	5.8	06/2005	NE59	Stroubles Creek	Operator-owned	-	Oct-16
BMP_0023	VTES - Extended Detention	Existing	Extended Detention	Virginia Tech Montgomery Executive Airport 1601 Research Center Drive Blacksburg, Va 24060	37-12-40 N	80-24-46 W	28.32	8.58	36.9	06/2005	NE59	Stroubles Creek	Operator-owned	-	Dec-16
BMP_0024	Library Storage - Extended Detention	Existing	Extended Detention	University Storage Facility 600 Energy Drive Blacksburg, VA 24061	37-12-46 N	80-24-40 W	10.97	2.73	13.7	06/2005	NE59	Stroubles Creek	Operator-owned	-	Apr-17

BMP_0027	ICTAS II- Bioretention	Existing	Bioretention Filter	Virginia Tech Institute for Critical Technology and Applied Science (ICTAS II) 1075 Life Science Circle Blacksburg, VA 24061	37-13-20 N	80-25-32 W	0.05	0.28	0.33	07/2011	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0028	HABBI Bioretention	Proposed	Bioretention	Virginia Tech 1230 Washington St. SW Blacksburg, Va 24061	37.220153	-80.427429	0.7	0.69	1.39	7/8/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0029	SWCP	Existing	Extended Detention	Virginia Tech Campus Southwest Chiller Plant 2295 Smithfield Road Blacksburg, VA 24061	37-13-16 N	80-25-50 W	3.25	1.31	4.56	11/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0030	Vet Med - IDRF Retention Basin	Existing	Retention Basin	Virginia Tech Campus 295 Duck Pond Drive Blacksburg, VA 24061	37-13-1 N	80-25-46 W	6.61	8.17	14.78	05/2012	NE59	Stroubles Creek	Operator-owned	-	Oct-16
BMP_0034	Lower Chicken Hill WQU	Existing	Underground WQU	Corner of Southgate Road and Tech Center Drive (adjacent to Chicken Hill Parking Lot) Blacksburg, VA 24061	37-13-2 N	80-25-6 W	3.35	7.15	10.5	01/2012	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0035	New Hall West 3	Existing	Bioretention Filter	Virginia Tech Campus New Hall West 190 West Campus Drive Blacksburg, VA 24061	37-13-21 N	80-25-21 W	0.05	0.19	0.24	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0036	New Hall West 4	Existing	Bioretention Filter	Virginia Tech Campus New Hall West 190 West Campus Drive Blacksburg, VA 24061	37-13-20 N	80-25-22 W	0.02	0.12	0.14	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0037	McComas Filterra Unit	Existing	Filtterra Unit	Virginia Tech campus McComas Hall 895 Washington Street SW Blacksburg, VA 24061	37-13-11 N	80-25-23 W	0.26	0.4	0.66	07/2011	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0038	Football Locker Room WQU	Existing	Underground WQU	Virginia Tech Campus Merryman Athletic Facility 165 Spring Road Blacksburg, VA 24061	37-13-20 N	80-25-21 W	0.47	2.6	3.07	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0039	ICTAS II - Rain Garden	Existing	Bioretention Filter	Virginia Tech Institute for Critical Technology and Applied Science (ICTAS II) 1075 Life Science Circle Blacksburg, VA 24061	37-13-20 N	80-25-32 W	0	0.15	0.15	07/2011	NE59	Stroubles Creek	Operator-owned	-	Mar-17
BMP_0041	MMF Bioretention Filter	Existing	Bioretention Filter	Virginia Tech Health and Safety Building 675 Research Center Drive Blacksburg, VA 24061	37-12-52 N	80-25-28 W	0.53	0.87	1.4	09/2011	NE59	Stroubles Creek	Operator-Owned	-	Mar-17
BMP_0042	West End Bioretention Filter	Existing	Bioretention Filter	Virginia Tech West End Market at Cochrane Hall 770 Washington Street SW Blacksburg, VA 24061	37-13-19.945 N	80-25-22.73 W	0.34	0.19	0.53	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0043	West End Filterra	Existing	Filtterra Unit	Virginia Tech West End Market at Cochrane Hall 770 Washington Street SW Blacksburg, VA 24061	37-13-23.684 N	80-25-24.707 W	0.06	0.59	0.65	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0044	Roller Hockey Rink WQU	Existing	Stormceptor Underground WQU	Washington Street (southeast of Basketball Practice Facility) Blacksburg, VA 24061	37-19-1 N	79-58-27 W	3.22	4.2	7.42	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0045	Visitor's Center - Bioretention Filter 1	Existing	Bioretention Filter	Virginia Tech Visitor and Undergraduate Admissions Center 925 Prices Fork Road Blacksburg, VA 24061	37-13-50 N	80-26-6 W	0.9	0.47	1.37	07/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0046	Visitor's Center - Bioretention Filter 2	Existing	Bioretention Filter	Virginia Tech Visitor and Undergraduate Admissions Center 925 Prices Fork Road Blacksburg, VA 24061	37-13-51 N	80-26-4 W	0.34	0.14	0.42	07/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0047	Visitor's Center - Bioretention Filter 3	Existing	Bioretention Filter	Virginia Tech Visitor and Undergraduate Admissions Center 925 Prices Fork Road Blacksburg, VA 24061	37-13-48 N	80-26-5 W	0.47	0.16	0.4	07/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0048	Visitor's Center - Bioretention Filter 5	Existing	Bioretention Filter	Virginia Tech Visitor and Undergraduate Admissions Center 925 Prices Fork Road Blacksburg, VA 24061	37-13-48 N	80-25-59 W	1.53	0	2.99	07/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0049	ASA - Underground Storage Tank 1	Existing	Underground Detention Center	Virginia Tech Lavery Hall 430 Old Turner Street Blacksburg, VA 24061	37-13-52 N	80-25-22 W	0.08	1.15	1.23	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0050	ASA - Underground WQU 1	Existing	Underground WQU, Contech Stormfilter	Virginia Tech Lavery Hall 430 Old Turner Street Blacksburg, VA 24061	37-13-52 N	80-25-22 W	0.08	1.15	1.23	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17

BMP_0051	ASA - Underground Storage Tank 2	Existing	Underground Detention Center	Virginia Tech Lavery Hall 430 Old Turner Street Blacksburg, VA 24061	37-13-52 N	80-25-22 W	0.01	0.86	0.87	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0052	ASA - Underground WQU 2	Existing	Underground WQU, Contech Stormfilter	Virginia Tech Lavery Hall 430 Old Turner Street Blacksburg, VA 24061	37-13-52 N	80-25-22 W	0.01	0.86	0.87	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0053	ASA - Biofilter	Existing	WQU - Contech Urbangreen Biofilter	Virginia Tech Lavery Hall 430 Old Turner Street Blacksburg, VA 24061	37-13-52 N	80-25-22 W	0.1	0.18	0.28	01/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0054	SPE Filterra Unit 1	Existing	Filterra Unit	Virginia Tech Oak Lane Community Blacksburg, VA 24061	37-13-30 N	80-26-08 W	0.11	0.42	0.53	08/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0055	SPE Filterra Unit 2	Existing	Filterra Unit	Virginia Tech Oak Lane Community Blacksburg, VA 24061	37-13-30 N	80-26-08 W	0.15	0.52	0.67	08/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0056	SPE Underground Detention Piping	Existing	Underground Detention Pipe	Virginia Tech Oak Lane Community Blacksburg, VA 24061	37-13-30 N	80-26-08 W	0.51	0.35	0.86	05/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0057	VMIA - Detention Swale	Existing	Detention Swale	Virginia Tech 215 Duck Pond Drive Blacksburg, VA 24061	37-13-07 N	80-25-41 W	0.09	0.25	0.34	11/2012	NE59	Stroubles Creek	Operator-owned	-	Jan-17
BMP_0058	VMIA - Filterra Unit	Existing	Filterra Unit	Virginia Tech 215 Duck Pond Drive Blacksburg, VA 24061	37-13-07 N	80-25-41 W	0.01	0.23	0.24	11/2012	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0060	CFTA Water Quality Unit 1	Existing	Stormceptor Underground WQU	Virginia Tech 190 Alumni Mall Blacksburg, VA 24061	37-13-52 N	80-25-02 W	2.01	4.43	6.44	07/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0061	CFTA Water Quality Unit 2	Existing	Stormceptor Underground WQU	Virginia Tech 190 Alumni Mall Blacksburg, VA 24061	37-13-53 N	80-25-00 W	1.06	1.82	2.88	07/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0062	CFTA Underground Detention	Existing	Underground Detention Facility	Virginia Tech 190 Alumni Mall Blacksburg, VA 24061	37-13-54 N	80-25-01 W	1.94	1.82	3.76	07/2013	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0065	VT Airport Extended Detention Basin	Existing	Extended Detention	Virginia Tech Montgomery Executive Airport 1601 Research Center Drive Blacksburg, Va 24060	37-12-20 N	80-24-41 W	5.69	2.44	8.13	06/2005	NE59	Stroubles Creek	Privately-owned	Y	Dec-16
BMP_0071	Drillfield Road Improvements Filterra Unit 1 - NE Corner	Existing	MTD Filterra Unit	Virginia Tech Campus Drillfield Drive Blacksburg, Va 24061	37-13-46 N	80-25-17 W	0.06	0.24	0.3	4/4/2016	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0072	Drillfield Road Improvements Filterra Unit 2 - SE Corner	Existing	MTD Filterra Unit	Virginia Tech Campus Drillfield Drive Blacksburg, Va 24061	37-13-40 N	80-25-1 W	0.22	0.19	0.41	4/4/2016	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0073	IATF Filterra Unit 1	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24061	37-13-16 N	80-25-2 W	0	0.24	0.24	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0074	IATF Filterra Unit 2	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24062	37-13-16 N	80-25-2W	0	0.19	0.19	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0075	IATF Filterra Unit 3	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24063	37-13-18	80-25-0 W	0	0.19	0.19	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0076	IATF Filterra Unit 4	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24064	37-13-18 N	80-25-0.7 W	0	0.24	0.24	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0077	IATF Filterra Unit 5	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24065	37-13-19 N	80-25-1 W	0	0.24	0.24	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0078	IATF Filterra Unit 6	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24066	37-13-20 N	80-25-2 W	0	0.24	0.24	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0079	IATF Filterra Unit 7	Existing	MTD Filterra Unit	Virginia Tech 530 Stadium Road Blacksburg, Va 24067	37-13-20 N	80-25-3 W	0	0.19	0.19	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0080	IATF Underground Detention	Existing	MTD Underground Detention Pipe	Virginia Tech 530 Stadium Road Blacksburg, Va 24068	37-13-17 N	80-25-2 W	0	1.29	1.29	9/17/2015	NE59	Stroubles Creek	Operator-owned	-	Jun-17
BMP_0082	MARCHING VIRGINIANS Extended Detention Basin (aka redesigned Chicken Hill Sediment Basin)	Existing	Extended Detention	Virginia Tech 821 Southgate Drive Blacksburg, VA 24061	37-12-57 N	80-24-59 W	12.79	2.72	15.51	07/2016	NE59	Stroubles Creek	Operator-owned	-	Jan-17
BMP_0083	MARCHING VIRGINIANS Extended Detention Basin	Existing	Enhanced Extended Detention	Virginia Tech 821 Southgate Drive Blacksburg, VA 24061	37-12-53 N	80-24-51 W	32.16	6.23	38.39	07/2016	NE59	Stroubles Creek	Operator-owned	-	Jan-17

Appendix E – Annual Report Active Project List

Virginia Tech 2017 MS4 Annual Report

MCM 4 - BMP 4.1: Active and Proposed Land Disturbing Projects

Active Land Disturbing Projects requiring VAR10 Permit Coverage:

1. Runway 12-30 Extension – Phase 1 & Phase 2 (143)
2. New Classroom Building (6.02)
3. Upper Quad Residential Facilities (14)
4. Tom’s Creek Landfill (21)
5. Dairy Barn Relocation (32) (NoT: 2016.07.22)
6. Virginia Tech Marching Virginians Practice Facility (15.58)
7. O’Shaughnessy Hall (1.77)
8. Virginia Tech Hangar Site Design – Phase 1 (9.98)
9. Baseball Stadium Improvements (.11)
10. Rector Field House Addition (.07)

Active ESC Only Land Disturbing Projects:

1. Virginia Tech Hangar Project (0.75)
2. APR Building (.80)
3. Virginia Tech Derring Hall Stair Replacement (0.43)
4. ATMOS Gas Line (9.1)
5. Underground Storage Tank Demolition (0.18)
6. Davidson Hall – Renovate/Renew (0.52)
7. Sandy Hall – Renovate/Renew (0.59)
8. Liberal Arts Building – Renovate/Renew (0.65)
9. VBI Data Center (.06)
10. Moss Arts Amphitheater (0.23)

Proposed Projects:

1. Multi-Modal Transit Facility
2. Health Center Improvements
3. Propulsion Lab
4. Virginia Bioinformatics Institute Addition
5. Corps Leadership & Military Science Building
6. Chilled Water Infrastructure Expansion
7. BETR Building
8. MRL Building
9. Hyperloop
10. Hahn Pedestrian Tunnel
11. Dietrick First Floor & Plaza Renovations
12. Undergraduate Science Laboratory
13. Phi Gamma Delta House

Notes:

(NoT: YYYY.MM.DD) Notice of Termination date.

(xx.xx) Total Limits of Disturbance in acres.

Virginia Tech 2017 MS4 Annual Report

MCM 4 - BMP 4.2: Number of Inspections (per project for FY 2017)

Project Name	Total Inspections Per Year
Moss Arts Amphitheater	4
Upper Quad Residential Facilities	31
New Classroom Building	38
Virginia Tech Hanger Site Design – Phase 1	5
Virginia Tech Hangar Project	7
Davidson Hall – Renovate/Renew	5
Liberal Arts Building – Renovate/Renew	5
Underground Storage Tank Demolition	5
Baseball Stadium Improvements	5
Rector Field House Addition	5
O’Shaughnessy Hall	4
VBI Data Center	4
Sandy Hall – Renovate/Renew	5
Tom’s Creek Landfill	18
ATMOS Gas Line	14
Virginia Tech Derring Hall Stair Replacement	9
Marching Virginians	8
APR Building	18
Runway 12-30 Extension Phase 1 & Phase 2	28
Dairy Barn Relocation	12
Total Inspections	233

Summary of Enforcement Actions

During the reporting year an incident was addressed at the Moss Arts Amphitheater project on May 17, 2017. Construction began before there was an approved Erosion and Sediment Control Plan, which violated Virginia Tech Annual Standards and Specifications and ESC law. A notice to stop work was issued under the building and trade permits and was not lifted until the violation was resolved.

Appendix F – Training Table

Training Department	Training Date	Number of Attendees	Training Objective
Dining Services	7/11/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	7/18/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	7/25/2016	12	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/1/2016	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/5/2016	4	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/8/2016	12	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/9/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/11/2016	5	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/12/2016	5	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/15/2016	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/16/2016	5	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/17/2016	16	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/19/2016	62	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/22/2016	68	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/23/2016	5	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/24/2016	19	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/26/2016	44	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/27/2016	41	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/29/2016	16	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	8/31/2016	33	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/2/2016	48	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/5/2016	71	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/6/2016	25	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/7/2016	9	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/9/2016	43	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/12/2016	26	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/13/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/14/2016	18	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/16/2016	43	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/19/2016	15	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/20/2016	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/21/2016	15	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/22/2016	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/23/2016	43	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/26/2016	17	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/27/2016	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/28/2016	19	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/29/2016	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	9/30/2016	36	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/3/2016	13	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/4/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/5/2016	12	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/7/2016	34	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/10/2016	14	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/11/2016	2	New Hire Orientation and MS4 Stormwater Briefing

Dining Services	10/12/2016	11	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/14/2016	16	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/17/2016	19	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/18/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/21/2016	36	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/24/2016	13	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/26/2016	9	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/28/2016	23	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	10/31/2016	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/1/2016	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/2/2016	9	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/4/2016	25	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/7/2016	10	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/8/2016	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/9/2016	4	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/11/2016	20	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/14/2016	5	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/15/2016	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/16/2016	10	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/17/2016	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/28/2016	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	11/30/2016	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	12/2/2016	13	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	12/5/2016	12	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	12/7/2016	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	12/9/2016	10	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	12/12/2016	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/9/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/11/2017	4	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/13/2017	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/16/2017	9	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/18/2017	14	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/19/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/20/2017	43	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/23/2017	15	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/24/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/25/2017	14	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/26/2017	22	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/27/2017	36	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	1/30/2017	10	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/1/2017	15	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/2/2017	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/3/2017	35	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/6/2017	14	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/7/2017	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/8/2017	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/9/2017	1	New Hire Orientation and MS4 Stormwater Briefing

Dining Services	2/10/2017	29	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/13/2017	8	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/14/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/15/2017	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/17/2017	25	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/20/2017	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/22/2017	11	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/24/2017	26	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/27/2017	3	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	2/28/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/1/2017	13	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/2/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/13/2017	11	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/14/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/15/2017	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/17/2017	28	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/20/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/21/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/22/2017	9	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/23/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/24/2017	21	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/27/2017	8	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/28/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/29/2017	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/30/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	3/31/2017	16	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/3/2017	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/5/2017	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/6/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/7/2017	12	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/10/2017	4	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/12/2017	6	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/14/2017	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/19/2017	4	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/21/2017	10	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/25/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	4/28/2017	7	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	5/1/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	5/8/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	6/1/2017	1	New Hire Orientation and MS4 Stormwater Briefing
Dining Services	6/26/2017	2	New Hire Orientation and MS4 Stormwater Briefing
Facilities	9/21/2016	42	MS4 Awareness Training
Facilities	1/4/2017	53	MS4 Awareness Training
Facilities	1/5/2017	30	MS4 Awareness Training

Appendix G – Program Evaluations

Appropriateness of the high-priority stormwater issues

Sediment

Stroubles Creek remains impaired due to sediment load and poor aquatic diversity. The potential remains for Stroubles Creek to receive sediment loads from eroded areas on campus, active construction sites, and unpaved sections of Plantation Road. As a result, sediment is an appropriate high-priority water quality issue and will remain a focus of pollution prevention efforts.

Animal Waste

High levels of fecal indicator bacteria (FIB) are the leading cause of surface water quality impairments in the United States (USEPA, 2012). Stroubles Creek is currently included on the Commonwealth of Virginia's 303(d) impairment list due to elevated *E. coli* concentrations. The StREAM Lab and faculty from the Biological Systems Engineering department regularly sample FIB concentrations. Waterfowl at campus stormwater management facilities and the Duck Pond, as well as domestic and agricultural animal waste are the most likely contributors to higher levels of FIB in Stroubles Creek. Animal waste remains an appropriate high-priority stormwater issue.

Trash

In assessing the volume of trash gathered from Stroubles Creek during every stream clean-up, it is clear that trash is still a high-priority issue on the Virginia Tech campus. We are hopeful that certain campus initiatives will mitigate some of the trash – but still anticipate trash as a high priority stormwater issue due to constant foot traffic and the influx of campus visitors during football season.

Appropriateness of the selected target audiences for each high-priority stormwater issue

On-Campus Students

On-campus students remain as a prominent and important part of the Virginia Tech campus community and therefore are still very relevant in Virginia Tech stormwater pollution prevention.

Sediment: All target audiences are liable to contribute to pathway erosion around Virginia Tech's main campus whether on bike or on foot.

Animal Waste: On-campus students often have family visits that include the family pet and/or feeding the ducks at the Duck Pond.

Trash: All campus community members have the potential to litter. On-campus students are the most frequent target audience to use dining halls and therefore are more likely to litter and/or disregard proper disposal procedures for the plastics and food containers used in the dining halls. On-campus students also attend sporting events and participate in a multitude of campus activities that make them susceptible to accidentally (or purposely) littering.

Off-Campus Students

Off-campus students remain as a prominent and important part of the Virginia Tech campus community and therefore are still very relevant in stormwater pollution prevention.

Sediment: All target audiences are liable to contribute to pathway erosion around Virginia Tech's main campus whether on bike or on foot.

Animal Waste: Off-campus students often bring their pets to campus to take walks and may feed the ducks at the Duck Pond.

Trash: All campus community members have the potential to litter. Off-campus students also frequent dining halls, attend sporting events, and participate in campus activities that make them susceptible to accidentally (or purposely) littering.

Faculty/Staff

Faculty/Staff members remain as a prominent and important part of the Virginia Tech campus community and therefore are still very relevant in stormwater pollution prevention.

Sediment: All target audiences are liable to contribute to pathway erosion around Virginia Tech's main campus whether on bike or on foot.

Animal Waste: Community members (including faculty and staff) will visit the Duck Pond to feed the ducks, which contribute to the ducks' continued residency at the pond. Some faculty and staff members also live close enough to campus to walk their pets as well.

Trash: All campus community members have the potential to litter. Faculty/staff attend sporting events and participate in a multitude of campus activities, including job responsibilities, which make them to susceptible to accidentally (or purposely) littering.

Effectiveness of the message or messages being delivered: During Year 4, Virginia Tech was able to reach 100% of the on-campus student target audience through the move-in packets initiative. It is harder to quantify the off-campus student and faculty staff target audience but it is estimated that at least 20% of each was reached this year as well. Documentation of target audience percentages is available upon request. As stated in the Year 1 Annual Report Program Evaluation for MCM 1, the messages that were utilized were more direct and focused on the target audiences and high priority water quality issue. The focused messages assisted in encouraging more innovative approaches such as the football tailgating signage, pet waste station public advertisements, and stormwater management training. The off-campus student outreach is still more difficult to quantify and as result Virginia Tech will be working to improve this in remaining years of this permit.

Effectiveness of the mechanisms of delivery employed in reaching the target audiences: The mechanisms used in the Virginia Tech outreach program utilize electronic mediums, hardcopy publications, and high-traffic settings such as Steppin' Out, Facebook, and Twitter. Techniques may need to be further refined to address each target audience. The Housing and Residence Life packets were successful in specifically reaching on-campus students, but other events and mechanisms were not as clearly defined in regards to their intended target audience. During Year 4, Site & Infrastructure Development has been looking at different methods to better reach the off-campus and Faculty/Staff target audiences. This effort will be explored and improved in the remaining years of the permit. As stated above, It was determined that the off-campus student and Faculty/Staff reach was more difficult to quantify and as result Virginia Tech will be working to improve this in the remaining years of this permit

Appropriateness of the BMPs outlined in the Program Plan:**1.1 Targeting Public Outreach Events for Target Audiences (VT Students & Staff)**

Site & Infrastructure Development determined that the sections under BMP 1.1 did directly overlap with each other and as a result were combined into one BMP. This was done in an effort to more clearly define the descriptions and goals of BMP 1.1 so that all associated target audiences could be reached more successfully and efficiently. Please see the modification section below for more information.

1.2 Targeting Public Outreach Materials for Target Audiences

BMP 1.2 and its associated sections provide a forum for Virginia Tech Site & Infrastructure Development to highlight their varied approaches to public outreach and education. Although target audiences may need to be more clearly addressed in these efforts, the structure of the BMP is sufficient and remains appropriate in the Program Plan.

Modification of roles & responsibilities for this MCM:

As stated previously, Site & Infrastructure Development (SID) intends to partner and sponsor more events that have stormwater-relevant impact. This means the role of SID as the event planner will be less prominent as will be their role in the sponsorship and involvement with other departments such as the Office of Energy and Sustainability, Sustainable Dining, Alternative Transportation, as well as student organizations.

Any changes to identified BMPs or measurable goals:

Site & Infrastructure Development determined that the sections under BMP 1.1 did directly overlap with each other and as result were combined into one BMP. This was done in an effort to more clearly define the descriptions and goals of BMP 1.1 so that all associated target audiences could be reached more successfully and efficiently

Steps to be taken to address deficiencies:

Techniques may need to be further refined to address each target audience. The Housing and Residence Life packets were successful in specifically addressing on-campus students, but other events and mechanisms were not as clearly defined in regards to their intended target audience.

Plans for the next reporting cycle:

Site & Infrastructure Development will be focusing more on reaching the off-campus target audience as well as refining the methods of quantifying the percentage reached. In conjunction with the Town of Blacksburg, Virginia Tech would like to send out stormwater informational mailings to apartment complexes around town to reach more of the off-campus student population.

Appropriateness of the BMPs outlined in the Program Plan

2.1 Promote Availability of the MS4 Program Plan and Annual Reports

As a permit requirement, this BMP remains an appropriate part of the Program Plan. In the past, Virginia Tech has had limited review and/or comment of the Program Plan and Annual Reports. This BMP will encourage innovative means to solicit feedback.

2.1.1 Promotion through Electronic Mediums

Virginia Tech utilizes electronic mediums as a means to connect with a younger audience. Each year electronic interactions with campus community members increase in regards to the MS4 Program Plan as well as general stormwater pollution prevention. Therefore, this remains as an appropriate BMP in the Program Plan.

2.2 Public Involvement/Participation

As a permit requirement, this BMP remains as an appropriate part of the Annual Report.

2.2.1 Stream Clean-ups/Adopt-A-Stream

Stream clean-ups provide a direct opportunity for interaction within the Stroubles Creek watershed. Virginia Tech Site & Infrastructure Development is required to sponsor clean-ups as a part of the Adopt-A-Stream program and has slowly built partnerships and more regular volunteer efforts. Therefore, this remains as an appropriate BMP in the Program Plan.

2.2.2 Volunteer Events

Volunteer events are the core of the Public Involvement BMP – with that being said, it does directly overlap with the Stream Clean-up BMP and also with the Storm Drain Marking BMP in MCM1. Unless Site & Infrastructure Development addresses this overlap and/or participates in additional volunteer events, this BMP may not be appropriate in the Program Plan.

Modification of roles & responsibilities for this MCM: Student organizations that participated in this year's stream clean-ups will, with regular communication, become the core volunteer groups for future clean-ups. Therefore, Site & Infrastructure Development might become the coordinating entity while the volunteer effort and promotion of the event will be accomplished through the student organizations themselves.

Changes to identified BMPs and/or measurable goals: There does not seem to be an appropriate location in the BMPs to discuss the recently installed pet waste stations. Site & Infrastructure Development may consider adding and/or altering a BMP to address situations like this one. Also, as stated above, BMP 2.2.2 may need to be reevaluated in the Program Plan.

Steps to be taken to address deficiencies: Site & Infrastructure Development will address any BMP deficiencies in the Program Plan and take into account campus pet waste stations and additional volunteer events.

Plans for the next reporting cycle: Site & Infrastructure Development will continue to find new volunteer events while continuing the established partnership that has been developed with the Town of Blacksburg for events like The Big Event. Stream clean-ups may become more regular with increased interest from student groups. Site & Infrastructure Development will be focusing on reaching out to more student organizations in order to increase the number and type of volunteer events that occur each year.

Appropriateness of the BMPs outlined in the Program Plan

3.1 Illicit Discharge Detection Program

BMP 3.1 and its associated BMPs cover the basic components of the IDDE Program as outlined in the permit. It particularly pieces out the “detection” components, which include a regularly updated storm sewer map, a regular outfall reconnaissance inventory, an identification of priority areas, and a reporting mechanism for staff and students. All of these pieces give Virginia Tech the tools to detect potential illicit discharges and mitigate the issues as soon as possible. All BMPs are still relevant and appropriate in the Program Plan.

3.2 Illicit Discharge Elimination

BMP 3.2 and its associated BMPs cover the basic components of the IDDE Program as outlined in the permit. It particularly pieces out the “elimination” and response components which include policymaking activities to prohibit illicit discharges altogether as well as a tracking mechanism to trace, remove, and document illicit discharges. All BMPs are still relevant and appropriate in the Program Plan.

3.3 MS4 Interconnections

Interaction with MS4 interconnections regarding illicit discharges and priority areas is crucial to a successful IDDE Program. This BMP is still relevant and appropriate in the Program Plan.

Modification of roles & responsibilities for this MCM: The LEWAS lab that is overseen by the Engineering Education Department has set up stream monitoring equipment on the Webb Branch portion of Stroubles Creek. A feature of the monitoring station is that it is able to send alerts out to applicable VT and Town of Blacksburg personnel when certain water quality parameters are out of range. These alerts have helped Virginia Tech respond to illicit discharges more quickly and efficiently.

Changes to identified BMPs and/or measurable goals: No BMPs need to be changed at this time.

Steps to be taken to address deficiencies: Site & Infrastructure Development will continue to bolster public outreach and awareness, which will hopefully lessen the number of illicit discharges in the next annual reporting cycle.

Plans for the next reporting cycle: Site & Infrastructure Development hopes to continue building upon pre-existing procedures in the Virginia Tech Police Department to maintain regular communication regarding environmental spills, etc. With the addition of the LEWAS Lab alerts, Site & Infrastructure Development hopes that more illicit discharges can be detected and traced back to the source. Site & Infrastructure Development will also be working on the Stormwater Management Policy development and approval during the next reporting cycle.

Appropriateness of the BMPs outlined in the Program Plan

4.1 Management of Construction Site Stormwater Runoff

The BMPs listed within section 4.1 are, for the most part, permit requirements. Therefore, they remain appropriate in the Program Plan. Additional tracking requirements in the new permit will encourage enhanced document management and a comprehensive filing system from the beginning to the end of a project cycle.

Modification of roles & responsibilities for this MCM: Site & Infrastructure Development has been working with a consultant to update Virginia Tech's Annual Standards and Specifications for Erosion and Sediment Control and Stormwater Management. The updated Annual Standards and Specifications will be submitted to DEQ for approval by September 30, 2017.

Changes to identified BMPs and/or measurable goals: Pre-construction meetings have been added to BMP 4.1.2 Design Phase Meetings. Although design phase meetings and preconstruction meetings serve separate functions, they both are a means to ensure the project is designed and constructed according to stormwater regulations.

Steps to be taken to address deficiencies: Virginia Tech Site & Infrastructure Development will submit a revised version of the Annual Standards and Specifications for ESC and SWM to the DEQ by September 30, 2017.

Plans for the next reporting cycle: Once implementation begins for the new and approved Virginia Tech Annual Standards and Specifications, VT SID will hold training sessions for project managers and designers. Documentation of all training sessions will be included in future MS4 Annual Reports, as appropriate.

Appropriateness of the BMPs outlined in the Program Plan

5.1 Stormwater Management Facilities

This BMP includes corresponding tracking, inspection, and maintenance sections. These three parts make up a comprehensive post-construction stormwater management facility program. Therefore, these BMPs remain appropriate as part of the Program Plan.

Modification of roles & responsibilities for this MCM: Due to the increasing number of manufactured BMPs and the technical expertise needed for their maintenance, Site & Infrastructure Development is currently looking into different means and methods to improve the current maintenance program for manufactured BMPs.

Changes to identified BMPs and/or measurable goals: Since the three components of the MCM 5 program include tracking, inspection, and maintenance, Site & Infrastructure Development has altered the title of BMP 5.1 to encompass all three components of the program.

Steps to be taken to address deficiencies: A responsible party database is an ongoing effort and is being created for all current BMPs on campus. The database also includes maintenance requirements and frequency of maintenance needs for manufactured BMPs, etc. This database will assist in the management of the MCM5 program for Site & Infrastructure Development.

Plans for the next reporting cycle: Site & Infrastructure Development will continue developing the responsible party database for all current BMPs on campus. Due to the increasing number of manufactured BMPs and the technical expertise needed for their maintenance, Site & Infrastructure Development will look into different means and methods to improve the current maintenance program for manufactured BMPs.

Appropriateness of the BMPs outlined in the Program Plan

6.1 Municipal Facility Pollution Prevention and Good Housekeeping

As permit requirements, components in BMP 6.1 remain appropriate in the Program Plan.

6.2 Landscaping Management and Pest Control

Landscaping and pest control are two activities that occur frequently and have potential to cause stormwater pollution. They remain relevant as part of the Program Plan.

6.3 Personnel Training

As a permit requirement, personnel training and the Annual Written Training Plan remain an appropriate BMP in the Program Plan. The new permit requirements will encourage continued and enhanced training programs regarding stormwater-specific pollution prevention practices.

6.4 Management of Municipal Facilities

The three corresponding BMPs include street sweeping, salt application, and stormwater structure cleaning. These are three crucial components of pollution prevention and MCM6. They remain appropriate and relevant in the Program Plan.

Modification of roles & responsibilities for this MCM: With high priority areas properly addressed, it is now important to establish responsible parties and appropriate procedures to ensure that each area is properly transitioned into SWPPP implementation.

Changes to identified BMPs and/or measurable goals: BMP 6.1.2 and BMP 6.1.3 will be reassessed and possibly modified to reflect SWPPP implementation. They are organized as such in the Program Plan due to the new permit requirements. BMP 6.3.1 may be incorporated into BMP 6.3.2 if it shows there are limited training plan updates in upcoming annual reporting cycles.

Steps to be taken to address deficiencies: N/A

Plans for the next reporting cycle: Next steps include working with all personnel and operations on each high priority site to begin SWPPP Implementation. Those facilities that did not qualify as both high priority and high potential will be incorporated into the illicit discharge detection and elimination (IDDE) program. All locations will be tracked using ArcGIS.

Appendix H – Documentation of Public Participation Activities

Big Event 2017 – Storm Drain Marking

Virginia Tech SID participated in the **Big Event** on April 8, 2017 by providing storm drain markers and necessary tools for a group of volunteers to mark storm drains. The group marked approximately 60 new unmarked storm drains in the Town of Blacksburg. This outreach event targeted illicit discharge and water quality protection.



Tree Planting and Clean-up Events – Stroubles Creek

Two volunteer events occurred in April 2017 and included volunteers from the **College of Natural Resources** who helped remove invasive species along stream banks as well as plant 297 trees and shrubs to create a riparian buffer and support enhanced water quality along Holton Branch.





Virginia Adopt-a-Stream
Stream Cleanup Data Form

Date: 10/22/2016 Stream Adopted: STRAUBLES CREEK

Adopting organization: VT. SITE & INFRASTRUCTURE DEVELOPMENT

Name of contact person: LAUREN GRIMES

Phone Number: 540-231-3716

City/County: BLACKSBURG, VA / MONTGOMERY COUNTY

Map location from county road map (if available): _____

Location of stream section cleaned (if possible please provide names of road crossings and/or attach a map):
Attached in email
Areas #1 and 4

Number of miles cleaned: ~2 miles

Number of participants, Adults: 18 Children: 0

Number of trash bags collected: 7 bags (4 - Area 1, 3 - Area 4)

Type of trash collected: plastic bottles, cans, food wrappers

Most unusual item found: Christmas Tree, Bicycle, Shoe

Cleanup time (in hours): 1.5 hours

Comments: Volunteer Group
VT Chapters: EWRI/COPRI, ASCE, AWWA



Virginia Adopt-A-Stream Program Cleanup Sign-in Sheet

Page 1 of 2

Adopting Organization Vt SITE & INFRASTRUCTURE DEVELOPMENT

Date of cleanup: OCT 22, 2010

Waterway Name STROUBUES CREEK

Name	EMAIL ADDRESS	City	State	Volunteer		Do You LIVE ON/OFF CAMPUS?	Over 18?
				Group			
MARK PEARCE	probe93@vt.edu					OFF	✓
Samuel Abernethy	Samuel@vt.edu		NC			OFF	✓
Ryan Stevens	Ryan14@vt.edu		TN	ASCE		OFF	✓
Wendy REYES	wendyaxo@vt.edu		VA	ASCE		off	✓
MARK CHENG	markc27@vt.edu		VA			off	✓
Akshay Jain	aksj11@vt.edu		VA	VA MWAA / MWEA		off	✓
TREVOR RUDDLE	rtrevor@vt.edu		PA	ASCE		ON	✓
Ike Li	like@vt.edu		VA	AMWA		OFF	✓
Lu Guan	lguan@vt.edu		VA	AMWA / MWAA		OFF	✓
Eric Mwench	emwench@vt.edu		VA	AMWA		ON	✓
Jim Keating	pljames7@vt.edu		VA	AMWA		OFF	✓
Brooke Maloney	bro2210@vt.edu		VA	ASCE		OFF	✓

Virginia Adopt-A-Stream Program Cleanup Sign-in Sheet

Page 2 of 2

Adopting Organization Vt State Infrastructure Development

Date of cleanup: OCT 22, 2010

Waterway Name STPOURBUS CREEK

Name	EMAIL ADDRESS	City	State	Volunteer		Do You LIVE	
				Group		ON/OFF CAMPUS?	Over 18?
Carl Grey	g.carl3@vt.edu	Blacksburg	VA	EWR		OFF	yes
Katherine Senthir	ksenthir2@vt.edu	Blacksburg	VA	EWR		OFF	yes
Kristen Brooks	kbros193@vt.edu	Blacksburg	VA	EWR		off	yes
Clint Martin	clintm@vt.edu	Blacksburg	VA	EWR		off	yes
BHARANI RAJASEKARAN	bhar13@vt.edu	Blacksburg	VA	EWR		OFF	yes
Pamela Rusinko	pamemr2@vt.edu	Christiansburg	VA	EWR-I		OFF	yes